



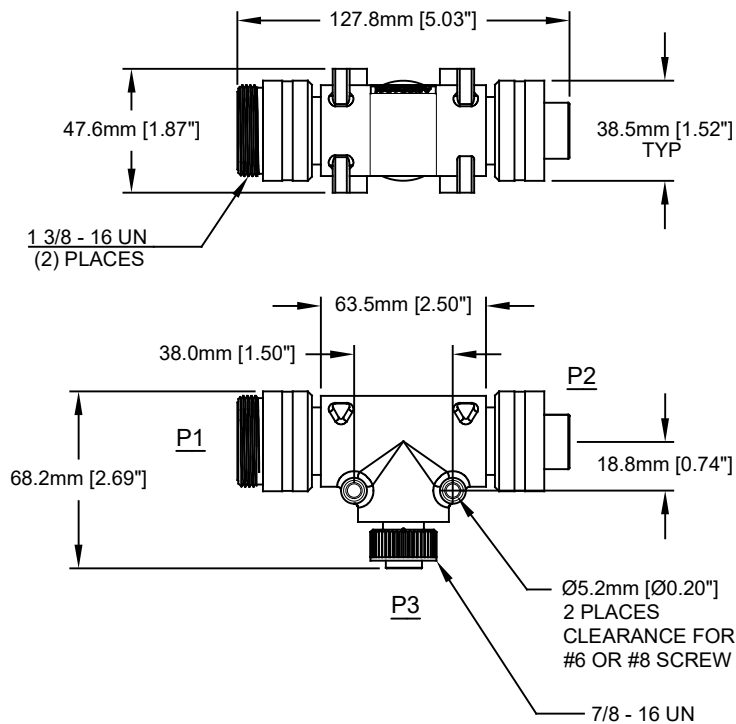

REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	TECHNICAL DATA SHEET RELEASE	12-MAY-14	KMM	RFC
B1	-	REVISED THE WIRING DIAGRAM	16-MAY-18	MRF	JB

WIRING DIAGRAM

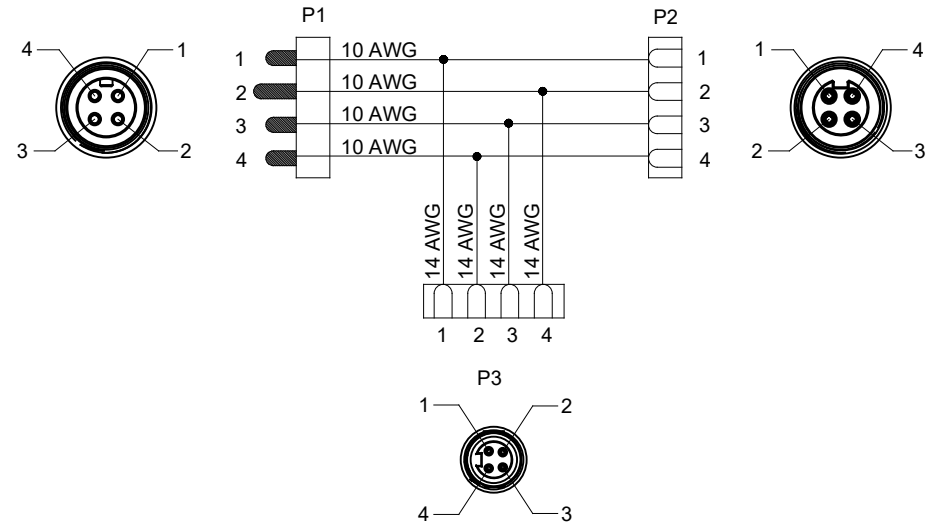

TECHNICAL DATA:

- MATERIALS:**
COUPLING NUT: MACHINED ALUMINUM, ANODIZED
INSULATION INSERT: THERMOPLASTIC, UL 94/V-0
CONTACT: GOLD FLASH PLATING OVER COPPER ALLOY
OVERMOLD MATERIAL: THERMOPLASTIC COLOR: BLACK
CONDUCTOR INSULATION: PVC
- ELECTRICAL DATA:**
CURRENT (MAX): 15A
VOLTAGE (MAX): 600V AC/DC
INSULATION RESISTANCE (MIN): 5000M OHMS
DIELECTRIC TEST VOLTAGE: 2200V
SHORT CIRCUIT AMPERAGE RATING: 65kA - BREAKERS AND FUSES
- MECHANICAL DATA:**
TEMPERATURE RANGE: -40°C TO 90°C
PROTECTION: IP67 (MATED CONDITION)
MATING CYCLES: >500
VIBRATION RESISTANCE PER MIL-STD-202 METHOD 204
THERMAL SHOCK PER MIL-STD-202 METHOD 207
48 HOUR SALT SPRAY PER MIL-STD-202 METHOD 101
- RoHS COMPLIANT**
- UL 2237 LISTED ASSEMBLY**
UL FILE NUMBERS: E339703

		PART NUMBER		DESCRIPTION		ITEM	
QUANTITY		MATERIALS LIST					
UNLESS OTHERWISE SPECIFIED:		SIGNATURES		DATE		Amphenol Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036 M35 PB LITE, 4 PIN, REDUCING TEE, BLACK M35 - M35 - M22	
1) All dimensions are in metric (mm).		DRAWN: KMM		12-MAY-14			
2) Tolerances are as follows:		CHECKED: MRF		12-MAY-14			
1 PL DEC ±0.30 Fractions ±1/64		ENGINEER: KMM					
2 PL DEC ±0.15 Angles ±1°		APPROVAL: RFC		12-MAY-14			
3) Note reference = 		CUSTOMER:					
MATERIAL SPECIFICATIONS:		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.				SIZE: C- TYPE: HALF DWG NO: P28968 REVISION: B1	
PROCESS SPECIFICATIONS:		NEXT ASSY:					
SCALE: HALF		C-P28968		SHEET 1		OF 1	

TITLE: M35 PB LITE, 4 PIN, REDUCING TEE, BLACK
DWG NO: C-P28968
REV: B1
Sht: 1
OF: 1