

## DIN-Power coding pin



Image is for illustration purposes only. Please refer to product description.

|                    |   |
|--------------------|---|
| Part number        | 09 04 000 9908  |
| Specification      | DIN-Power coding pin  |
| HARTING eCatalogue | <a href="https://harting.com/09040009908">https://harting.com/09040009908</a> |

### Identification

|                              |                               |
|------------------------------|-------------------------------|
| Category                     | Accessories                   |
| Series                       | DIN 41612                     |
| Type of accessory            | Coding pin                    |
| Description of the accessory | for types D, E, F, FM, 2F, MH |

### Material properties

|   |               |
|---|---------------|
| Material (accessories)                    | Thermoplastic |
| Colour (accessories)                      | Black         |
| Material flammability class acc. to UL 94 | V-0           |
| RoHS                                      | compliant     |
| ELV status                                | compliant     |
| China RoHS                                | e             |
| REACH Annex XVII substances               | Not contained |
| REACH ANNEX XIV substances                | Not contained |
| REACH SVHC substances                     | Not contained |

### Specifications and approvals

|                        |                              |
|------------------------|------------------------------|
| Railway classification | F4/I3 acc. to NFF 16-101/102 |
|------------------------|------------------------------|


### Commercial data

|                   |         |
|-------------------|---------|
| Packaging size    | 100     |
| Net weight        | 0.038 g |
| Country of origin | Germany |

## Commercial data

|                                |   |
|--------------------------------|---|
| European customs tariff number | 85389099                                  |
| GTIN                           | 5713140008182                             |
| ETIM                           | EC002311                                  |
| eCl@ss                         | 27440203 Coding for industrial connectors |

## Coding pin

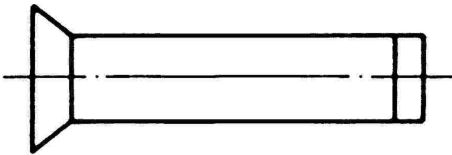

To avoid accidental and incorrect mating of adjacent connectors a coding system is required. The coding is achieved by means of a coding pin which is inserted into the selected chamber of the female connector (the contact cavity must be filled with a female contact!). The opposite male contact must be removed with the help of the specially designed tool. It's recommended to use a number of coding pins in relation to the total number of contacts per connector: 3 pins for 64 contacts, 7 pins for 160 contacts.