

## Han TC100-HMC-MC-CRT-25 mm<sup>2</sup>-AU

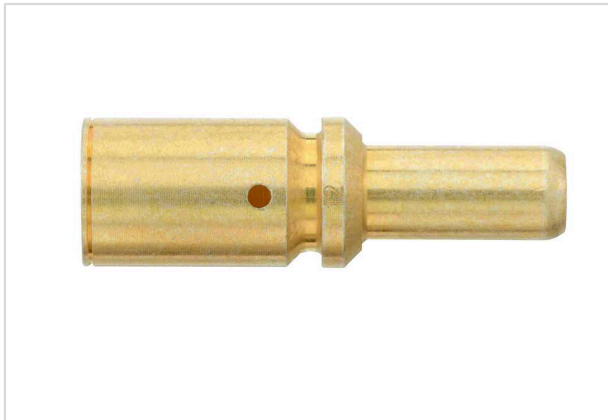


Image is for illustration purposes only. Please refer to product description.

|                    |                                                                               |
|--------------------|-------------------------------------------------------------------------------|
| Part number        | 09 11 200 6125                                                                |
| Specification      | Han TC100-HMC-MC-CRT-25 mm <sup>2</sup> -AU                                   |
| HARTING eCatalogue | <a href="https://harting.com/09112006125">https://harting.com/09112006125</a> |

### Identification

|                 |               |
|-----------------|---------------|
| Category        | Contacts      |
| Series          | TC 100        |
| Type of contact | Crimp contact |

### Version

|                       |                   |
|-----------------------|-------------------|
| Termination method    | Crimp termination |
| Gender                | Male              |
| Manufacturing process | Turned contacts   |

### Technical characteristics

|                           |                                         |
|---------------------------|-----------------------------------------|
| Conductor cross-section   | 25 mm <sup>2</sup>                      |
| Rated current             | ≤100 A                                  |
| Contact resistance        | ≤0.3 mΩ                                 |
| Stripping length          | 19 mm                                   |
| Limiting temperature      | -40 ... +125 °C                         |
| Mating cycles             | ≥10,000                                 |
| Note on the mating cycles | Mating cycles with other HMC components |

### Material properties

|                     |                 |
|---------------------|-----------------|
| Material (contacts) | Copper alloy    |
| Surface (contacts)  | HMC gold plated |



Pushing Performance  
Since 1945

Specifications and approvals

|                |             |
|----------------|-------------|
| Specifications | IEC 60664-1 |
|                | IEC 61984   |

Commercial data

|                                |                                            |
|--------------------------------|--------------------------------------------|
| Packaging size                 | 10                                         |
| Net weight                     | 17.8 g                                     |
| Country of origin              | Germany                                    |
| European customs tariff number | 85366990                                   |
| GTIN                           | 5713140188259                              |
| ETIM                           | EC000796                                   |
| eCl@ss                         | 27440204 Contact for industrial connectors |