

## Han PE-module male axial 16-35qmm

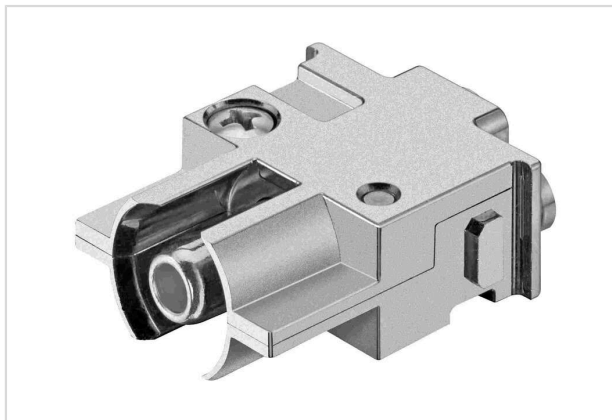


Image is for illustration purposes only. Please refer to product description.

Part number	09 14 001 2633
Specification	Han PE-module male axial 16-35qmm
HARTING eCatalogue	<a href="https://harting.com/09140012633">https://harting.com/09140012633</a>

### Identification

Category	Modules
Series	Han-Modular®
Type of module	Han® PE module
Size of the module	Single module

### Version

Termination method	Axial screw termination
Gender	Male
Number of contacts	1
Pack contents	PE module with pre-assembled axial screw contact

### Technical characteristics

Conductor cross-section	16 ... 35 mm <sup>2</sup>
Wire outer diameter	≤14.5 mm
Contact resistance	≤0.3 mΩ
Stripping length	13 mm
Tightening torque	2 Nm 6 ... 8 Nm for axial screw
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500

### Material properties

Material (insert)	Zinc die-cast, nickel-plated
-------------------	------------------------------



**Pushing Performance**  
Since 1945

## Material properties

Material (contacts)	Copper alloy
Surface (contacts)	Silver plated
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	Lead
ECHA SCIP number	5dbb3851-b94e-4e88-97a1-571845975242
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead Nickel

## Specifications and approvals

Specifications	IEC 61984
UL / CSA	UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076

## Commercial data

Packaging size	1
Net weight	76 g
Country of origin	Germany
European customs tariff number	85389099
GTIN	5713140162501
ETIM	EC000438
eCI@ss	27440217 Module for industrial connectors (power/signals)