



Pushing Performance  
Since 1945

# Han 300A module short, female

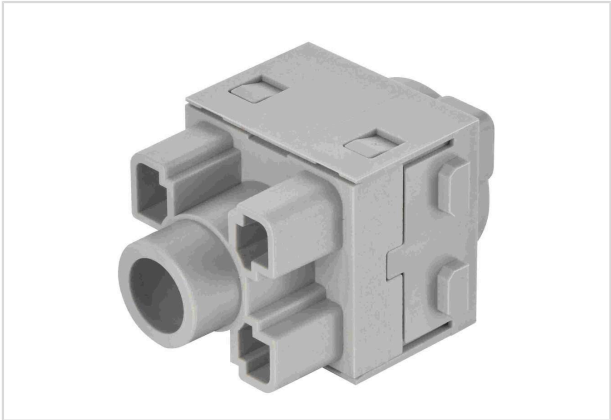


Image is for illustration purposes only. Please refer to product description.

|                    |   |
|--------------------|---|
| Part number        | 09 14 001 3105  |
| Specification      | Han 300A module short, female   |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09140013105">https://b2b.harting.com/09140013105</a> |

## Identification

|                    |                               |
|--------------------|-------------------------------|
| Category           | Modules                       |
| Series             | Han-Modular®                  |
| Type of module     | Han® 300 A module, for busbar |
| Size of the module | Double module                 |

## Version

|                    |                                   |
|--------------------|-----------------------------------|
| Termination method | Screw termination                 |
| Gender             | Female                            |
| Number of contacts | 1                                 |
| Details            | Please order contacts separately. |

## Technical characteristics

|                       |                          |
|-----------------------|--------------------------|
| Rated current         | 300 A                    |
| Rated voltage         | 1,000 V                  |
| Rated voltage         | 1,000 V AC<br>1,300 V DC |
| Rated impulse voltage | 8 kV                     |
| Pollution degree      | 3                        |
| Insulation resistance | >10 <sup>10</sup> Ω      |
| Limiting temperature  | -40 ... +125 °C          |
| Mating cycles         | ≥500                     |



**Pushing Performance**  
Since 1945

## Material properties

|   |                        |
|---|------------------------|
| Material (insert)                         | Polycarbonate (PC)     |
| Colour (insert)                           | RAL 7032 (pebble grey) |
| Material flammability class acc. to UL 94 | V-0                    |
| RoHS                                      | compliant              |
| ELV status                                | compliant              |
| China RoHS                                | e                      |
| REACH Annex XVII substances               | Not contained          |
| REACH ANNEX XIV substances                | Not contained          |
| REACH SVHC substances                     | Not contained          |
| California Proposition 65 substances      | Not contained          |
| Fire protection on railway vehicles       | EN 45545-2 (2020-08)   |
| Requirement set with Hazard Levels        | R22 (HL 1-3)           |
|   | R23 (HL 1-3)           |

## Specifications and approvals

|                |             |
|----------------|-------------|
| Specifications | EN 50124-1  |
|                | IEC 60664-1 |
|                | IEC 61984   |

## Commercial data

|                                |   |
|--------------------------------|---|
| Packaging size                 | 1   |
| Net weight                     | 19 g  |
| Country of origin              | Romania   |
| European customs tariff number | 85389099  |
| GTIN                           | 5713140184480   |
| ETIM                           | EC000438  |
| eCl@ss                         | 27440217 Module for industrial connectors (power/signals) |