

## Han hinged frame plus, for 2 modules a-b

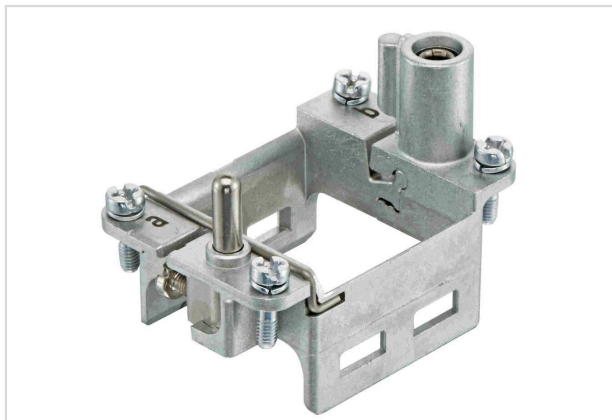


Image is for illustration purposes only. Please refer to product description.

Part number	09 14 006 0371
Specification	Han hinged frame plus, for 2 modules a-b
HARTING eCatalogue	<a href="https://b2b.harting.com/09140060371">https://b2b.harting.com/09140060371</a>

### Identification

Category	Accessories
Series	Han-Modular®
Type of accessory	Hinged frame plus
Description of the accessory	for 2 modules a ... b

### Version

Size	6 B
------	-----

### Technical characteristics

Conductor cross-section	1 ... 10 mm² PE (power side) 0.5 ... 2.5 mm² PE (signal side) The use of ferrules is recommended, conductor cross-section 10 mm² only with ferrule crimping tool 09 99 000 0374.
Stripping length	8 ... 10 mm
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500

### Material properties

Material	Zinc die-cast Stainless steel
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50



**Pushing Performance**  
Since 1945

## Material properties

REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	Lead
ECHA SCIP number	564b7d75-7bf6-4cfb-acb1-2168eb61b675
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead

## Specifications and approvals

Specifications	IEC 60664-1 IEC 61984
UL / CSA	UL 1977 ECBT2.E235076
Approvals	DNV GL

## Commercial data

Packaging size	1
Net weight	5.6 g
Country of origin	Germany
European customs tariff number	85389099
GTIN	5713140161832
ETIM	EC002312
eCl@ss	27440206 Module carrier frame for industrial connectors