

## Han 4A-SC-M

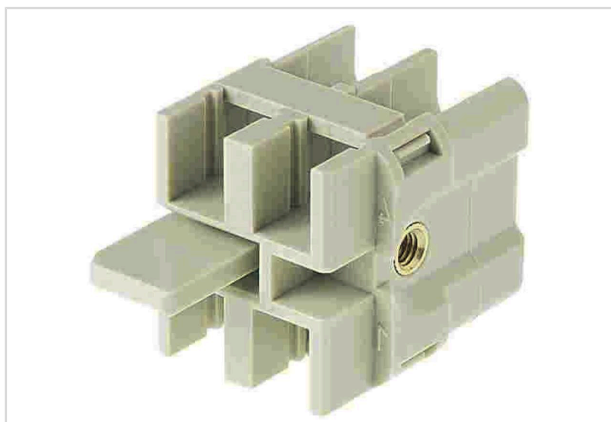


Image is for illustration purposes only. Please refer to product description.

Part number	09 20 004 4701
Specification	Han 4A-SC-M
HARTING eCatalogue	<a href="https://harting.com/09200044701">https://harting.com/09200044701</a>

### Identification

Category	Inserts
Series	Han-Brid <sup>®</sup>
Identification	Han <sup>®</sup> 4 A SC
Description of the contact	for FO

### Version

Gender	Male
Size	3 A
Number of contacts	4
Details	Please order contacts separately.

### Technical characteristics

Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +85 °C
Mating cycles	$\geq 500$

### Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption



**Pushing Performance**  
Since 1945

## Material properties

China RoHS	50
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	Lead
ECHA SCIP number	5dbb3851-b94e-4e88-97a1-571845975242
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead Nickel
Fire protection on railway vehicles	EN 45545-2 (2020-08)
Requirement set with Hazard Levels	R22 (HL 1-3) R23 (HL 1-3)

## Commercial data

Packaging size	2
Net weight	6.08 g
Country of origin	Germany
European customs tariff number	85366990
GTIN	5713140039131
ETIM	EC000438
eCl@ss	27440205 Contact insert for industrial connectors