

U | Contact

Data sheet

Mounting flange left for type 07, 08

Page 1/4

P/N
710085


2023/06/23

Version: Q

Illustrations



Dimensional drawing

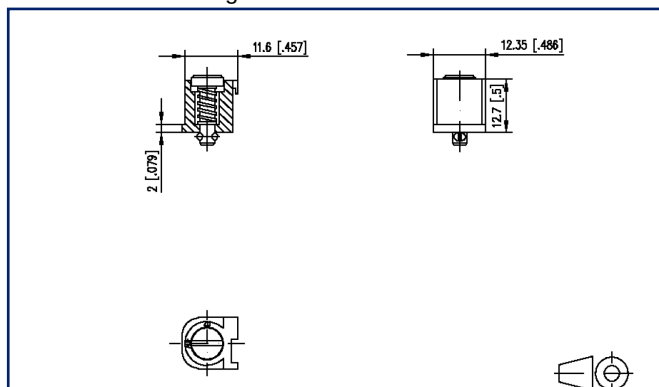

See enlarged drawings at the end of document

Product specification

- The latching flanges are attached to the side of the terminal block and secured to the printed circuit board with a quarter turn of the screw
- Latching flanges for left and right side are necessary for mounting.
- Variants: 710084 right, 710085 left



U | Contact

Data sheet

Page 2/4

Mounting flange left for type 07, 08

P/N
710085

2023/06/23

Version: Q

Technical Data

Material	
insulating material	PA66
spring material	Spring steel
screw material	CuZn
screw surface	Ni
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13



U | Contact

Data sheet

Page 3/4

Mounting flange left for type 07, 08

P/N
710085

2023/06/23

Version: Q

Accessories from

P/N	Designation
310071	RP025xxIBWC Type 007
310072	RP029xxIBWC Type 007
311071	RP025xxHBWC Type 107
311072	RP029xxHBWC Typ 107
311081	RP025xxMBWC Typ 108
311082	RP029xxMBWC Typ 108

U | Contact

Data sheet

Mounting flange left for type 07, 08

Page 4/4

P/N
710085

2023/06/23

Version: Q

Illustrations

Dimensional drawing

