



The Smarter Solution

UL cUL US CE DFE A CQC CB RoHS ISO14001 OHSAS18001 SGS ISO9001:2008



2024 Catalog

**Printed Circuit Board
Terminal Blocks**



2024 PCB BLOCK CATALOG

Proven Connectivity Quality: Over 70-year's supplying major global brands with private labeled product. RNA products will conform to CE, CSA, UL certifications and many other Certs as need by customers. Our facilities are ISO9001/ISO14001 certified; follows OHSAS18001/RoHS.

Broad Standard Product Offering: Large selection of, PCB, DIN Rail Mount, and Barrier Terminal Blocks that will cross to many of the major brands.

Value Strategy: Our customers enjoy RNA's High-Quality products, Super Competitive pricing, Quick delivery, US based Sales technical support and National and Regional Distribution.

Custom Solutions: RNA has unsurpassed in-house capabilities for product engineering with in-house testing lab, 110+ engineers, 90+ molding staff to provides customers with quick turn around on custom product designs or, standard product modifications.

Deep Technical Expertise: RNA has extensive experience and knowledge with Terminal Block Technologies and provides the needed engineering and sales support for our sales reps, distributors, and customers.

RNA strives to provides our customers with **QUALITY PRODUCTS, BETTER PRICING, BETTER DELIVERY, and BETTER SUPPORT** than all our competitors.


Full line catalogue links available online at: www.reliancenorthamerica.com

www.RelianceNorthAmerica.com

Terminal Block Professional Manufacturer




PRODUCT CONTENTS

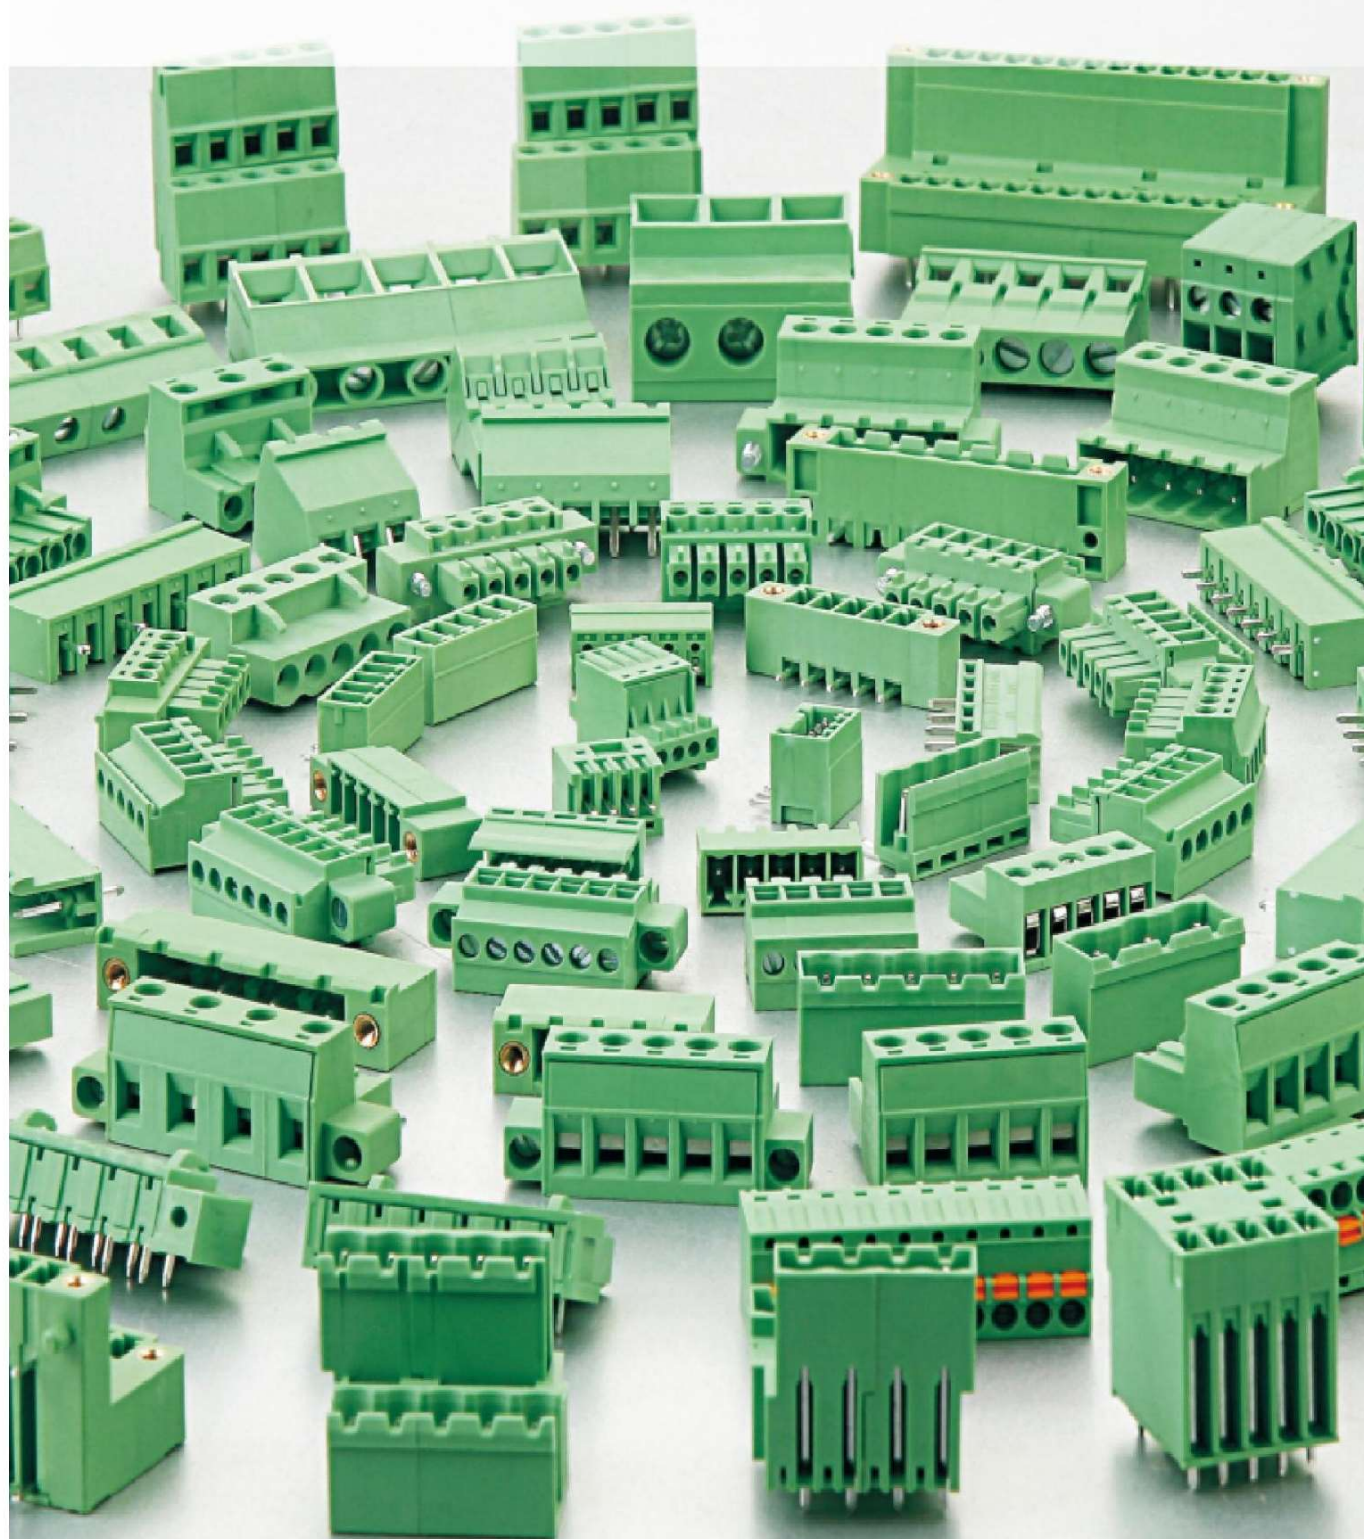



PCB SCREW TERMINAL BLOCK

HOW TO ORDER:



0	No definition
1	Single pitch
2	Double pitch

Color


10	Grey	40	Green	70	Transp.
20	Blue	50	Orange	80	Yellow
30	Black	60	Red	90	White

P013-034



PLUG-IN TERMINAL BLOCK

HOW TO ORDER:



0	No definition
1	Single pitch
2	Double pitch

Color


10	Grey	40	Green	70	Transp.
20	Blue	50	Orange	80	Yellow
30	Black	60	Red	90	White

P035-086



PCB SPRING TERMINAL BLOCK

HOW TO ORDER:

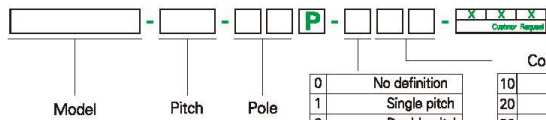


0	No definition
1	Single pitch
2	Double pitch

Color


10	Grey	40	Green	70	Transp.
20	Blue	50	Orange	80	Yellow
30	Black	60	Red	90	White

P087-092

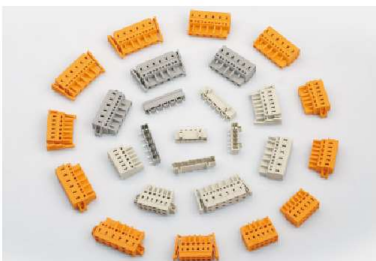

MCS TERMINAL BLOCK

HOW TO ORDER:



0	No definition
1	Single pitch
2	Double pitch

Color


10	Grey	40	Green	70	Transp.
20	Blue	50	Orange	80	Yellow
30	Black	60	Red	90	White

P093-112



FEED THROUGH TERMINAL BLOCK

HOW TO ORDER:



0	No definition
1	Single pitch
2	Double pitch

Color


10	Grey	40	Green	70	Transp.
20	Blue	50	Orange	80	Yellow
30	Black	60	Red	90	White

P113-117



BARRIER TERMINAL BLOCK

HOW TO ORDER:



0	No definition
1	Single pitch
2	Double pitch

Color


10	Grey	40	Green	70	Transp.
20	Blue	50	Orange	80	Yellow
30	Black	60	Red	90	White

P118-158



PCB SCREW TERMINAL BLOCK

PCB universal screw terminal blocks, this typical feature of the screw connection system is characterized by the easy connection and extremely high contact strengths. Provide the wire size from 0.08mm² to 10mm², Available with different pitches from 2.54mm to 15.0mm. The product is designed in accordance with IEC 60998, UL1059, CSA C22.2 NO.158 standards.

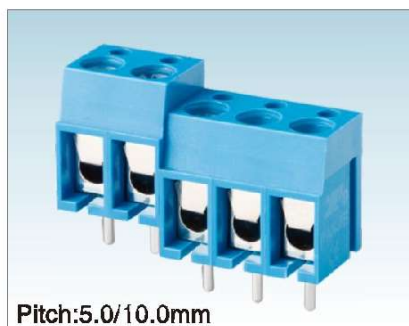

Pitch:5.0/10.0mm

MODEL: WJ300


CERTIFICATION	UL
---------------	----



Pitch:5.0/10.0mm

MODEL: WJ300R

CERTIFICATION	UL
---------------	----

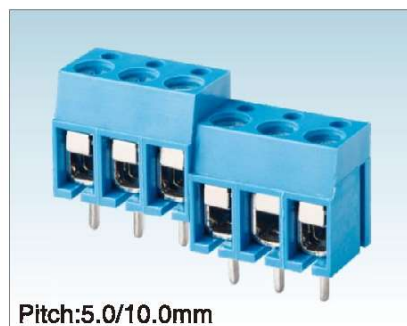


Pitch:5.0/10.0mm


MODEL: WJ305

CERTIFICATION	UL
---------------	----


MATERIAL		
Screws	M3.0 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	250V	250V
Rated current	16A	17.5A
Wire range	22-14AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	4.5-5mm	

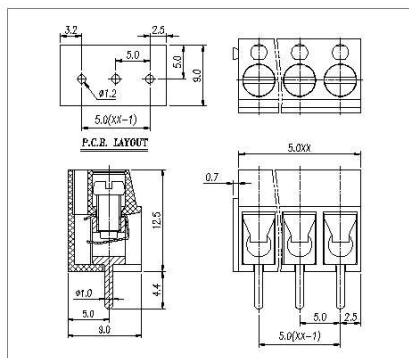

MATERIAL		
Screws	M3.0 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	250V	250V
Rated current	16A	17.5A
Wire range	22-14AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43lbin	
Strip length	4.5-5mm	

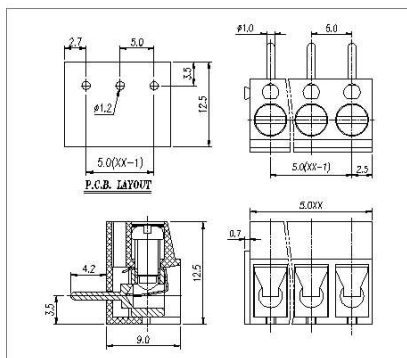

MATERIAL		
Screws	M2.5 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	250V	250V
Rated current	16A	17.5A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.6Lbin	
Strip length	4.5-5mm	

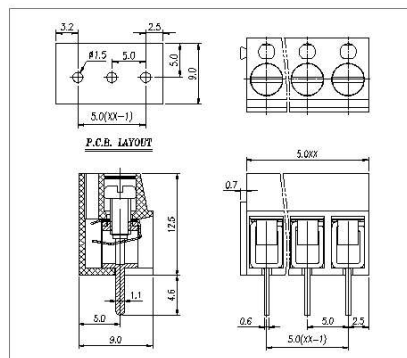

PCB SCREW TERMINAL BLOCK



Pitch: 7.5/15.0mm

MODEL: WJ370

CERTIFICATION



Pitch: 7.5/15.0mm

MODEL: WJ375

CERTIFICATION



Pitch: 5.0/10.0mm

MODEL: WJ301




CERTIFICATION




MATERIAL		
Screws	M3.0 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	250V	450V
Rated current	16A	24A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	4.5-6mm	

MATERIAL		
Screws	M3.0 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	250V	450V
Rated current	16A	24A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	4.5-6mm	

MATERIAL		
Screws	M2.5 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	250V	250V
Rated current	16A	17.5A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	4.5-6mm	




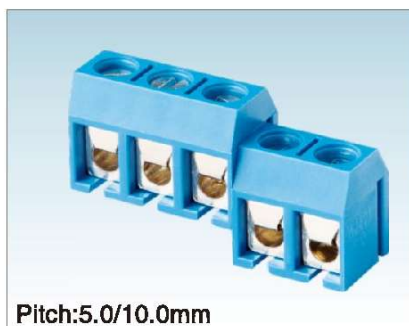

Pitch:5.0/10.0mm

MODEL: WJ301R

CERTIFICATION	.R.
---------------	------------

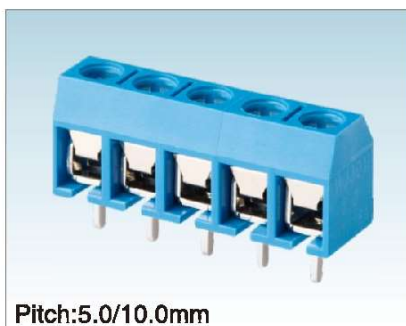

Pitch:5.0/10.0mm

MODEL: WJ306

CERTIFICATION	.R.
---------------	------------



Pitch:5.0/10.0mm




MODEL: WJ332K

CERTIFICATION	.R.
---------------	------------


MATERIAL		
Screws	M2.5 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	250V	250V
Rated current	16A	17.5A
Wire range	22-14AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	4.5-5mm	

MATERIAL		
Screws	M2.5 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	250V	250V
Rated current	16A	17.5A
Wire range	22-14AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	4.5-5mm	

MATERIAL		
Screws	M2.5 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	17.5A
Wire range	28-18AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	4.5-5mm	

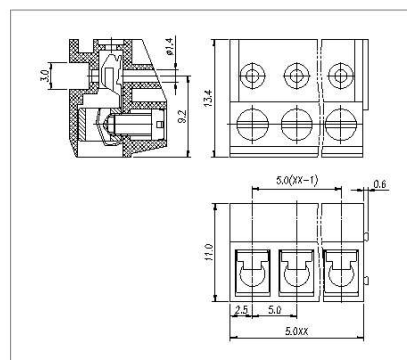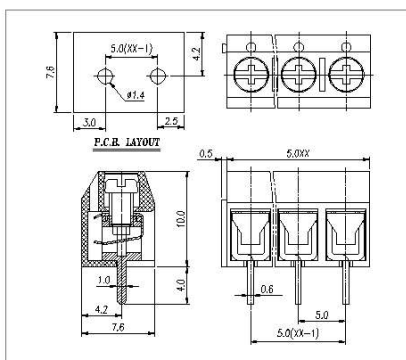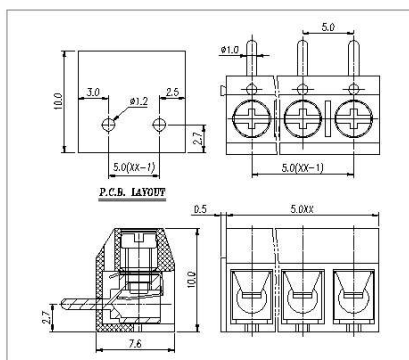


PCB SCREW TERMINAL BLOCK



IEC
250V
10A
1.0mm²

-40°C~+105°C
+250°C for 5 Sec
2.04kgf-cm/0.2Nm/1.77Lbin
4.5-5mm

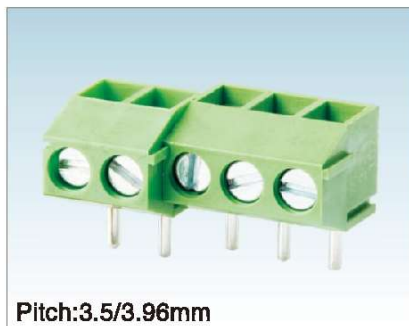

Pitch:3.5/3.96mm

MODEL: WJ350R,WJ396R

CERTIFICATION	.R.
---------------	------------



Pitch:3.5mm

MODEL: WJ350C

CERTIFICATION	CE
---------------	-----------




Pitch:5.0/10.0mm


MODEL: WJ126

CERTIFICATION	.R.
---------------	------------


MATERIAL		
Screws	M2.0 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	10A
Wire range	24-18AWG	1.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	4.5-5mm	

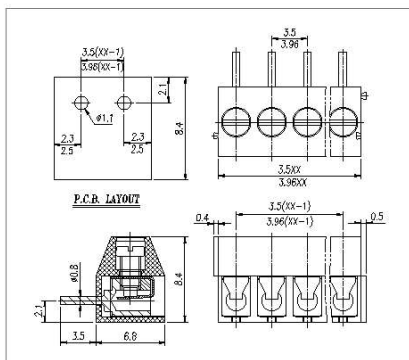

MATERIAL		
Screws	M2.5 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	130V
Rated current	10A	10A
Wire range	24-18AWG	1.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	4.5-5mm	

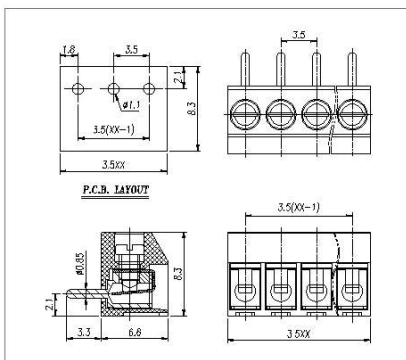

MATERIAL		
Screws	M2.5 Steel Zn plated	
Shrapnel	Stainless steel	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	18A
Wire range	26-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

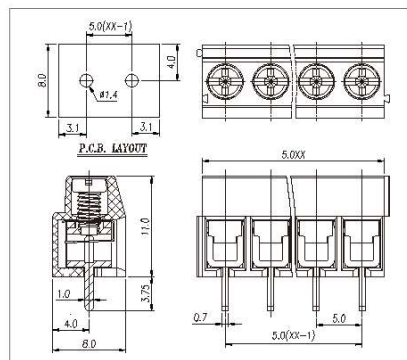

PCB SCREW TERMINAL BLOCK



Pitch:5.0/10.0mm

MODEL: WJ126R


CERTIFICATION



Pitch:5.0/10.0mm

MODEL: WJ166

CERTIFICATION




Pitch:5.0/10.0mm


MODEL: WJ167

CERTIFICATION


MATERIAL		
Screws	M2.5 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	18A
Wire range	26-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

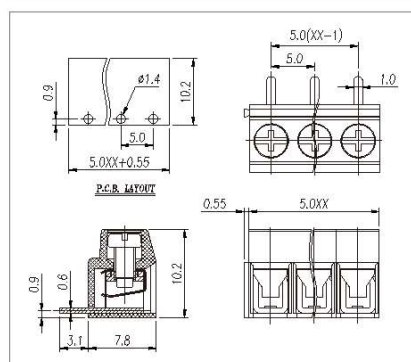

MATERIAL		
Screws	M3 Steel Zn plated	
Shrapnel	Stainless steel	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	24A
Wire range	26-4AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	6-7mm	

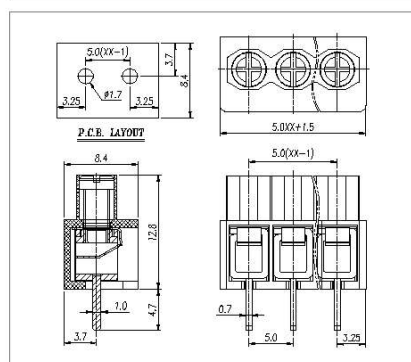

MATERIAL		
Screws	M2.5 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	24A
Wire range	26-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

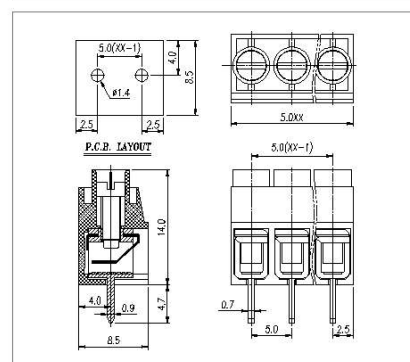

Pitch:5.0/10.0mm

MODEL: WJ167R

CERTIFICATION

Pitch:5.0/10.0mm

MODEL: WJ103

CERTIFICATION




Pitch:5.0/10.0mm


MODEL: WJ121

CERTIFICATION


MATERIAL		
Screws	M2.5 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	260V
Rated current	15A	24A
Wire range	26-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

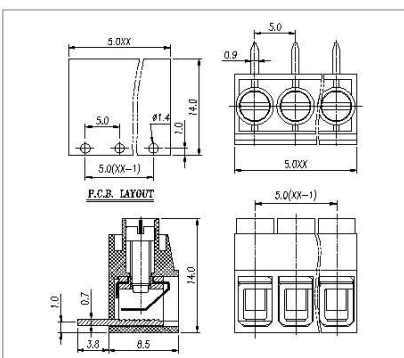

MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	260V
Rated current	16A	24A
Wire range	24-12AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

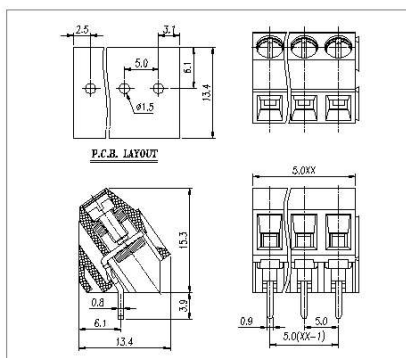

MATERIAL		
Screws	M3.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	260V
Rated current	10A	24A
Wire range	24-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	6.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	6-7mm	

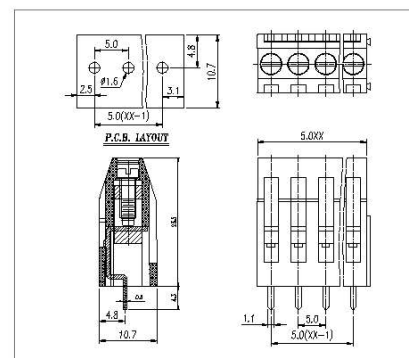

PCB SCREW TERMINAL BLOCK



Pitch:5.0/10.0mm

MODEL: WJ122

CERTIFICATION



Pitch:5.0/5.08/10.0mm

MODEL: WJ127

CERTIFICATION



Pitch:5.0mm

MODEL: WJ128-5.0




CERTIFICATION




MATERIAL		
Screws	M3.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	24A
Wire range	24-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	6-7mm	

MATERIAL		
Screws	M2.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	12A	16A
Wire range	26-14AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	Pa66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	16A	20A
Wire range	22-12AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~-105℃	
Max. soldering	+250℃ 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

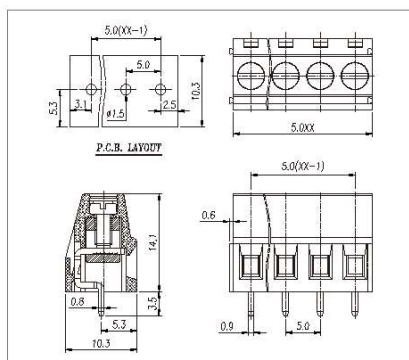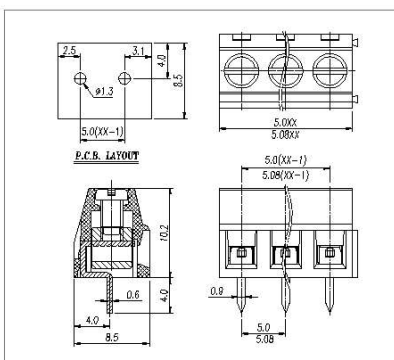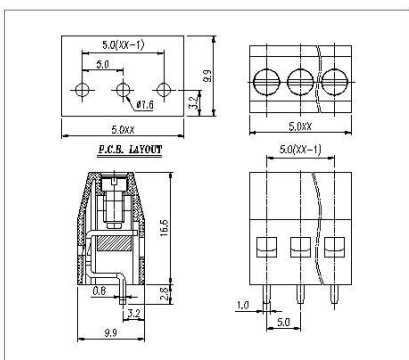

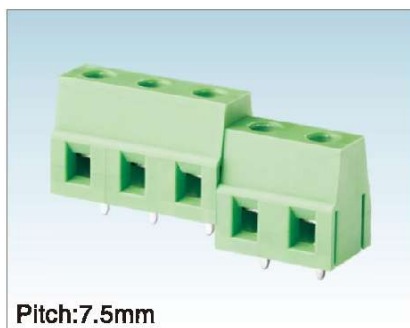

Pitch:7.5mm

MODEL: WJ128-7.5


CERTIFICATION	 
---------------	---



Pitch:5.0mm

MODEL: WJ128R-5.0

CERTIFICATION	 
---------------	---

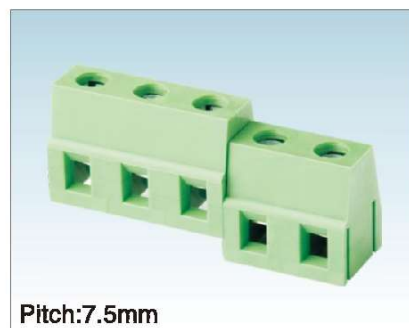


Pitch:7.5mm


MODEL: WJ128R-7.5

CERTIFICATION	 
---------------	---


MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	16A	20A
Wire range	22-12AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

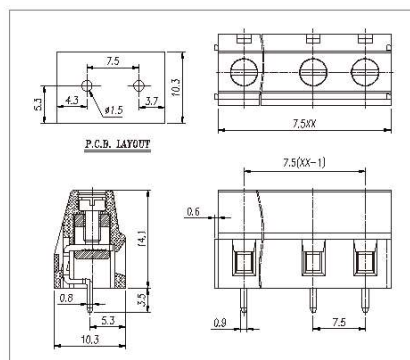


MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	16A	20A
Wire range	22-12AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

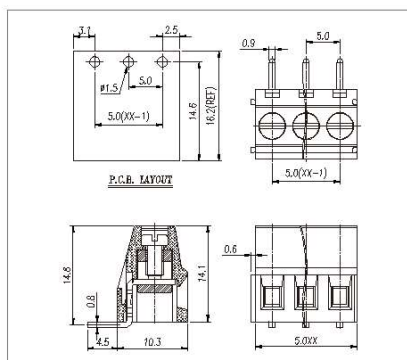

MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	16A	20A
Wire range	22-12AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

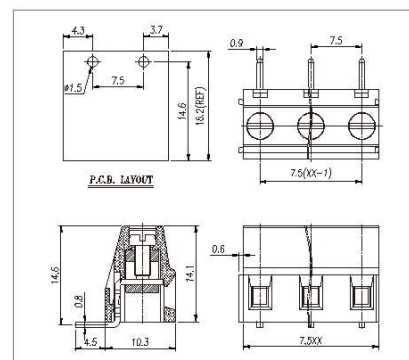

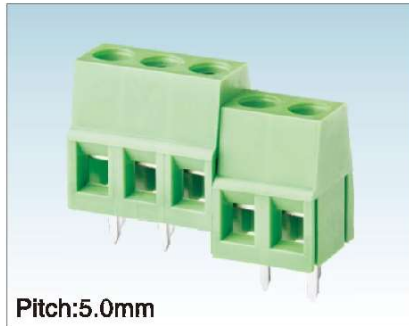

Pitch:5.0mm

MODEL: WJ128E-5.0


CERTIFICATION



Pitch:7.5mm

MODEL: WJ128E-7.5

CERTIFICATION

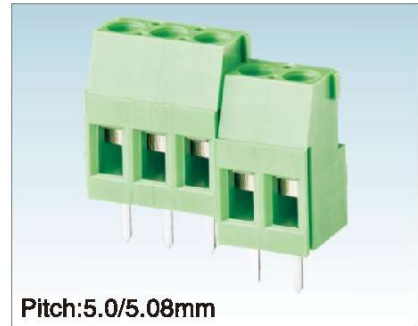

Pitch:5.0/5.08mm

MODEL: WJ129-5.0/5.08




CERTIFICATION




MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	16A	20A
Wire range	22-12AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	16A	20A
Wire range	22-12AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

MATERIAL		
Screws	M3.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	20A	20A
Wire range	26-12AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	8-7mm	

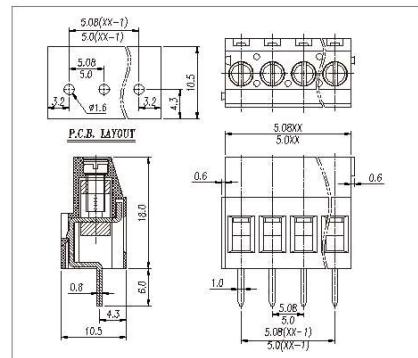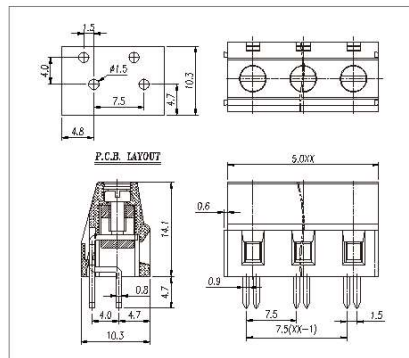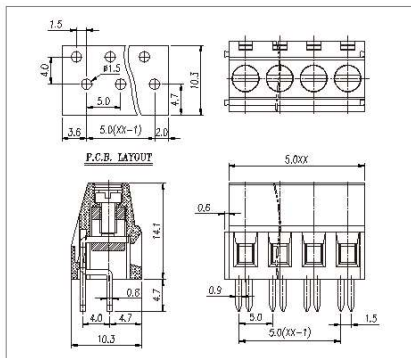

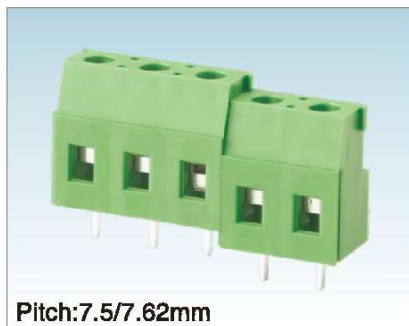

Pitch:7.5/7.62mm

MODEL: WJ129-7.5/7.62

CERTIFICATION	
---------------	--



Pitch:5.0/5.08mm

MODEL: WJ129R-5.0/5.08

CERTIFICATION	
---------------	--



Pitch:7.5/7.62mm




MODEL: WJ129R-7.5/7.62

CERTIFICATION	
---------------	--

MATERIAL		
Screws	M3.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	20A	20A
Wire range	26-12AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	6-7mm	

MATERIAL		
Screws	M3.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	20A	20A
Wire range	26-12AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	6-7mm	

MATERIAL		
Screws	M3.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	20A	20A
Wire range	26-12AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	6-7mm	

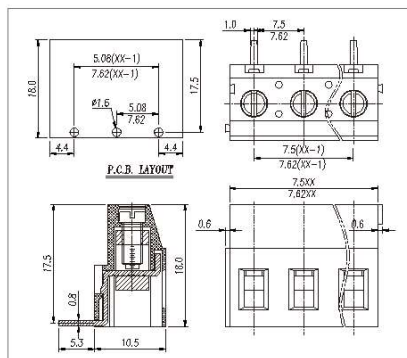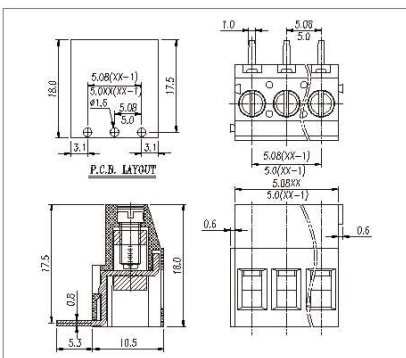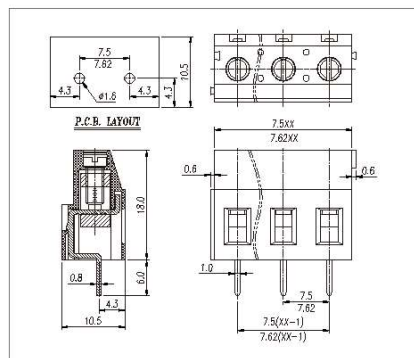



Pitch: 6.35mm

MODEL: WJ635

CERTIFICATION



Pitch: 6.35mm

MODEL: WJ636

CERTIFICATION




Pitch: 7.5mm


MODEL: WJ750

CERTIFICATION


MATERIAL		
Screws	M3.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	30A	32A
Wire range	26-10AWG	4.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	6-7mm	

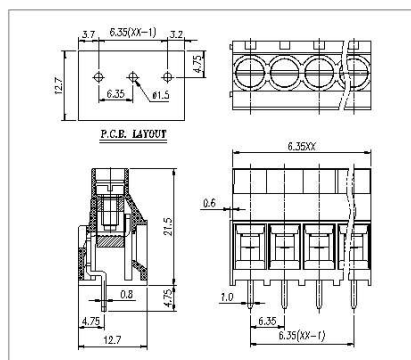

MATERIAL		
Screws	M3.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	30A	32A
Wire range	26-10AWG	4.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	6-7mm	

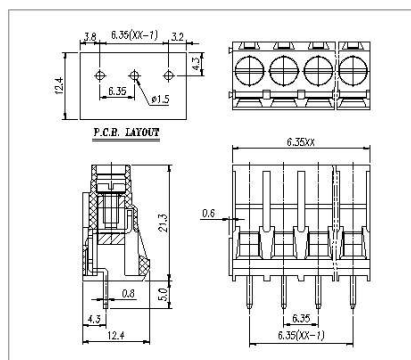

MATERIAL		
Screws	M3.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	30A	32A
Wire range	26-10AWG	4.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	6-7mm	

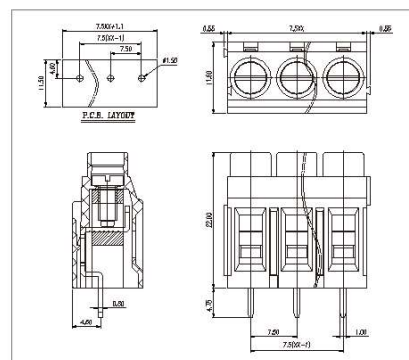



Pitch:9.5mm

MODEL: WJ950

CERTIFICATION	.R.
---------------	------------



Pitch:10.16mm

MODEL: WJ116V

CERTIFICATION	.R.
---------------	------------




Pitch:12.7mm


MODEL: WJ117

CERTIFICATION	
---------------	--


MATERIAL		
Screws	M3.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	30A	32A
Wire range	26-10AWG	4.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/D/C500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	6-7mm	

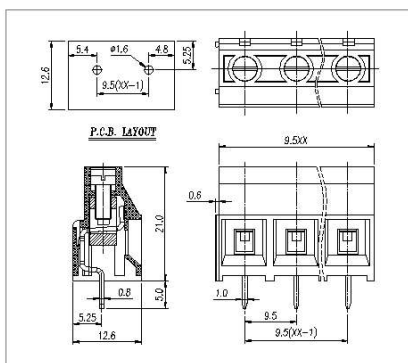

MATERIAL		
Screws	M4.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	62A	57A
Wire range	26-6AWG	10.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	12.24kgf-cm/1.2Nm/10.53Lbin	
Strip length	10-11mm	

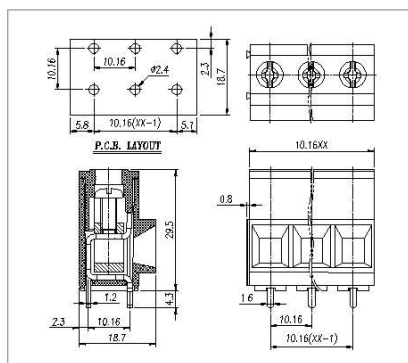

MATERIAL		
Screws	M4.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	600V	1000V
Rated current	60A	57A
Wire range	20-6AWG	10.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2500V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	12.24kgf-cm/1.2Nm/10.53Lbin	
Strip length	10-11mm	

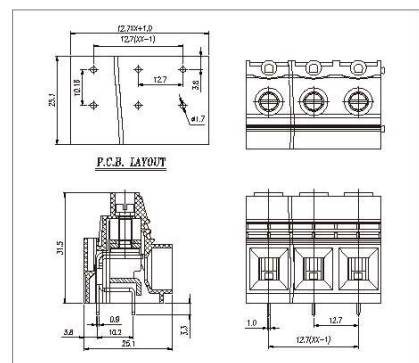



Pitch: 10.16mm

MODEL: WJ116VW

CERTIFICATION



Pitch: 10.16/12.7mm

MODEL: WJ116VK

CERTIFICATION




Pitch: 5.0/10.0mm

MODEL: WJ330


CERTIFICATION




MATERIAL		
Screws	M4.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	600V	1000V
Rated current	60A	67A
Wire range	20-6AWG	10mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2500V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	12.24kgf-cm/1.2Nm/10.53Lbin	
Strip length	10-11mm	




MATERIAL		
Screws	M4.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	1000V
Rated current	60A	67A
Wire range	20-6AWG	10mm²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/D/C500V	
Withstanding voltage	AC2500V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	12.24kgf-cm/1.2Nm/10.53Lbin	
Strip length	10-11mm	

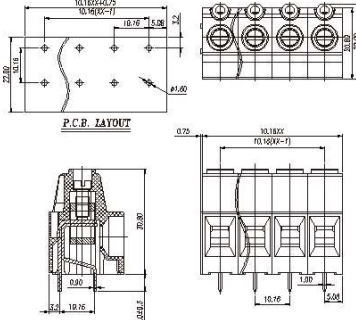

MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

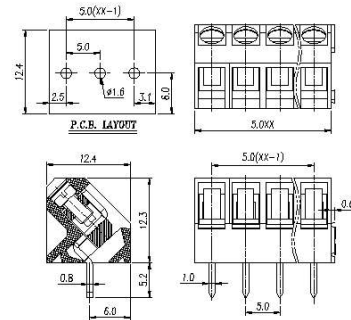

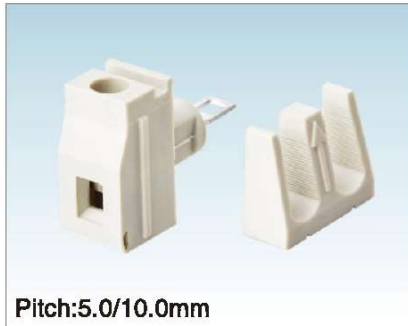

Pitch:5.0/10.0mm

MODEL: WJ410


CERTIFICATION



Pitch:5.0/10.0mm

MODEL: WJ1010

CERTIFICATION

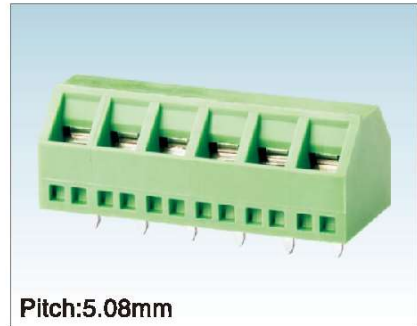


Pitch:5.08mm


MODEL: XD508

CERTIFICATION


MATERIAL		
Screws	M3.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	16A	24A
Wire range	26-12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7-8mm	

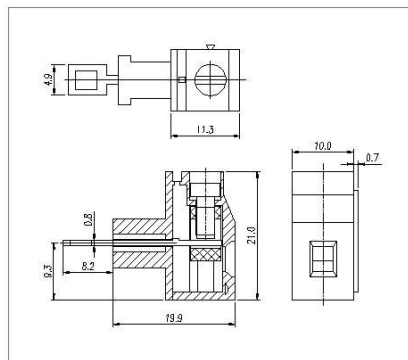

MATERIAL		
Screws	M4.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	30A	41A
Wire range	26-10AWG	6.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC3000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	12.24kgf-cm/1.2Nm/10.53Lbin	
Strip length	7-8mm	

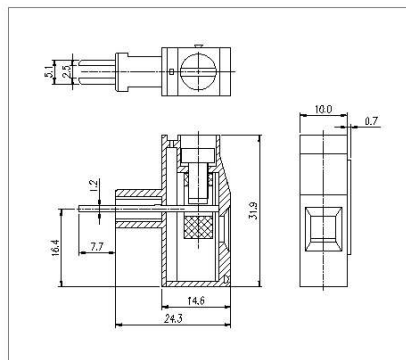

MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	17.5A
Wire range	26-14AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/D.C500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

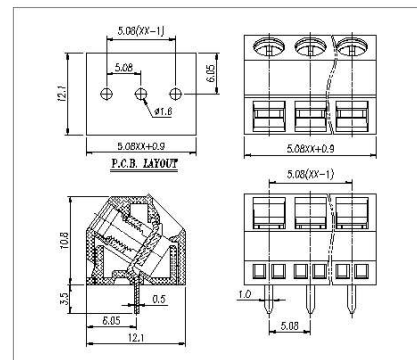




Pitch: 5.0/10.0mm

MODEL: WJA500

CERTIFICATION



Pitch: 3.5/3.81mm

MODEL: WJEK350/381

CERTIFICATION



Pitch: 3.5/3.81mm

MODEL: WJEEK350/381




CERTIFICATION




MATERIAL	
Screws	M2.5 Steel Zn plated
Cage	Brass, Ni plated
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	15A 17.5A
Wire range	26-14AWG 1.5mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C 5 Sec
Torque	4.08kgf-cm/0.4Nm/3.54Lbin
Strip length	6-7mm

MATERIAL	
Screws	M2.0 Steel Zn plated
Cage	Brass, Ni plated
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	10A 13.5A
Wire range	30-16AWG 1.0mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C 5 Sec
Torque	2.04kgf-cm/0.2Nm/1.77Lbin
Strip length	5-6mm

MATERIAL	
Screws	M2.0 Steel Zn plated
Cage	Brass, Ni plated
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	10A 13.5A
Wire range	30-16AWG 1.0mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C 5 Sec
Torque	2.04kgf-cm/0.2Nm/1.77Lbin
Strip length	5-6mm

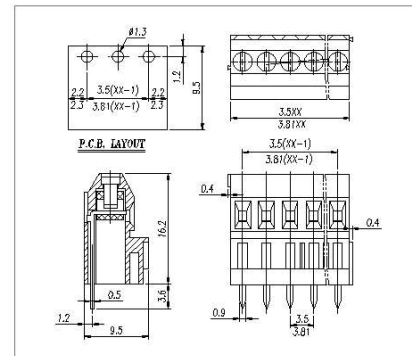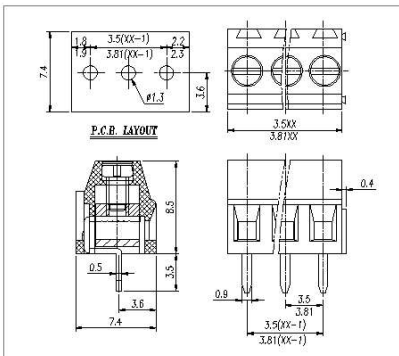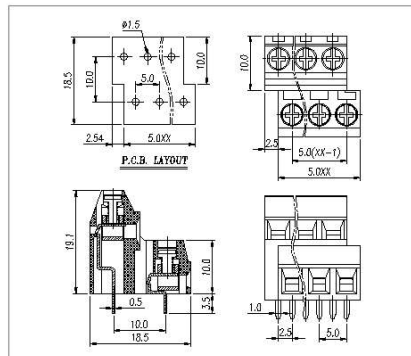

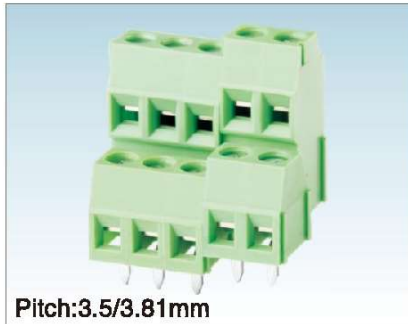

Pitch:3.5/3.81mm

MODEL: WJEK350A/381A


CERTIFICATION	.F.V.
---------------	--------------



Pitch:3.5/3.81mm

MODEL: WJEK350B/381B

CERTIFICATION	.F.V.
---------------	--------------

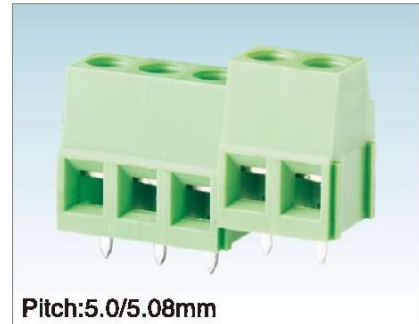

Pitch:5.0/5.08mm




MODEL: WJEK500/508

CERTIFICATION	.F.V.
---------------	--------------

MATERIAL		
Screws	M2.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	13.5A
Wire range	30-16AWG	1.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	5-6mm	

MATERIAL		
Screws	M2.0 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	13.5A
Wire range	30-16AWG	1.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃--+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77lbin	
Strip length	5-6mm	

MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	18A
Wire range	30-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

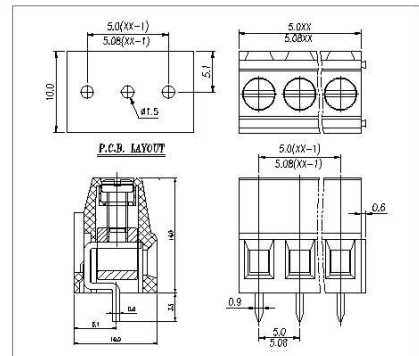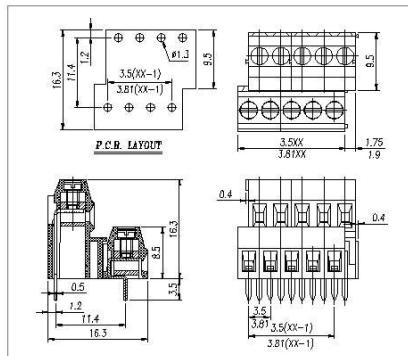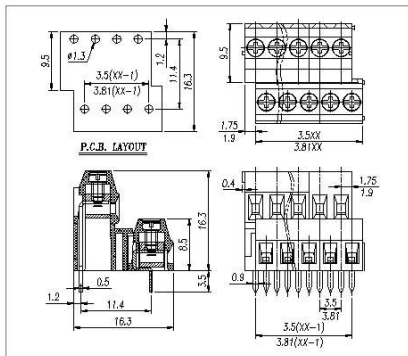



Pitch:5.0/5.08mm



Pitch:5.0/5.08mm

MODEL: WJEK500A/508A

95


CERTIFICATION

94

CERTIFICATION

95

MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	16A	18A
Wire range	30~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54lbf.in	
Strip length	6~7mm	

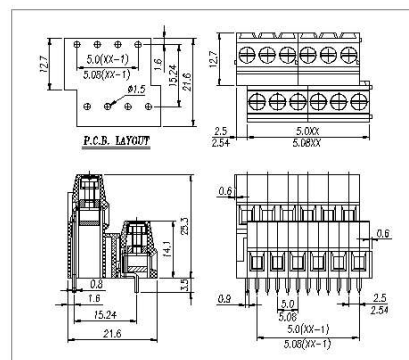



Pitch:5.0/5.08mm

MODEL: WJEK500B/508B

CERTIFICATION	UL
---------------	----



Pitch:5.0/5.08mm

WJE2K500A/WJE2K508A

CERTIFICATION	UL
---------------	----




Pitch:5.0/5.08mm


WJE2K500B/WJE2K508B

CERTIFICATION	UL
---------------	----


MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	18A
Wire range	30-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

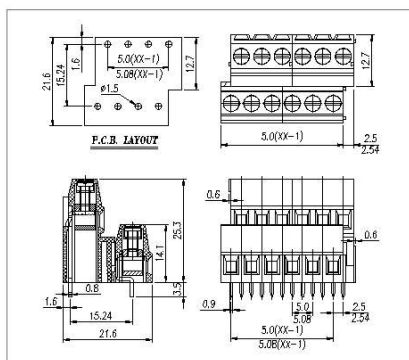

MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	18A
Wire range	30-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃--+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

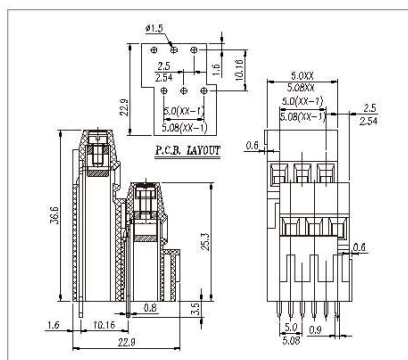

MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	18A
Wire range	30-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

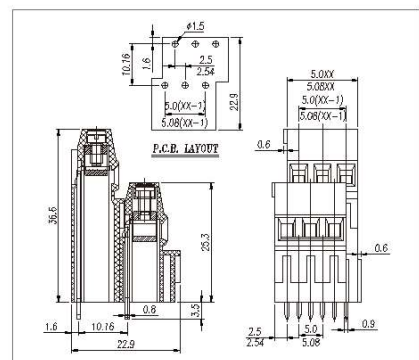



Pitch: 5.0/5.08mm

MODEL: WJE3K500A/508A

CERTIFICATION	
---------------	--



Pitch: 5.0/5.08mm

MODEL: WJE3K500B/508B

CERTIFICATION	
---------------	--




Pitch: 5.0mm


MODEL: WJ105R

CERTIFICATION	
---------------	--


MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	18A
Wire range	30-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

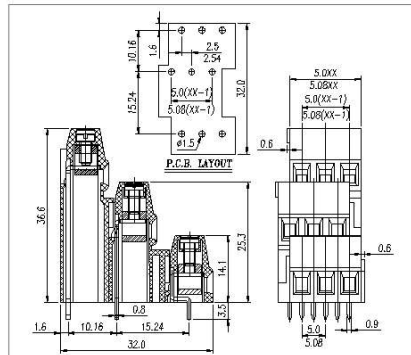

MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Brass, Ni plated	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	18A
Wire range	30-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

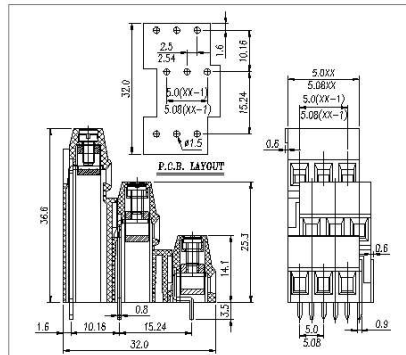

MATERIAL		
Screws	M2.5 Steel Zn plated	
Cage	Steel, Zn plated	
Pin header	Brass, Sn plated	
Slide block	Steel, Zn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	20A	24A
Wire range	24-12AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	12-13mm	

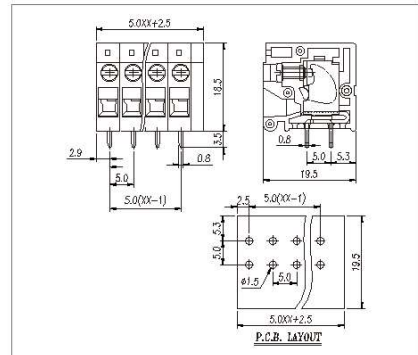



Pitch:5.0mm

MODEL: WJ105V

CERTIFICATION	.UL.
---------------	-------------



Pitch:5.0mm

WJ105RA

CERTIFICATION	.UL.
---------------	-------------



Pitch:5.0mm




WJ105VA


CERTIFICATION	.UL.
---------------	-------------

MATERIAL	
Screws	M2.5 Steel Zn plated
Cage	Steel, Zn plated
Pin header	Brass, Sn plated
Slide block	Steel, Zn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 450V
Rated current	20A 24A
Wire range	24-12AWG 2.5mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C 5 Sec
Torque	4.08kgf-cm/0.4Nm/3.54Lbin
Strip length	12-13mm

MATERIAL	
Screws	M2.5 Steel Zn plated
Cage	Steel, Zn plated
Pin header	Brass, Sn plated
Slide block	Steel, Zn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 450V
Rated current	20A 24A
Wire range	24-12AWG 2.5mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C 5 Sec
Torque	4.08kgf-cm/0.4Nm/3.54Lbin
Strip length	12-13mm

MATERIAL	
Screws	M2.5 Steel Zn plated
Cage	Steel, Zn plated
Pin header	Brass, Sn plated
Slide block	Steel, Zn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 450V
Rated current	20A 24A
Wire range	24-12AWG 2.5mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C 5 Sec
Torque	4.08kgf-cm/0.4Nm/3.54Lbin
Strip length	12-13mm

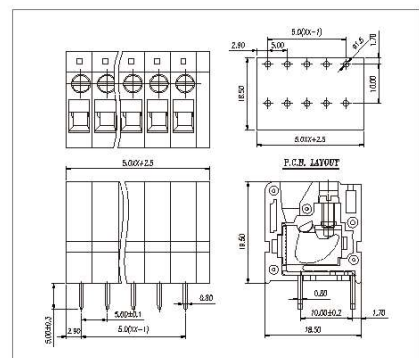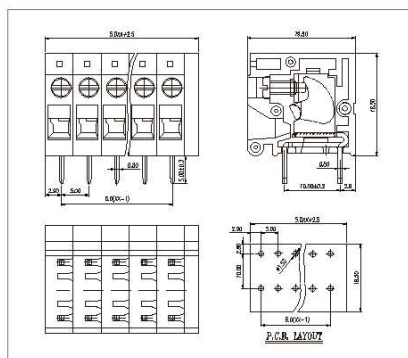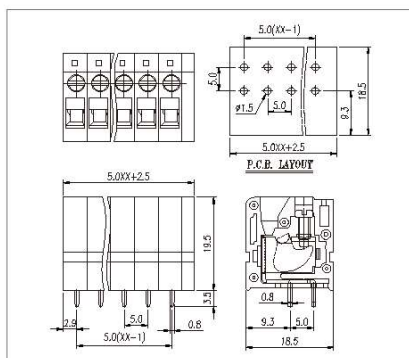

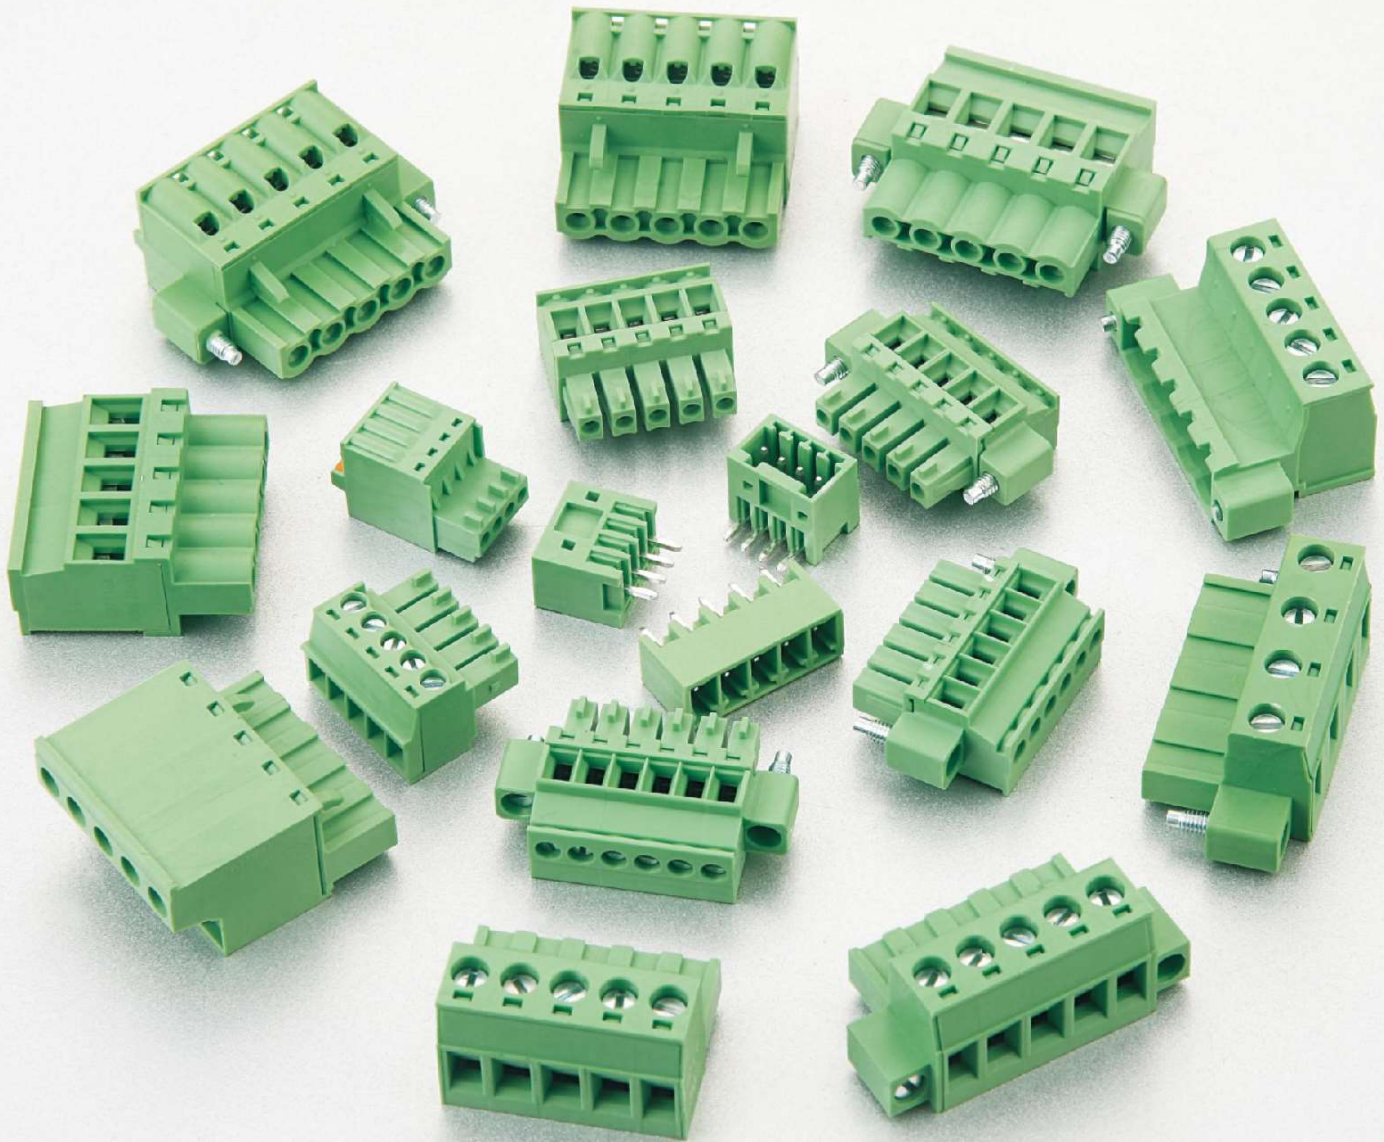

PLUG-IN TERMINAL BLOCK

Plug-in terminal blocks, provide the wire size from 0.08mm² to 10mm². Available with different pitches from 2.54mm to 15.24mm. Choosing insert direction, contact direction, Plug-In direction according to requests. The product is designed in accordance with IEC 60998, UL 1059, CSA C22.2 NO. 158 standards.


www.RelianceNorthAmerica.com



Pitch:2.5mm

MODEL: WJ15EDGKD-2.5

CERTIFICATION	.UL.
---------------	-------------

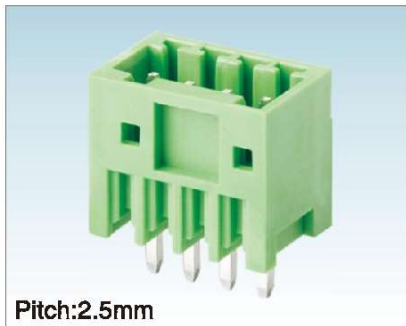

Pitch:2.5mm

MODEL: WJ15EDGVC-2.5

CERTIFICATION	.UL.
---------------	-------------



Pitch:2.5mm




MODEL: WJ15EDGRC-2.5

CERTIFICATION	.UL.
---------------	-------------

MATERIAL		
Clamp	Phosphor bronze, Ni plated	
Shrapnel	Stainless Steel	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	150V	130V
Rated current	5A	6A
Wire range	26~20AWG	0.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC1500V/1Min	
MECHANICAL		
Temp. range	-40℃~+120℃	
Strip length	7~8mm	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	150V	130V
Rated current	5A	6A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC1600V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	150V	130V
Rated current	5A	6A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC1600V/1min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

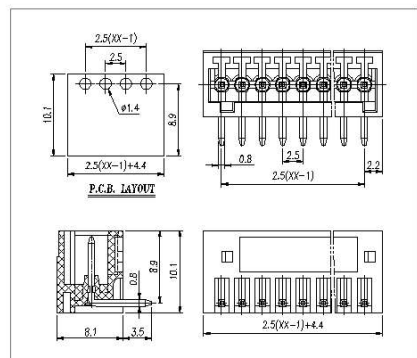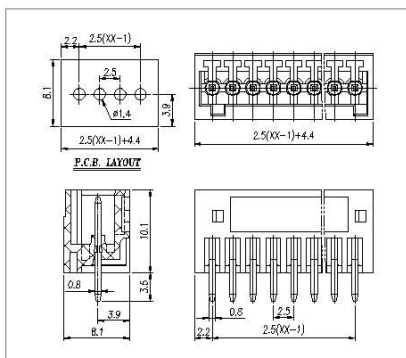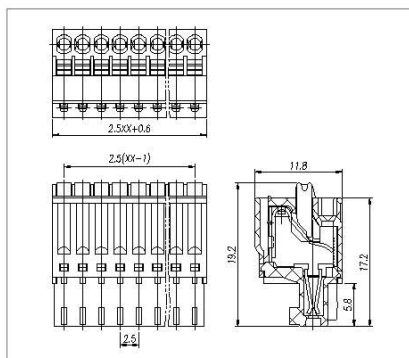

PLUG-IN TERMINAL BLOCK



Pitch:2.5mm

MODEL: WJ15EDGVH-2.5


CERTIFICATION	
---------------	--



Pitch:2.5mm

MODEL: WJ15EDGRH-2.5

CERTIFICATION	
---------------	--

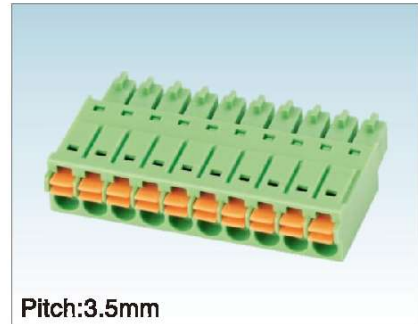

Pitch:3.5mm




MODEL: WJ15EDGKN-3.5


CERTIFICATION	
---------------	--

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	150V	130V
Rated current	5A	6A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/D/C500V	
Withstanding voltage	AC1500V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	150V	130V
Rated current	5A	6A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC1500V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Clamp	Phosphor bronze, Ni plated.	
Shrapnel	Stainless steel	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Wire range	24~16AWG	1.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	9~10mm	

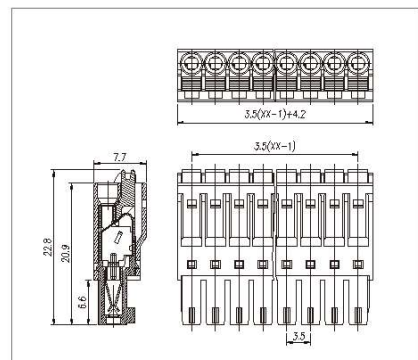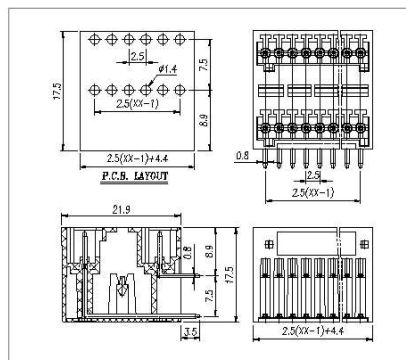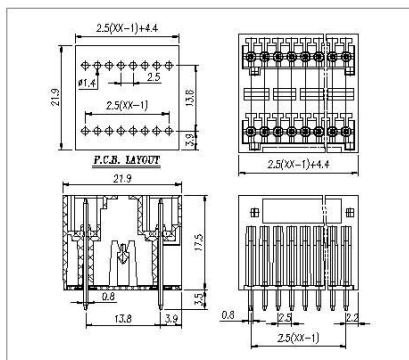


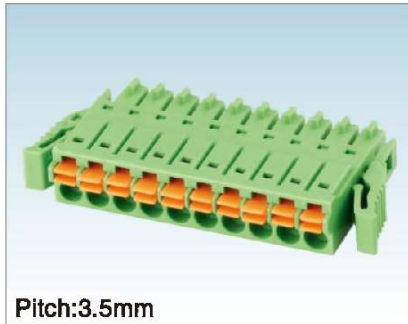

Pitch:3.5mm

MODEL: WJ15EDGKNG-3.5

CERTIFICATION	
---------------	--

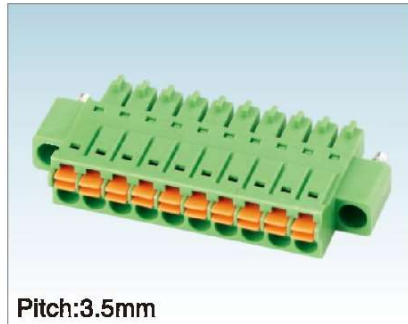

Pitch:3.5mm

MODEL: WJ15EDGKNM-3.5

CERTIFICATION	
---------------	--



Pitch:3.5mm




MODEL: WJ15EDGVHB-THT-3.5

CERTIFICATION	
---------------	--

MATERIAL		
Clamp	Phosphor bronze, Ni plated	
Shrapnel	Stainless steel	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Wire range	24~16AWG	1.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	9~10mm	

MATERIAL		
Clamp	Phosphor bronze, Ni plated	
Shrapnel	Stainless steel	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Wire range	24~16AWG	1.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	9~10mm	

MATERIAL		
Nut	M2.5, Brass	
Pin header	Brass, Sn plated	
Housing	LCP, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+130℃	
Max Soldering	+285℃ for 10 Sec	

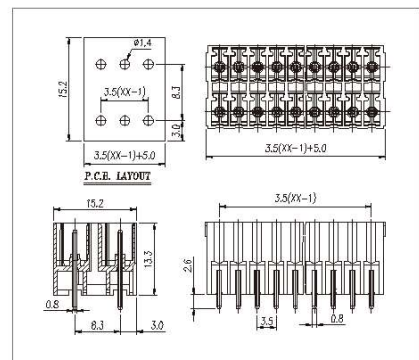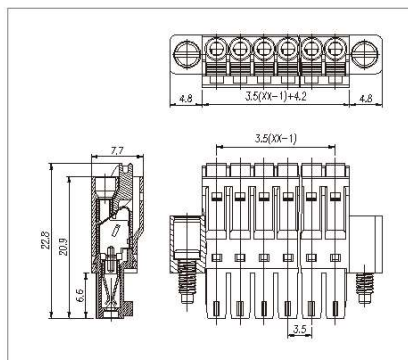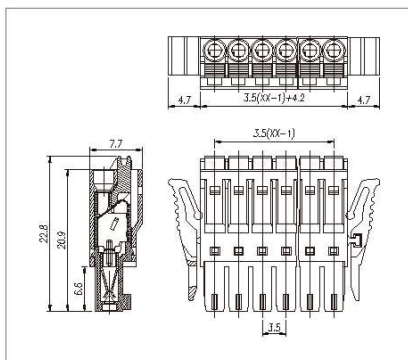



MODEL: WJ15EDGRHB-THT-3.5




MODEL: WJ15EDGVHBM-THT-3.5



MODEL: WJ15EDGRHBM-THT-3.5



MATERIAL	
Nut	M2.5, Brass
Pin header	Brass, Sn plated
Housing	LCP, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	8A 10A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+130°C
Max Soldering	+285°C for 10 Sec

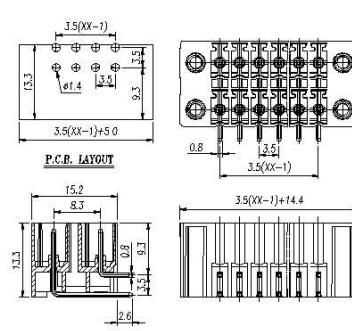



Pitch:3.5mm

MODEL: WJ15EDGVHBN-THT-3.5

CERTIFICATION	UL
---------------	----



Pitch:3.5mm

MODEL: WJ15EDGRHBN-THT-3.5

CERTIFICATION	UL
---------------	----




Pitch:3.5/3.81mm


MODEL: WJ15EDGK

CERTIFICATION	UL
---------------	----


MATERIAL		
Nut	M2.5, Brass	
Pin header	Brass, Sn plated	
Housing	LCP, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+130℃	
Max Soldering	+285℃ for 10 Sec	

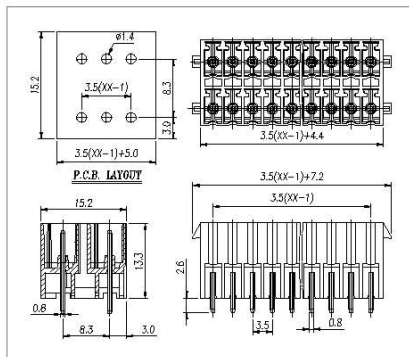

MATERIAL		
Nut	M2.5, Brass	
Pin header	Brass, Sn plated	
Housing	LCP, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+130℃	
Max Soldering	+285℃ for 10 Sec	

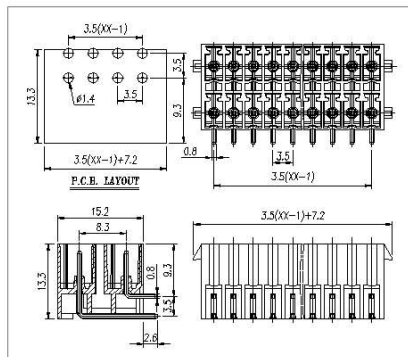

MATERIAL		
Screws	M2.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28~16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	6~7mm	

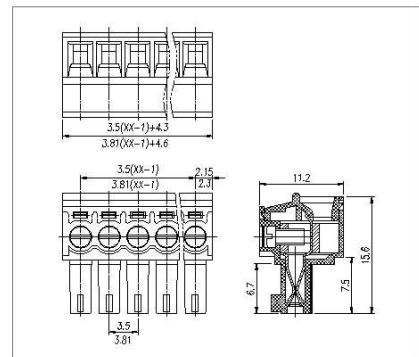

PLUG-IN TERMINAL BLOCK



Pitch:3.5/3.81mm

MODEL: WJ15EDGKM

CERTIFICATION



Pitch:3.5/3.81mm

MODEL: WJ15EDGKA

CERTIFICATION




Pitch:3.5/3.81mm

MODEL: WJ15EDGKAM


CERTIFICATION




MATERIAL		
Screws	M2.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28~16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	6~7mm	

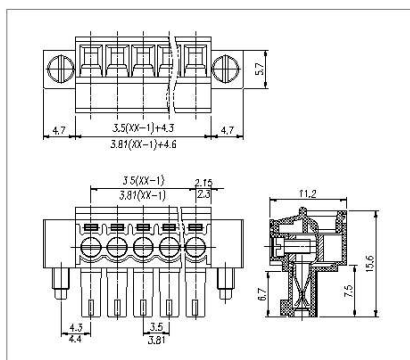

MATERIAL		
Screws	M2.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28-16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	6-7mm	

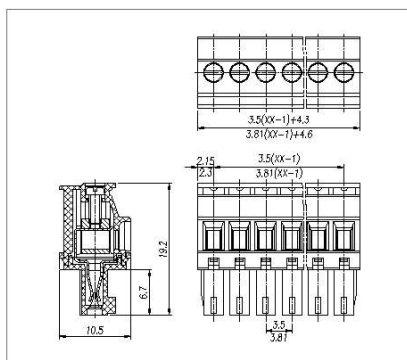

MATERIAL		
Screws	M2.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28~16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	6~7mm	

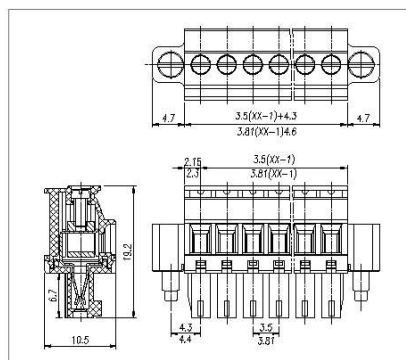



Pitch:3.5/3.81mm

MODEL: WJ15EDGKB

CERTIFICATION	.R.
---------------	------------



Pitch:3.5/3.81mm

MODEL: WJ15EDGKBM

CERTIFICATION	.R.
---------------	------------




Pitch:3.81mm


MODEL: WJ15EDGKC-3.81

CERTIFICATION	.R.
---------------	------------


MATERIAL		
Screws	M2.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28-16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	6-7mm	

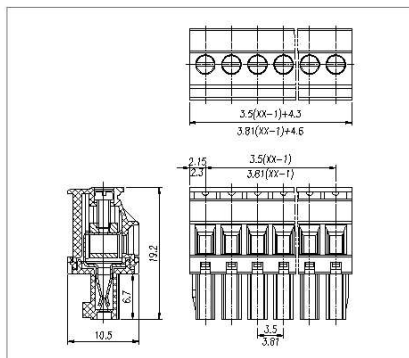

MATERIAL		
Screws	M2.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28~16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	6~7mm	

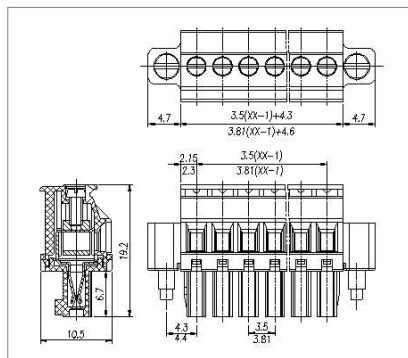

MATERIAL		
Screws	M2.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Slide block	Steel Zn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28~16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	6~7mm	

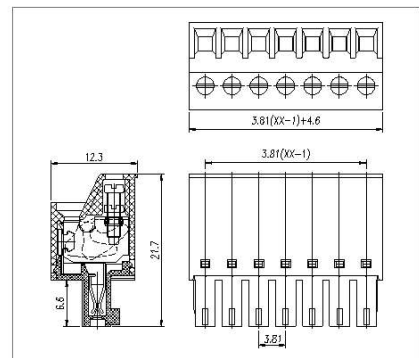

PLUG-IN TERMINAL BLOCK



Pitch: 3.81mm

MODEL: WJ15EDGKCM-3.81

CERTIFICATION



Pitch: 3.5/3.81mm

MODEL: WJ15EDGKD-3.5/3.81

CERTIFICATION



Pitch: 3.5/3.81mm

MODEL: WJ15EDGKDM-3.5/3.81




CERTIFICATION




MATERIAL		
Screws	M2.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Slide block	Steel Zn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28~18AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/D.C500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	6~7mm	

MATERIAL		
Clamp	Phosphor bronze, Ni plated	
Shrapnel	Stainless steel	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28~18AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	6~7mm	

MATERIAL		
Clamp	Phosphor bronze, Ni plated	
Shrapnel	Stainless steel	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28-18AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C--+105°C	
Strip length	6~7mm	

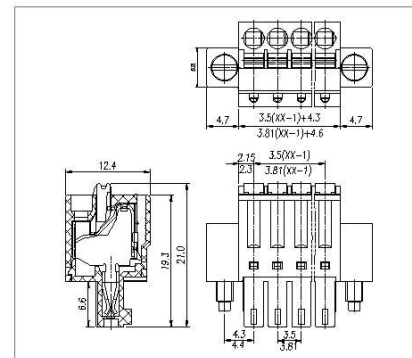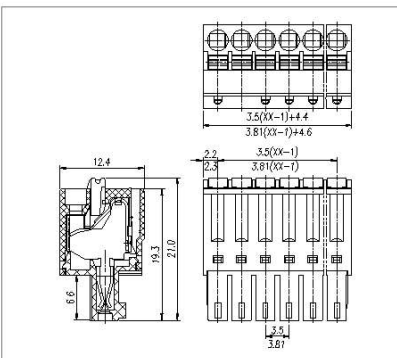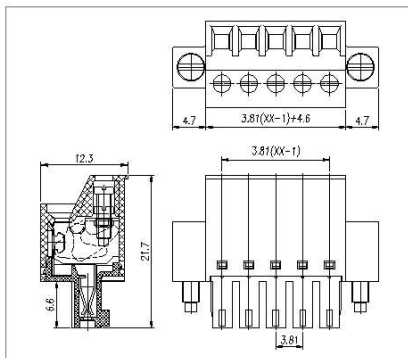


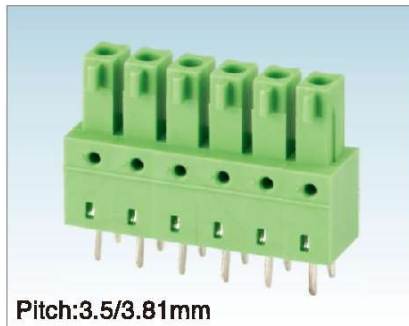

Pitch:3.5/3.81mm

MODEL: WJ15EDGB-3.5/3.81

CERTIFICATION	.R.
---------------	------------

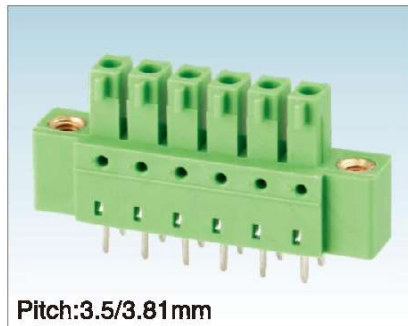

Pitch:3.5/3.81mm

MODEL: WJ15EDGBM-3.5/3.81

CERTIFICATION	.R.
---------------	------------




Pitch:3.5/3.81mm


MODEL: WJ15EDGA-3.5/3.81

CERTIFICATION	.R.
---------------	------------


MATERIAL		
Pin header	Phosphor bronze, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃→+105℃	
Max. soldering	+250℃ for 5 Sec	

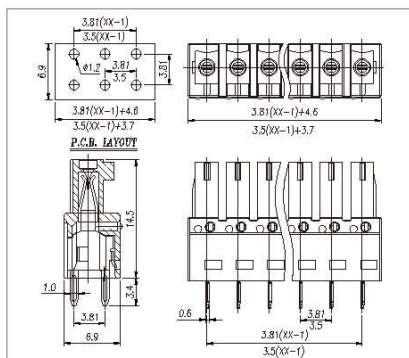

MATERIAL		
Nut	M2.5, Brass	
Pin header	Phosphor bronze, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

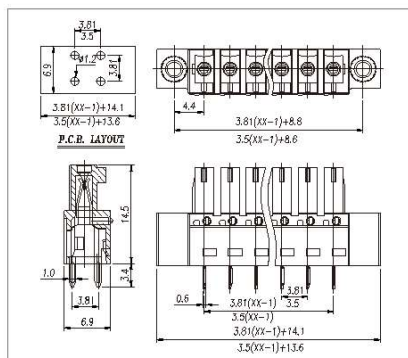

MATERIAL		
Pin header	Phosphor bronze, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

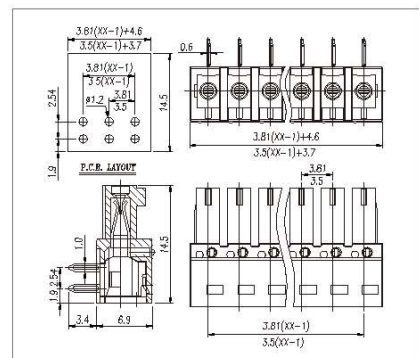

PLUG-IN TERMINAL BLOCK



Pitch:3.5/3.81mm

MODEL: WJ15EDGAM-3.81



Pitch:3.81mm

MODEL: WJ15EDGKR-3.81






Pitch:3.81mm

MODEL: WJ15EDGKRM-3.81

MATERIAL		
Nut	M2.5, Brass	
Pin header	Phosphor bronze, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	

MATERIAL		
Screws	M2.0 Steel Zn plated	
Conductor	Brass, Sn plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Wire range	28~16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	7~8mm	

MATERIAL		
Screws	M2.0 Steel Zn plated	
Conductor	Brass, Sn plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Wire range	28~16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	7~8mm	

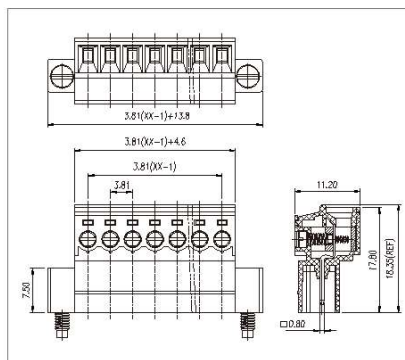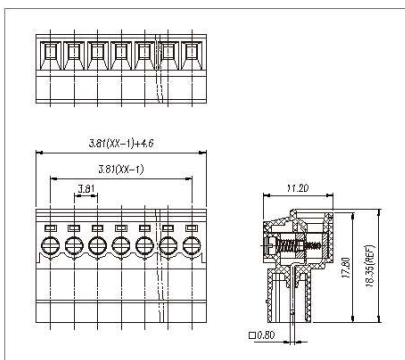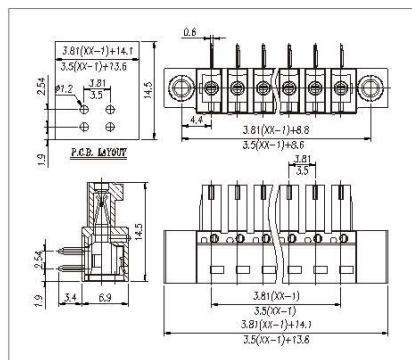



Pitch:3.81mm

MODEL: WJ15EDGKRN-3.81



Pitch:3.5/3.81mm

MODEL: WJ15EDGVC




Pitch:3.5/3.81mm


MODEL: WJ15EDGRC




MATERIAL		
Nut	M2.5, Brass	
Screws	M2.0 Steel Zn plated	
Conductor	Brass, Sn plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Wire range	28~16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃→+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	7~8mm	

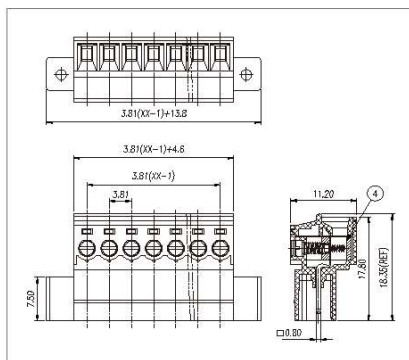


MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

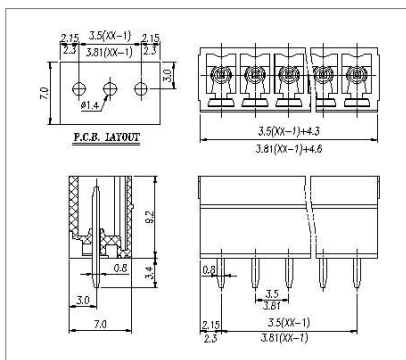

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	


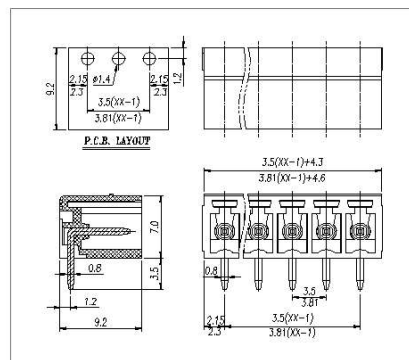


PLUG-IN TERMINAL BLOCK

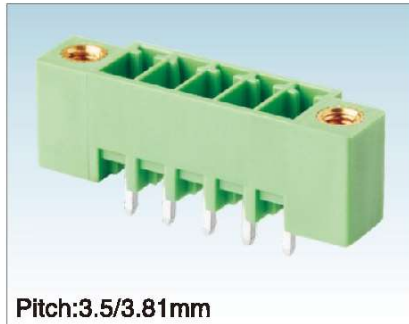


Pitch: 3.5/3.81mm

MODEL: WJ15EDGVM

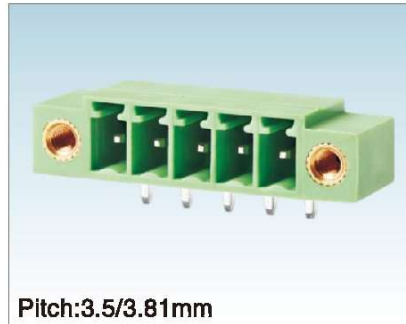


Pitch: 3.5/3.81mm

MODEL: WJ15EDGRM




Pitch: 3.81mm


MODEL: WJ15CDGM-3.81




MATERIAL		
Nut	M2.5,Brass	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/D/C500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

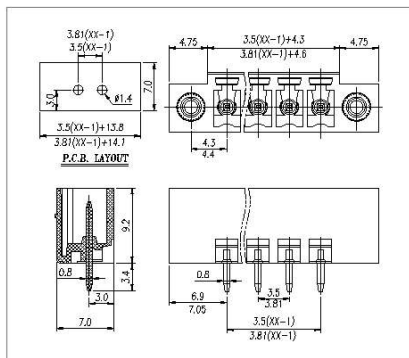


MATERIAL		
Nut	M2.5, Brass	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

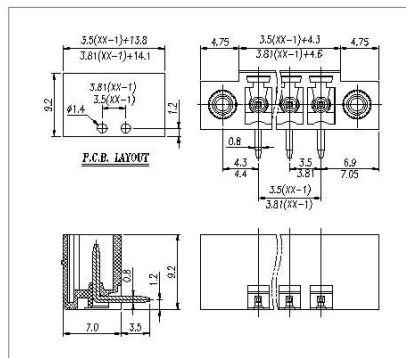



MATERIAL		
Nut	M2.5, Brass	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	

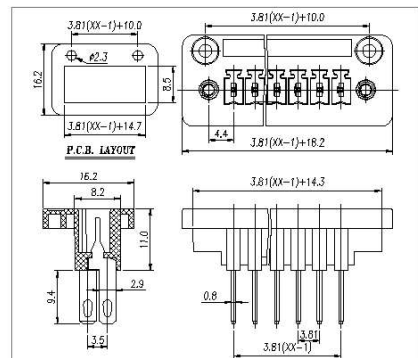

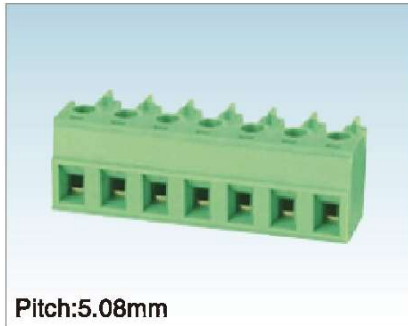



Pitch:5.08mm

WJ15EDGK-5.08

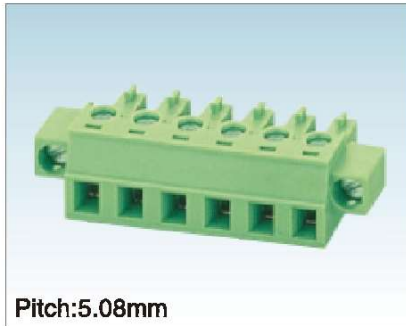


Pitch:5.08mm

WJ15EDGKM-5.08

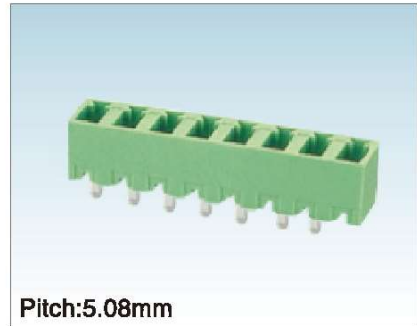


Pitch:5.08mm


WJ15EDGVC-5.08




MATERIAL		
Screws	M2.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28-16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/D.C500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	6-7mm	

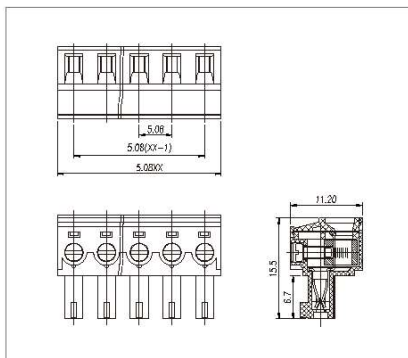


MATERIAL		
Screws	M2.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28~16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/D.C500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~-+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	6~7mm	

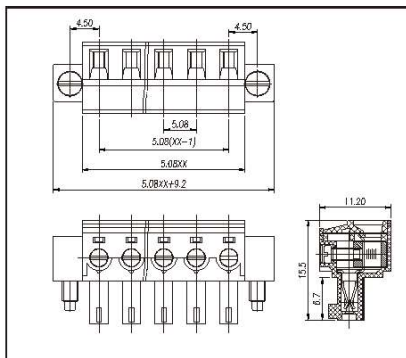

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

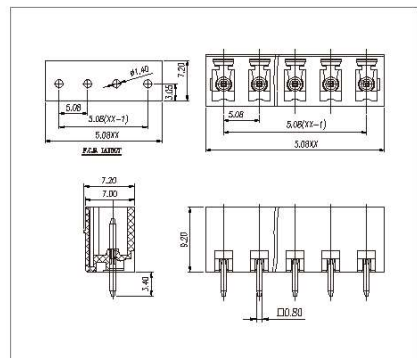


PLUG-IN TERMINAL BLOCK

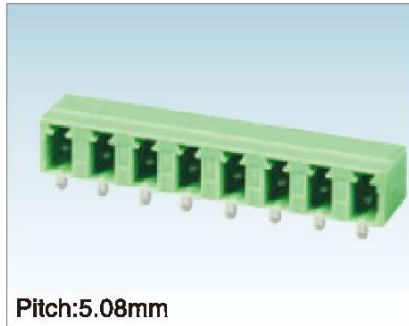

Pitch:5.08mm

WJ15EDGRC-5.08


CERTIFICATION

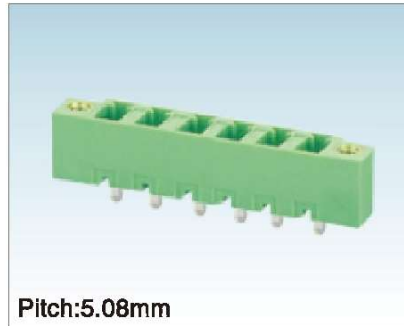

Pitch:5.08mm

WJ15EDGVM-5.08

CERTIFICATION

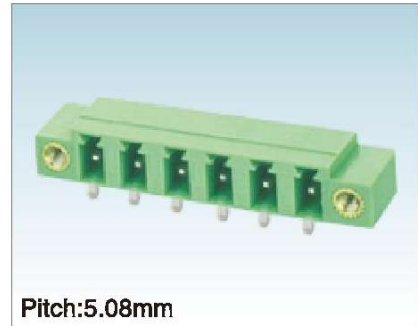

Pitch:5.08mm




WJ15EDGRM-5.08

CERTIFICATION

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Contact resistance	20mΩ	
Insulation resistance	500M Ω/D C500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Nut	M2.5,Brass	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Nut	M2.5, Brass	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

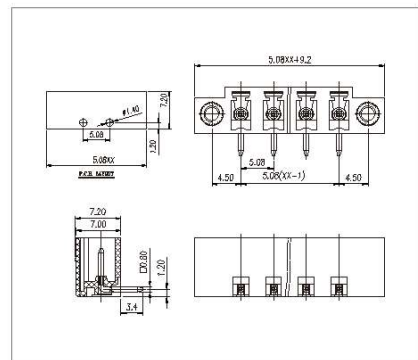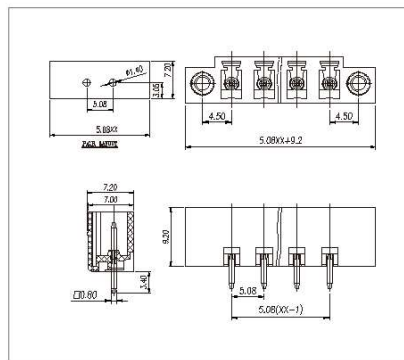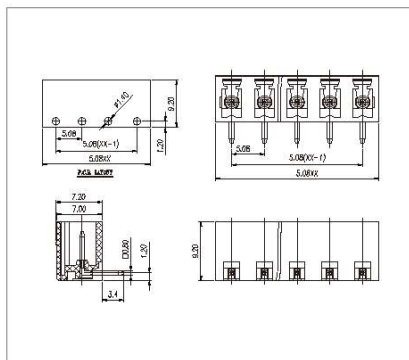



Pitch:3.5/3.81mm

MODEL: WJ15EDGVT

CERTIFICATION	.F.
---------------	-----



Pitch:3.5/3.81mm

MODEL: WJ15EDGVMT

CERTIFICATION	.F.
---------------	-----




Pitch:3.5/3.81mm


MODEL: WJ15EDGRT

CERTIFICATION	.F.
---------------	-----


MATERIAL	
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	8A 7A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

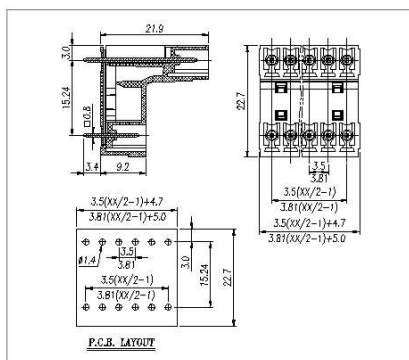

MATERIAL	
Nut	M2.5, Brass
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	8A 7A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

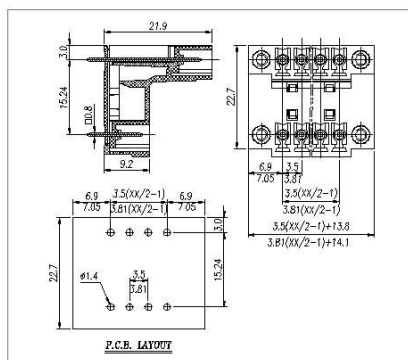

MATERIAL	
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	8A 7A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

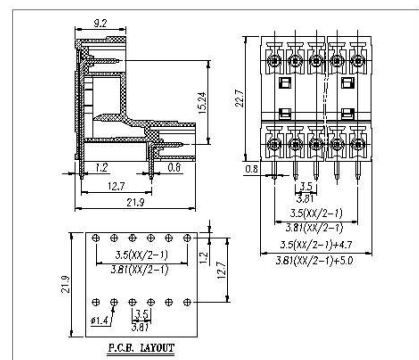

PLUG-IN TERMINAL BLOCK



Pitch:3.5/3.81mm

MODEL: WJ15EDGRTM

CERTIFICATION	
---------------	--



Pitch:3.5/3.81mm

MODEL: WJ15EDGVH

CERTIFICATION	
---------------	--



Pitch:3.5/3.81mm




MODEL: WJ15EDGVHM

CERTIFICATION	
---------------	--

MATERIAL	
Nut	M2.5,Brass
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	8A 7A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

MATERIAL	
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	8A 7A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

MATERIAL	
Nut	M2.5,Brass
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	8A 7A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

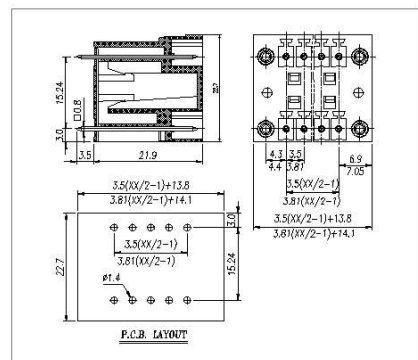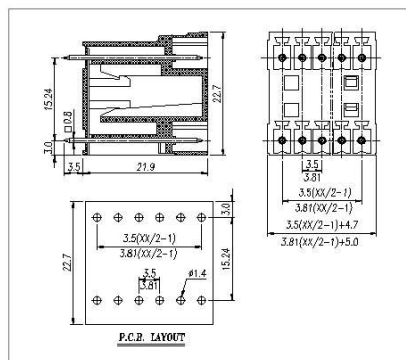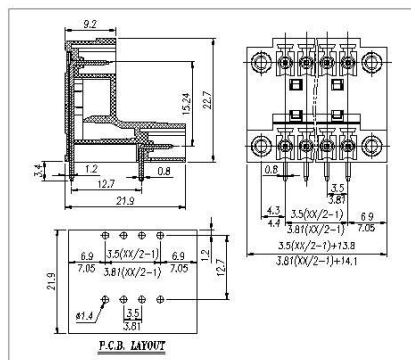



Pitch:3.5/3.81mm

MODEL: WJ15EDGRH

CERTIFICATION	.F.
---------------	-----



Pitch:3.5/3.81mm

MODEL: WJ15EDGRHM

CERTIFICATION	.F.
---------------	-----




Pitch:5.0/5.08mm


MODEL: WJ2EDGK-5.0/5.08

CERTIFICATION	.F. .
---------------	-------


MATERIAL	
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	8A 7A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

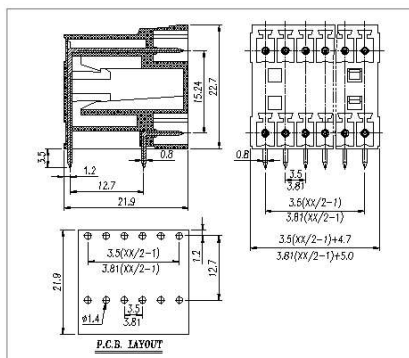

MATERIAL	
Nut	M2.5, Brass
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	8A 7A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

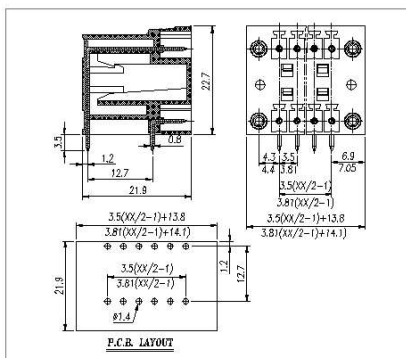

MATERIAL	
Screws	M3.0 Steel Zn plated
Clamp	Phosphor bronze, Ni plated
Cage	Brass, Ni plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 450V
Rated current	15A 20A
Wire range	28~14AWG 2.5mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec
Torque	5.10kgf-cm/0.5Nm/4.43Lbin
Strip length	7~8mm

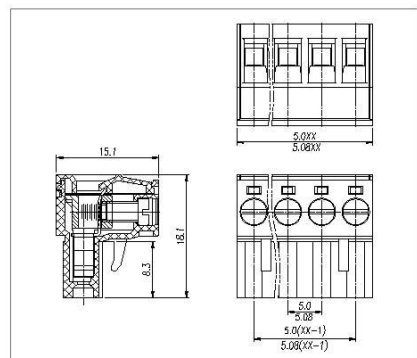




91




MATERIAL		
Screws	M3.0 Steel	Zn plated
Clamp	Phosphor bronze,	Ni plated
Cage	Brass,	Ni plated
Housing	PA66,	UL94V-0
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ	DC500V
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C	For 5 Sec
Torque	5.10kgf~cm/0.5Nm	4.43LbIn
Strip length	7~8mm	

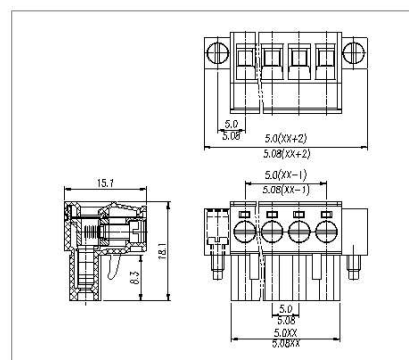




Pitch:7.5/7.62mm

MODEL: WJ2EDGKM-7.5/7.62




Pitch:10.0/10.16mm

MODEL: WJ2EDGKM-10.0/10.16




Pitch:5.0/5.08mm


MODEL: WJ2EDGKA-5.0/5.08




MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

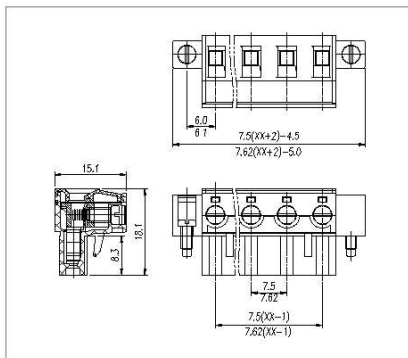

MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	600V	750V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43lbin	
Strip length	7~8mm	

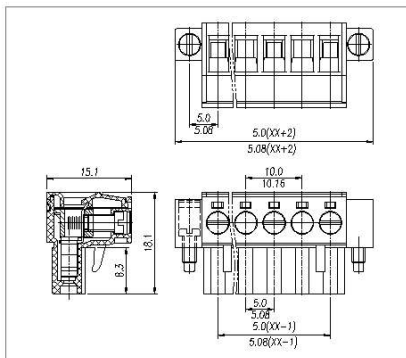

MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

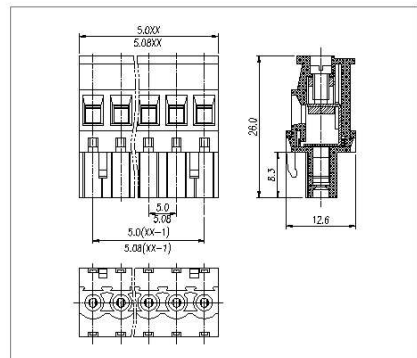

PLUG-IN TERMINAL BLOCK



Pitch: 7.5/7.62mm

MODEL: WJ2EDGKA-7.5/7.62

CERTIFICATION



Pitch: 5.0/5.08mm

MODEL: WJ2EDGKAM-5.0/5.08

CERTIFICATION



Pitch: 7.5/7.62mm

MODEL: WJ2EDGKAM-7.5/7.62




CERTIFICATION



MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL84V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7-8mm	

MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

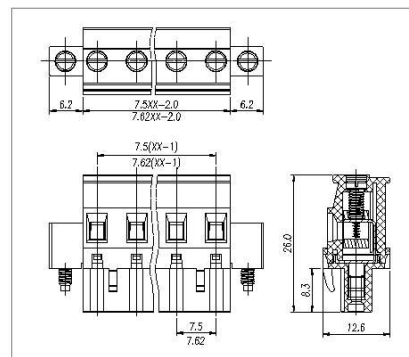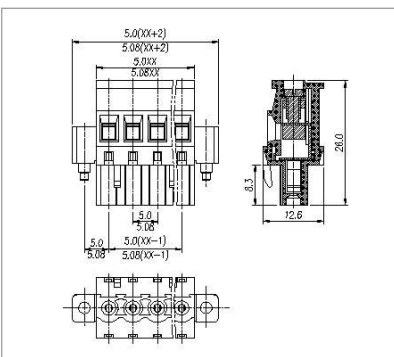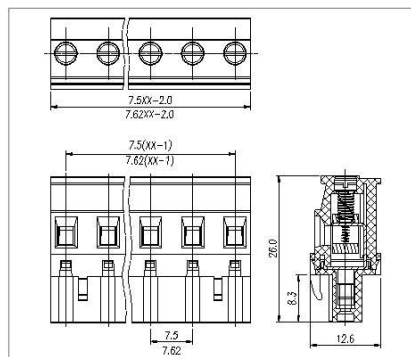



Pitch:5.0/5.08mm

MODEL: WJ2EDGKB-5.0/5.08

CERTIFICATION	.R.
---------------	------------



Pitch:7.5/7.62mm

MODEL: WJ2EDGKB-7.5/7.62

CERTIFICATION	.R.
---------------	------------




Pitch:5.0/5.08mm


MODEL: WJ2EDGKBM-5.0/5.08

CERTIFICATION	.R.
---------------	------------


MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

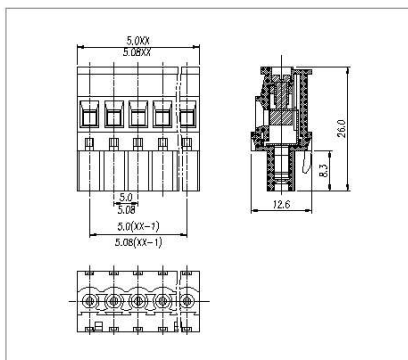

MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20m Ω	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43lbin	
Strip length	7~8mm	

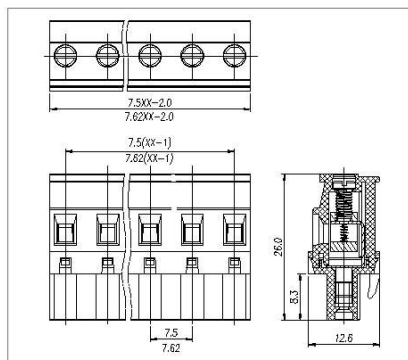

MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

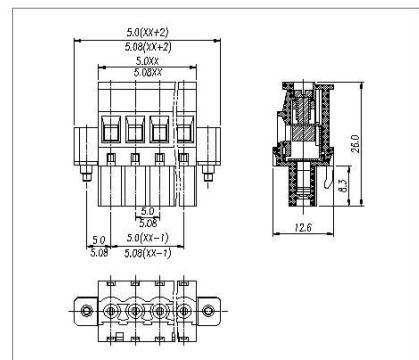

PLUG-IN TERMINAL BLOCK



Pitch: 7.5/7.62mm

MODEL: WJ2EDGKBM-7.5/7.62

CERTIFICATION



Pitch: 5.0/5.08mm

MODEL: WJ2EDGKC

CERTIFICATION




Pitch: 5.0/5.08mm

MODEL: WJ2EDGKCM


CERTIFICATION




MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	



MATERIAL		
Screws	M2.5 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Slide block	Steel Zn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	7~8mm	



MATERIAL		
Screws	M2.5 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Slide block	Steel Zn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	7~8mm	





Pitch:5.08mm

MODEL: WJ2EDGKD

CERTIFICATION	.F.
---------------	-----



Pitch:5.08mm

MODEL: WJ2EDGKDM

CERTIFICATION	.F.
---------------	-----



Pitch:5.08mm




MODEL: WJ2EDGKDG

CERTIFICATION	
---------------	--

MATERIAL		
Clamp	Phosphor bronze, Ni plated	
Shrapnel	Stainless steel	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	20A
Wire range	28-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	7~8mm	

MATERIAL		
Clamp	Phosphor bronze, Ni plated	
Shrapnel	Stainless steel	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	20A
Wire range	28-14AWG	2.5mm ²
Contact resistance	20m Ω	
Insulation resistance	500M Ω /DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃--+105℃	
Strip length	7-8mm	

MATERIAL		
Clamp	Phosphor bronze, Ni plated	
Shrapnel	Stainless steel	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	20A
Wire range	28-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	7-8mm	

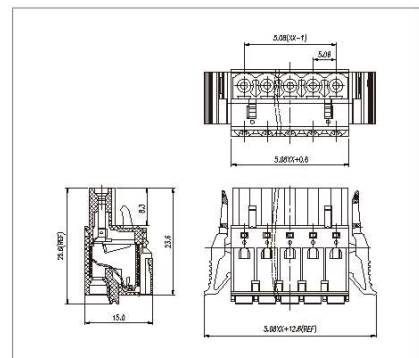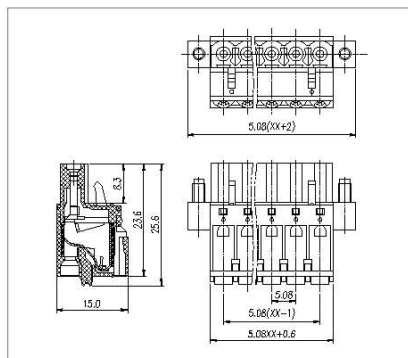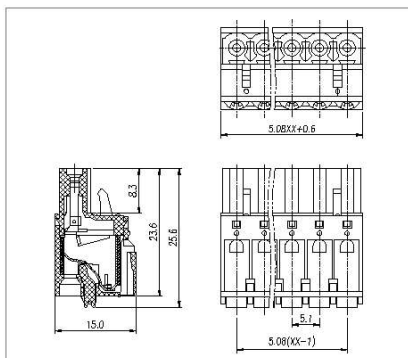

PLUG-IN TERMINAL BLOCK



Pitch:5.0mm

MODEL: WJ2EDGKF

CERTIFICATION	
---------------	--



Pitch:5.0/5.08mm

MODEL: WJ2EDGKZ

CERTIFICATION	
---------------	--



Pitch:5.0/5.08mm




MODEL: WJ2EDGKZM


CERTIFICATION	
---------------	--

MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

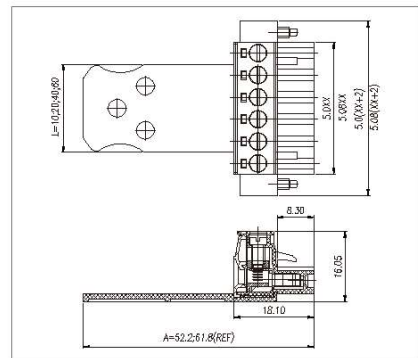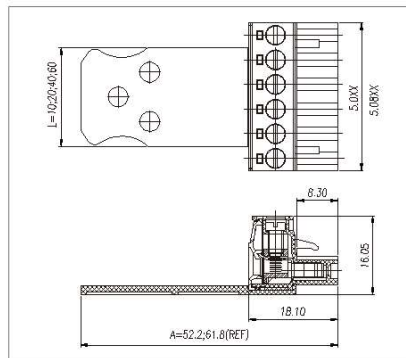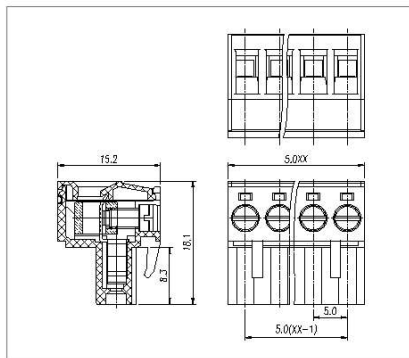


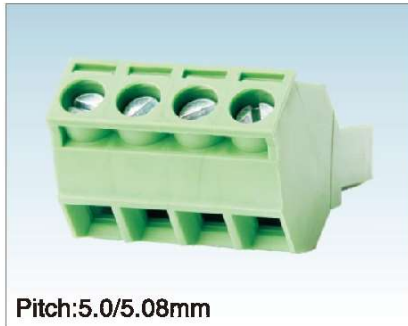

Pitch:5.0/5.08mm

MODEL: WJ2EDGKL


CERTIFICATION	.UL.
---------------	-------------

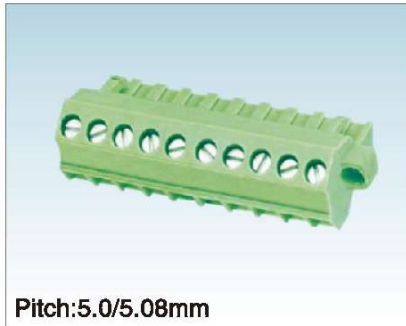

Pitch:5.0/5.08mm

MODEL: WJ2EDGKLM

CERTIFICATION	.UL.
---------------	-------------

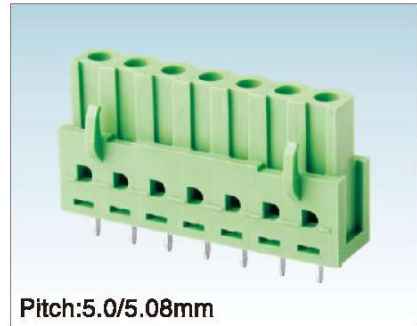


Pitch:5.0/5.08mm


MODEL: WJ2EDGB

CERTIFICATION	.UL.
---------------	-------------


MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

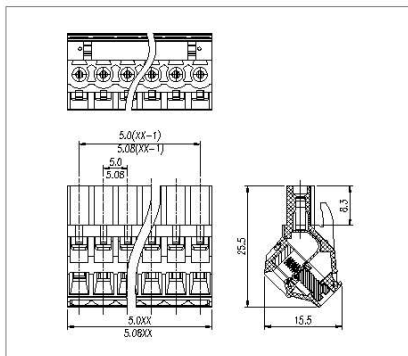


MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43lbin	
Strip length	7~8mm	

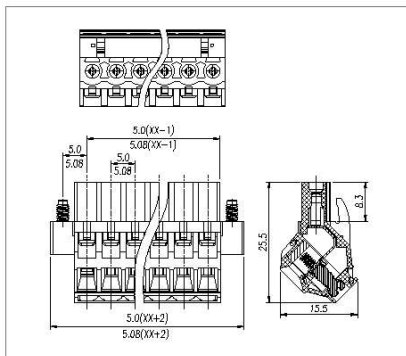

MATERIAL		
Pin header	Phosphor bronze, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~-+105℃	
Max. soldering	+250℃ for 5 Sec	

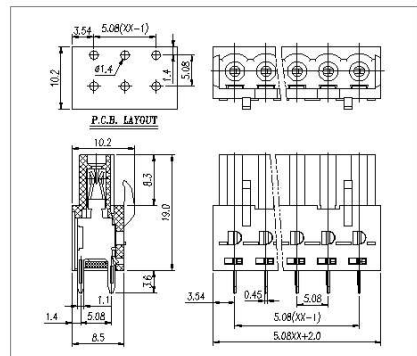

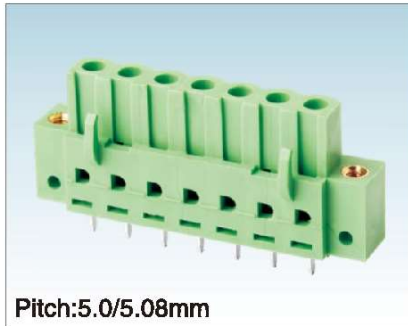

Pitch: 5.0/5.08mm

MODEL: WJ2EDGBM


CERTIFICATION



Pitch: 5.0/5.08mm

MODEL: WJ2EDGA

CERTIFICATION

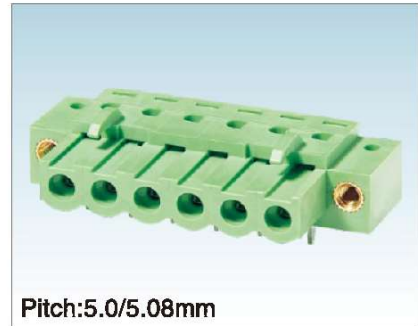

Pitch: 5.0/5.08mm

MODEL: WJ2EDGAM




CERTIFICATION




MATERIAL		
Nut	M2.5, Brass	
Pin header	Phosphor bronze, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/D/C500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Pin header	Phosphor bronze, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Nut	M2.5,Brass	
Pin header	Phosphor bronze, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	

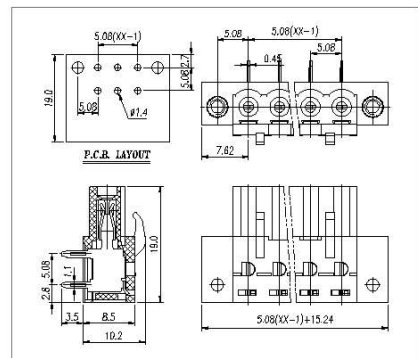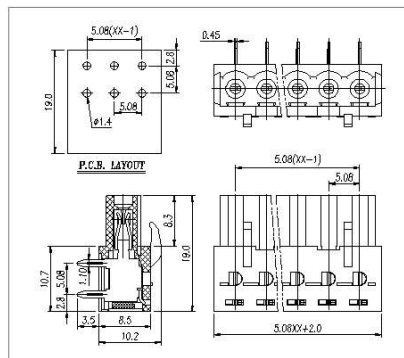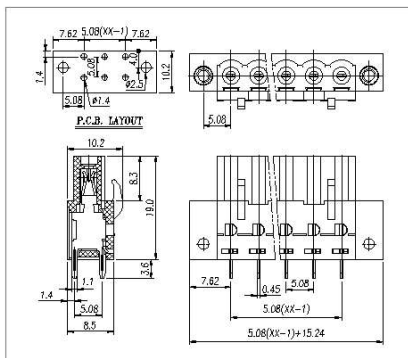

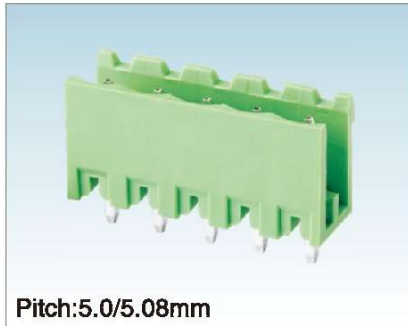

Pitch:5.0/5.08mm

MODEL: WJ2EDGV-5.0/5.08

CERTIFICATION	
---------------	--



Pitch:7.5/7.62mm

MODEL: WJ2EDGV-7.5/7.62

CERTIFICATION	
---------------	--




Pitch:10.0/10.16mm


MODEL: WJ2EDGV-10.0/10.16

CERTIFICATION	
---------------	--


MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

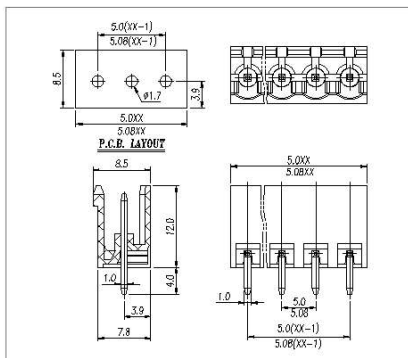

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

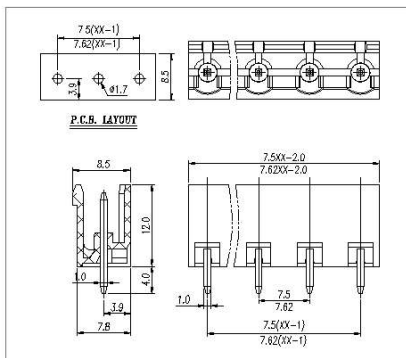

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	600V	750V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

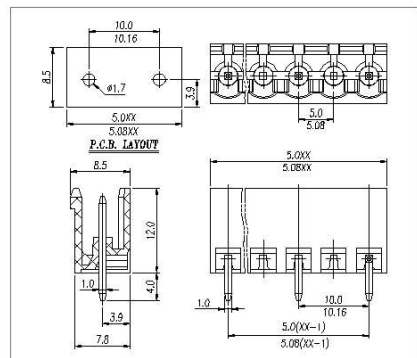

PLUG-IN TERMINAL BLOCK



Pitch: 5.0/5.08mm

MODEL: WJ2EDGR-5.0/5.08

CERTIFICATION



Pitch: 7.5/7.62mm

MODEL: WJ2EDGR-7.5/7.62

CERTIFICATION



Pitch: 10.0/10.16mm

MODEL: WJ2EDGR-10.0/10.16




CERTIFICATION




MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	600V	750V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

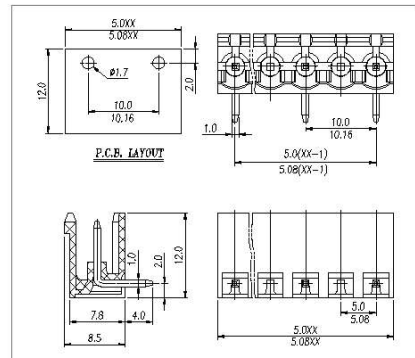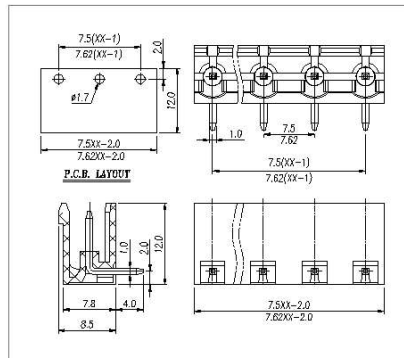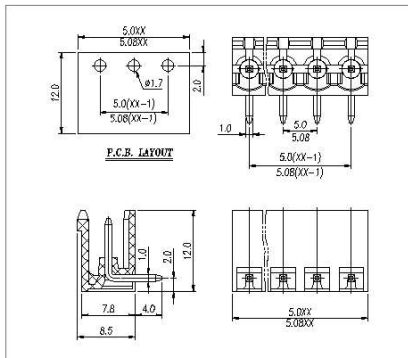


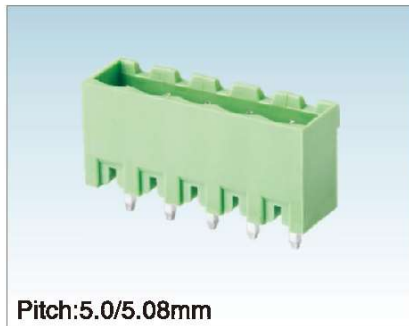

Pitch:5.0/5.08mm

MODEL: WJ2EDGVC-5.0/5.08


CERTIFICATION	
---------------	--

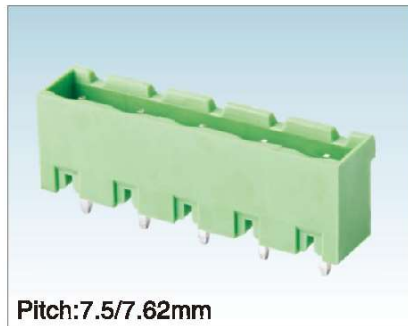

Pitch:7.5/7.62mm

MODEL: WJ2EDGVC-7.5/7.62

CERTIFICATION	
---------------	--

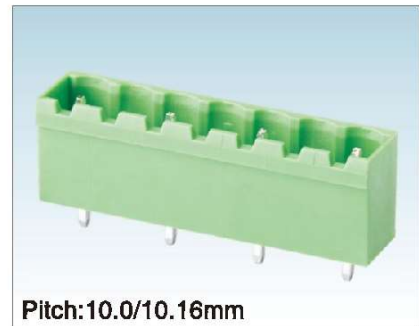


Pitch:10.0/10.16mm


MODEL: WJ2EDGVC-10.0/10.16

CERTIFICATION	
---------------	--


MATERIAL	
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 450V
Rated current	15A 20A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

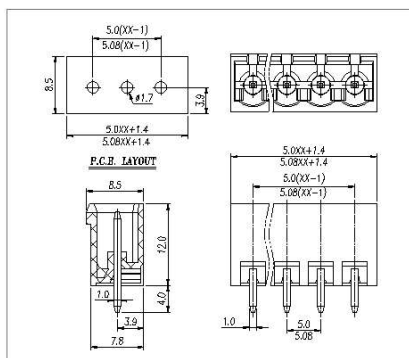


MATERIAL	
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 450V
Rated current	15A 20A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

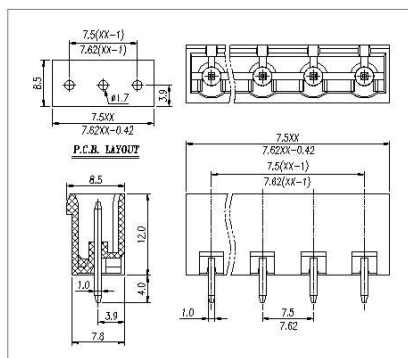

MATERIAL	
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	600V 750V
Rated current	15A 20A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

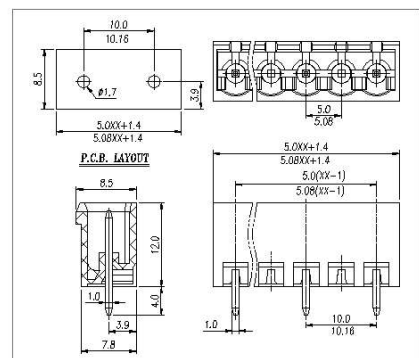


PLUG-IN TERMINAL BLOCK

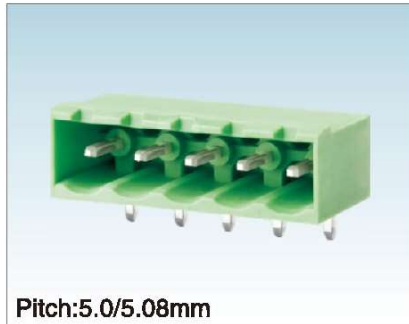

Pitch: 5.0/5.08mm

MODEL: WJ2EDGRC-5.0/5.08


CERTIFICATION

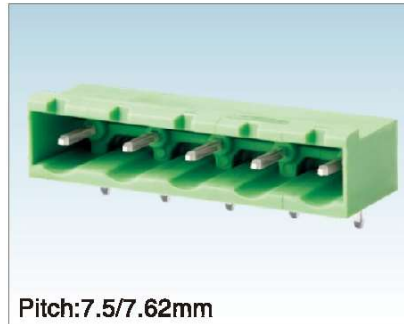

Pitch: 7.5/7.62mm

MODEL: WJ2EDGRC-7.5/7.62

CERTIFICATION

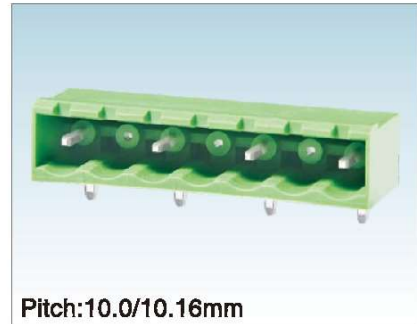

Pitch: 10.0/10.16mm

MODEL: WJ2EDGRC-10.0/10.16




CERTIFICATION




MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃--+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	600V	750V
Rated current	16A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

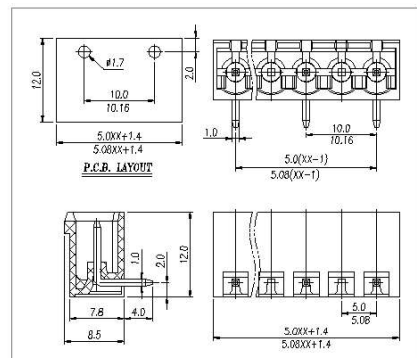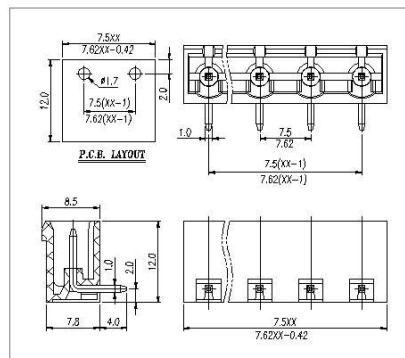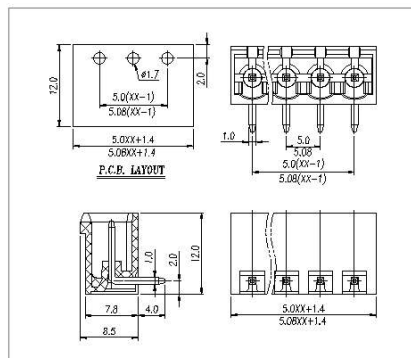


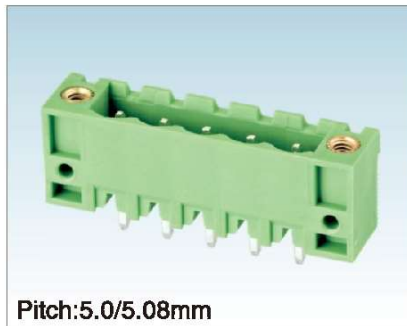

Pitch:5.0/5.08mm

MODEL: WJ2EDGVM-5.0/5.08


CERTIFICATION

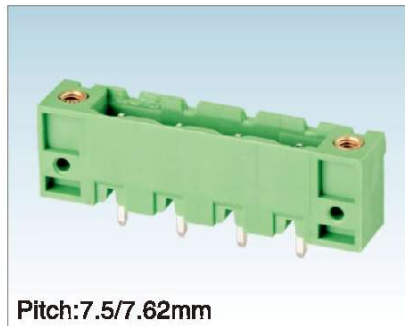

Pitch:7.5/7.62mm

MODEL: WJ2EDGVM-7.5/7.62

CERTIFICATION

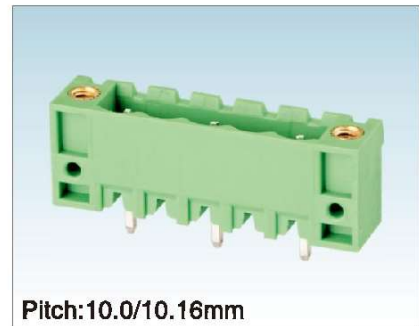

Pitch:10.0/10.16mm

MODEL: WJ2EDGVM-10.0/10.16




CERTIFICATION



MATERIAL		
Nut	M2.5,Brass	
Pin header	Brass, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃--+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Nut	M2.5,Brass	
Pin header	Brass, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	±250℃ for 5 Sec	

MATERIAL		
Nut	M2.5,Brass	
Pin header	Brass, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	600V	750V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

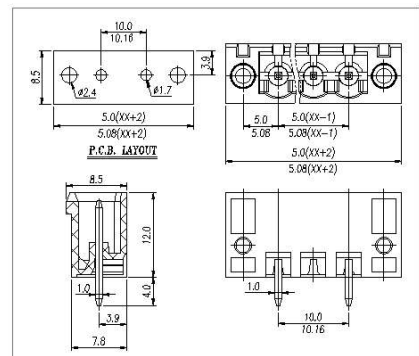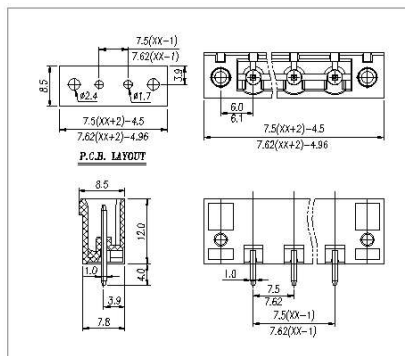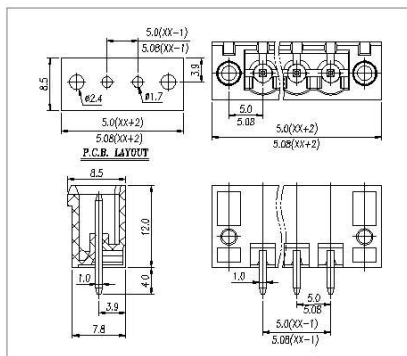



Pitch: 5.0/5.08mm

MODEL: WJ2EDGRM-5.0/5.08

CERTIFICATION



Pitch: 7.5/7.62mm

MODEL: WJ2EDGRM-7.5/7.62

CERTIFICATION



Pitch: 10.0/10.16mm

MODEL: WJ2EDGRM-10.0/10.16




CERTIFICATION




MATERIAL		
Nut	M2.5,Brass	
Pin header	Brass, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Nut	M2.5,Brass	
Pin header	Brass, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Nut	M2.5,Brass	
Pin header	Brass, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	600V	750V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃--+105℃	
Max. soldering	+250℃ for 5 Sec	

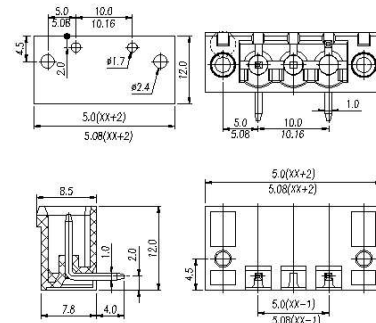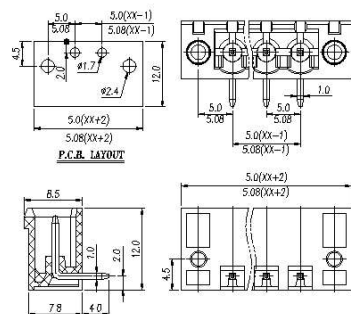


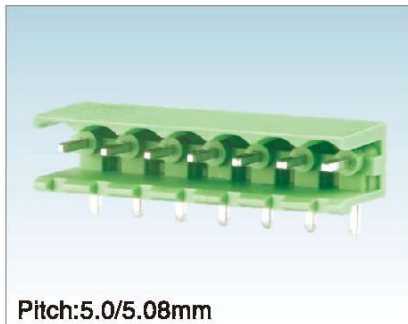

Pitch:5.0/5.08mm

MODEL: WJ2EDGRR-5.0/5.08


CERTIFICATION

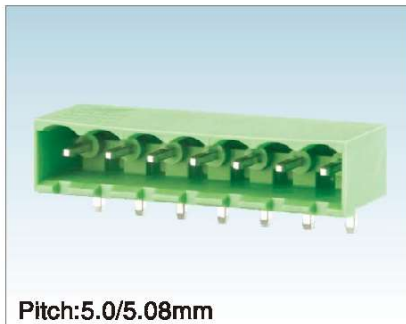

Pitch:5.0/5.08mm

MODEL: WJ2EDGRR-5.0/5.08

CERTIFICATION

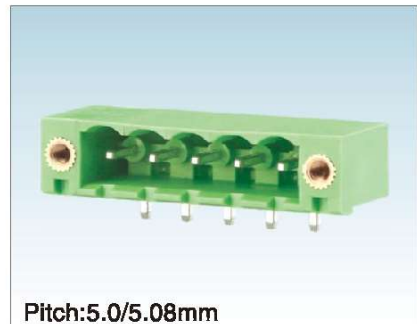

Pitch:5.0/5.08mm




MODEL: WJ2EDGRRM-5.0/5.08

CERTIFICATION


MATERIAL		
Pin header	Brass, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Pin header	Brass, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20m Ω	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Nut	M2.5, Brass	
Pin header	Brass, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	

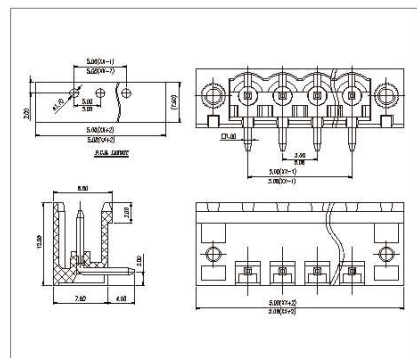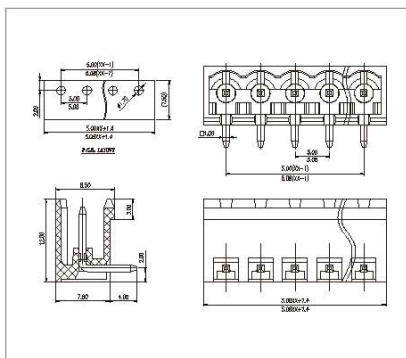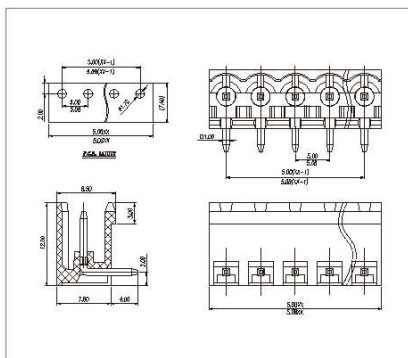


PLUG-IN TERMINAL BLOCK

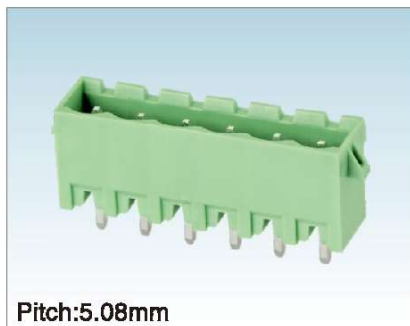

Pitch:5.08mm

WJ2EDGVG-5.08

CERTIFICATION

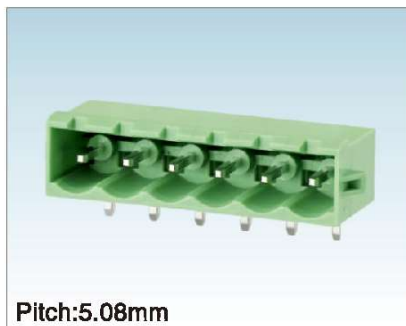

Pitch:5.08mm

WJ2EDGRG-5.08

CERTIFICATION



Pitch:5.08mm

WJ2EDGV-THT-5.08




CERTIFICATION



MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	LCP, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+130℃	
Max. soldering	+285℃ for 10 Sec	

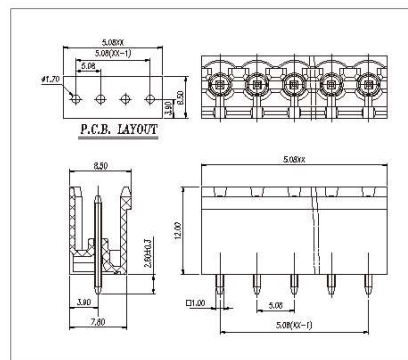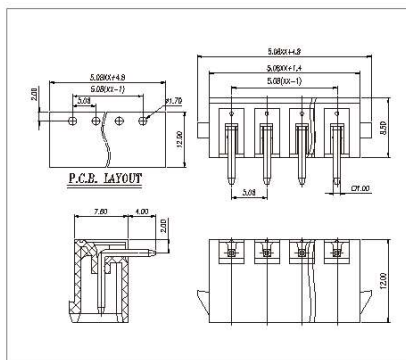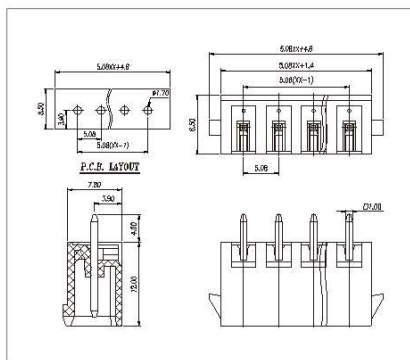



Pitch:5.08mm

WJ2EDGVC-THT-5.08

CERTIFICATION	.F.
---------------	------------



Pitch:5.08mm

WJ2EDGVM-THT-5.08

CERTIFICATION	.F.
---------------	------------



Pitch:5.08mm




WJ2EDGR-THT-5.08

CERTIFICATION	.F.
---------------	------------

MATERIAL		
Pin header	Brass, Sn plated	
Housing	LCP, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+130℃	
Max. soldering	+285℃ for 10 Sec	

MATERIAL		
Nut	M2.5, Brass	
Pin header	Brass, Sn plated	
Housing	LCP, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+130℃	
Max. soldering	+285℃ for 10 Sec	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	LCP, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+130℃	
Max. soldering	+285℃ for 10 Sec	

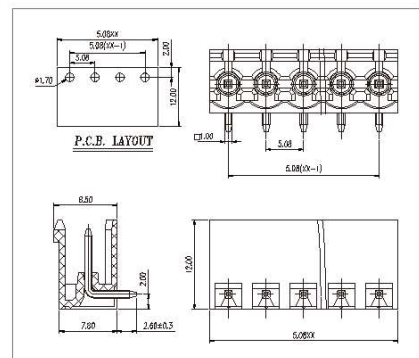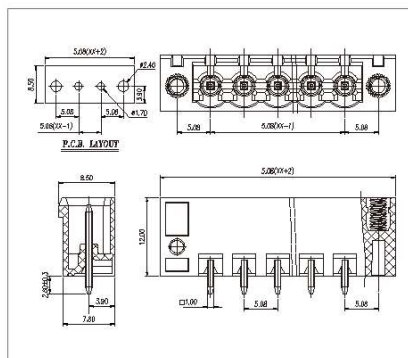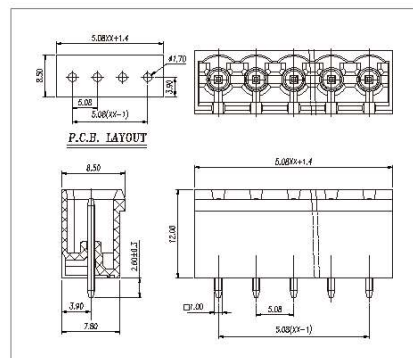



Pitch:5.08mm

WJ2EDGRC-THT-5.08


CERTIFICATION



Pitch:5.08mm

WJ2EDGRM-THT-5.08

CERTIFICATION



Pitch:5.0mm

MODEL: WJ2EDGLF




CERTIFICATION




MATERIAL		
Pin header	Brass, Sn plated	
Housing	LCP, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+130℃	
Max. soldering	+285℃ for 10 Sec	

MATERIAL		
Nut	M2.5,Brass	
Pin header	Brass, Sn plated	
Housing	LCP, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+130℃	
Max. soldering	+285℃ for 10 Sec	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

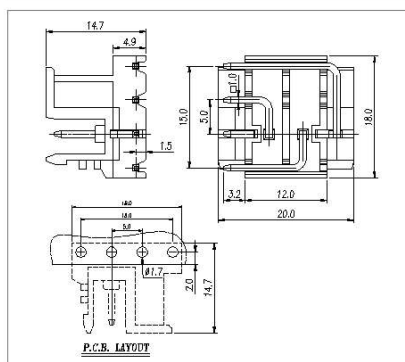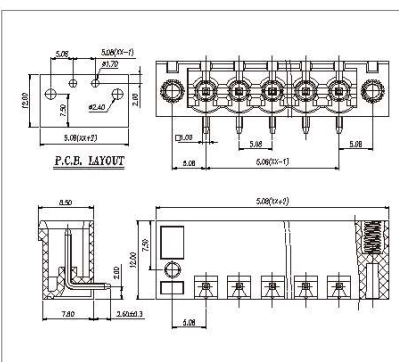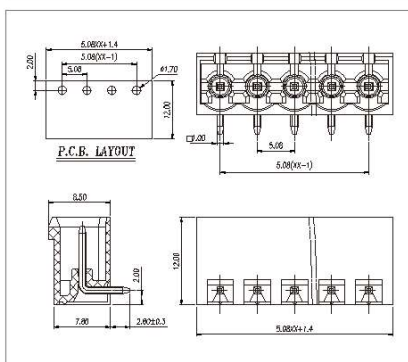


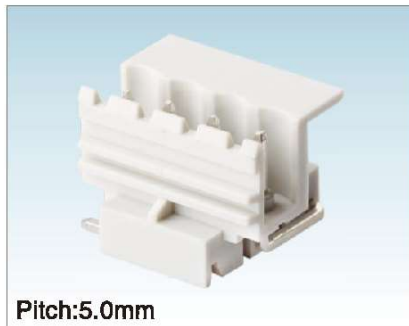

Pitch:5.0mm

MODEL: WJ2EDGRF

CERTIFICATION	.R.
---------------	------------

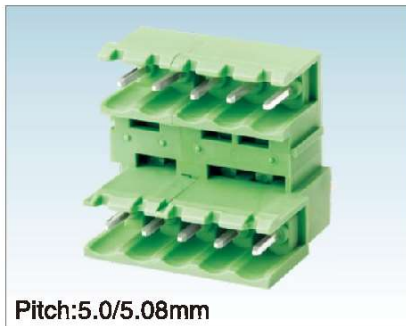

Pitch:5.0/5.08mm

MODEL: WJ2EDGVT

CERTIFICATION	.R.
---------------	------------




Pitch:5.0/5.08mm


MODEL: WJ2EDGVMT

CERTIFICATION	.R.
---------------	------------


MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

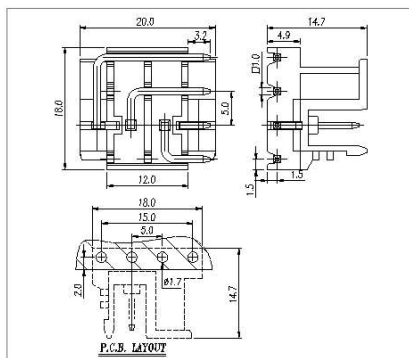

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

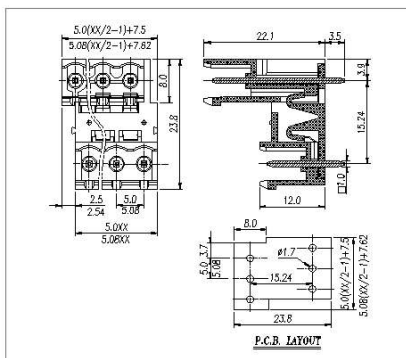

MATERIAL		
Nut	M2.5, Brass	
Pin header	Brass, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	460V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

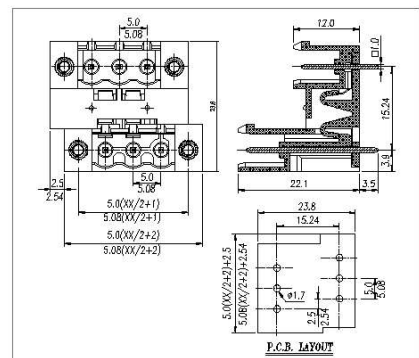



Pitch: 5.0/5.08mm

MODEL: WJ2EDGRT

CERTIFICATION



Pitch: 5.0/5.08mm

MODEL: WJ2EDGVRTM

CERTIFICATION



Pitch: 5.0/5.08mm

MODEL: WJ2EDGVTC




CERTIFICATION




MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Nut	M2.5,Brass	
Pin header	Brass, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

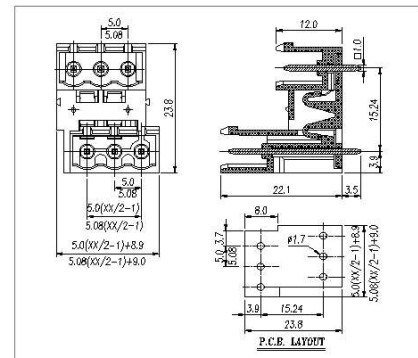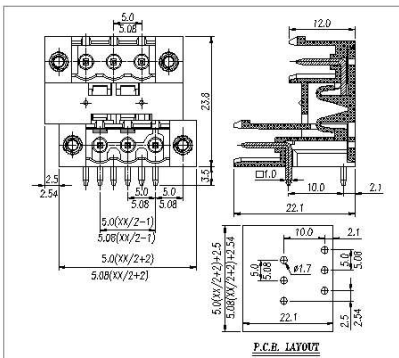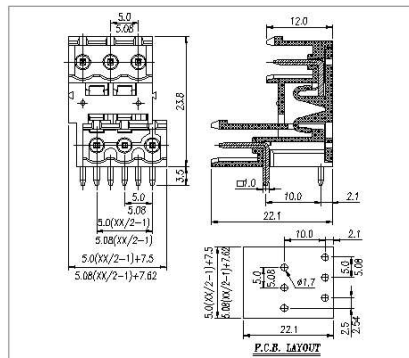


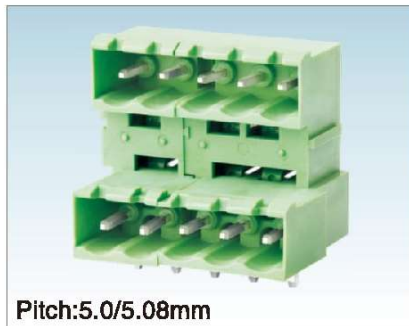

Pitch:5.0/5.08mm

MODEL: WJ2EDGRTC

CERTIFICATION	
---------------	--

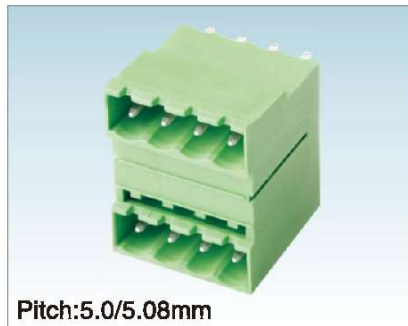

Pitch:5.0/5.08mm

MODEL: WJ2EDGVH

CERTIFICATION	
---------------	--




Pitch:5.0/5.08mm


MODEL: WJ2EDGVHM

CERTIFICATION	
---------------	--


MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃--+105℃	
Max. soldering	+250℃ for 5 Sec	

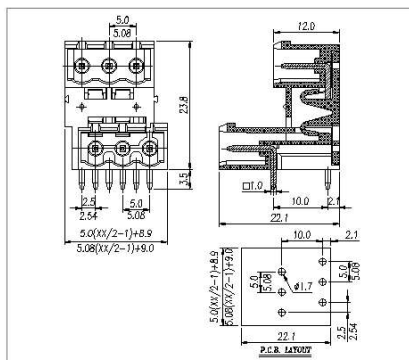

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

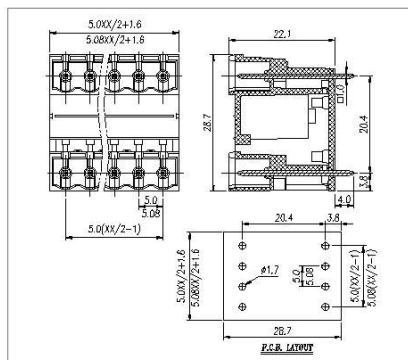

MATERIAL		
Nut	M2.5, Brass	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

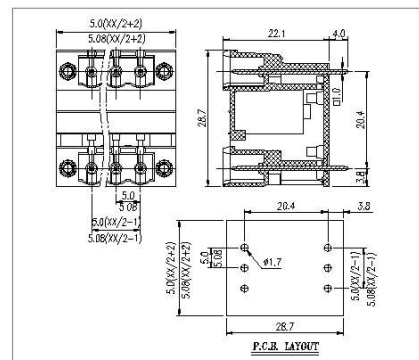

PLUG-IN TERMINAL BLOCK



Pitch: 5.0/5.08mm

MODEL: WJ2EDGRH

CERTIFICATION	
---------------	--



Pitch: 5.0/5.08mm

MODEL: WJ2EDGRHM

CERTIFICATION	
---------------	--



Pitch: 5.08mm




MODEL: WJ2EDGL

CERTIFICATION	
---------------	--

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~-+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Nut	M2.5,Brass	
Pin header	Brass, Si plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	

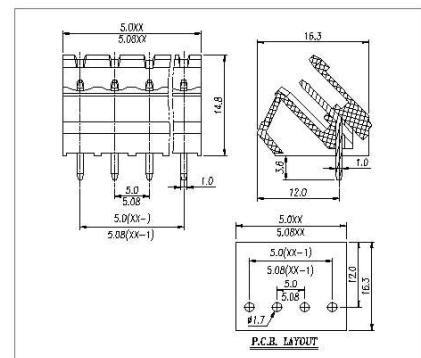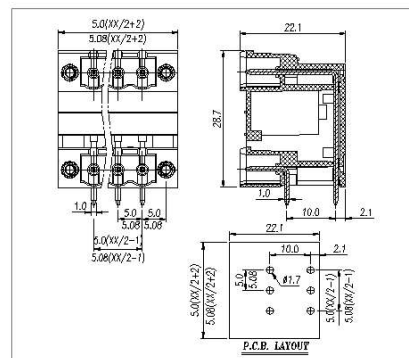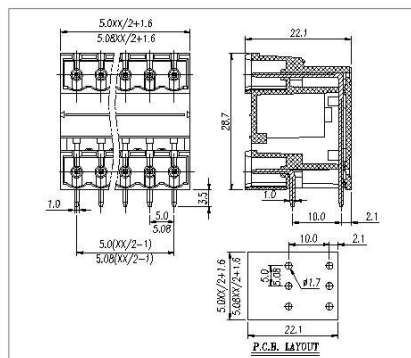



Pitch:5.08mm

MODEL: WJ2EDGLC

CERTIFICATION	UL
---------------	----



Pitch:5.08mm

MODEL: WJ2EDGLM

CERTIFICATION	UL
---------------	----




Pitch:5.08mm


MODEL: WJ2EDGKR

CERTIFICATION	UL
---------------	----


MATERIAL	
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 450V
Rated current	15A 20A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

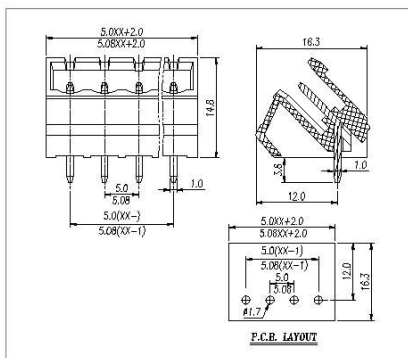

MATERIAL	
Nut	M2.5, Brass
Pin header	Brass, Si plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 450V
Rated current	15A 20A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

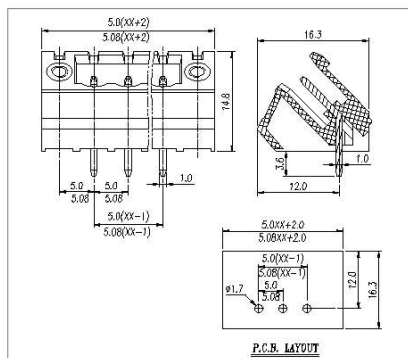

MATERIAL	
Screws	M3.0 Steel Zn plated
Conductor	Brass, Sn plated
Cage	Brass, Ni plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 450V
Rated current	15A 20A
Wire range	28~14AWG 2.5mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1 Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec
Torque	5.10kgf-cm/0.5Nm/4.43Lbin
Strip length	7~8mm

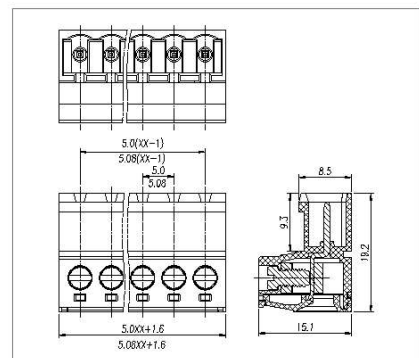



Pitch:5.08mm

MODEL: WJ2EDGKRM

CERTIFICATION	
---------------	--



Pitch:5.08mm

MODEL: WJ2EDGKRN

CERTIFICATION	
---------------	--



Pitch:5.08mm




MODEL: WJ2EDGKRZ

CERTIFICATION	
---------------	--

MATERIAL		
Screws	M3.0 Steel Zn plated	
Conductor	Brass, Sn plated	
Cage	Brass, NI plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

MATERIAL		
Screws	M4.0 Steel, Zn plated	
Nut	M2.6, Brass	
Conductor	Brass, Sn plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

MATERIAL		
Screws	M3.0 Steel Zn plated	
Conductor	Brass, Sn plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	460V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7-8mm	

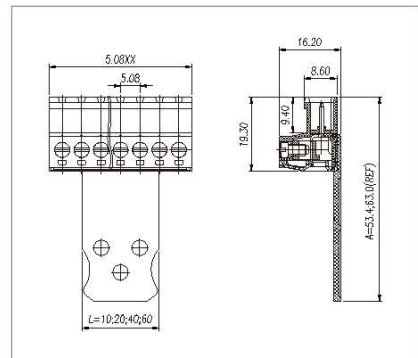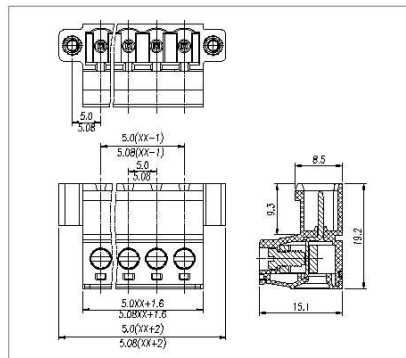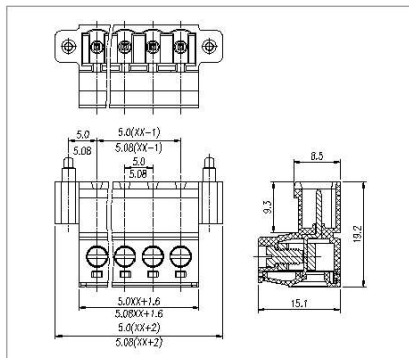




Pitch:5.08mm

MODEL: WJ2EDGKRZM


CERTIFICATION	.R.
---------------	------------

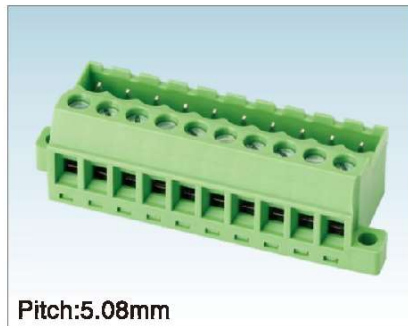

Pitch:5.08mm

WJ2EDGGB-5.08

CERTIFICATION	.R.
---------------	------------

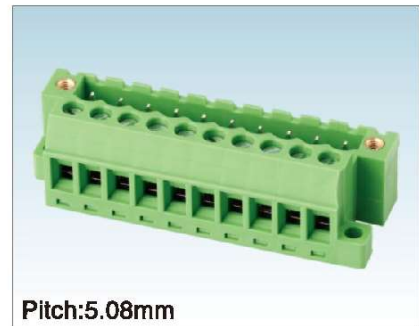

Pitch:5.08mm




WJ2EDGGBM-5.08

CERTIFICATION	.R.
---------------	------------


MATERIAL		
Screws	M3.0 Steel Zn plated	
Conductor	Brass, Sn plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

MATERIAL		
Screws	M3.0 Steel Zn plated	
Conductor	Brass, Sn plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43lbin	
Strip length	7~8mm	

MATERIAL		
Screws	M3.0 Steel Zn plated	
Nut	Brass	
Conductor	Brass, Sn plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

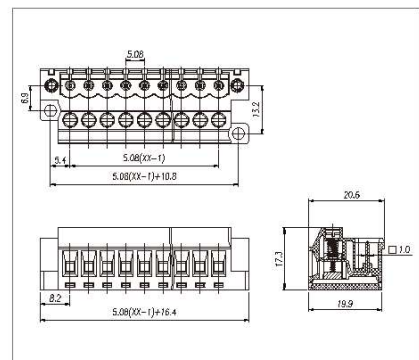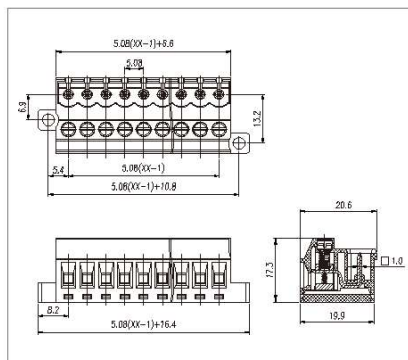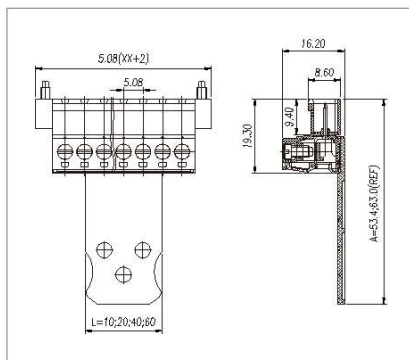

PLUG-IN TERMINAL BLOCK



Pitch:5.08mm

WJ2EDGVK-5.08

CERTIFICATION



Pitch:5.08mm

WJ2EDGVKM-5.08

CERTIFICATION




Pitch:5.08mm

WJ2EDGUVK-5.08


CERTIFICATION




MATERIAL		
Screws	M3.0 Steel Zn plated	
Conductor	Brass, Sn plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω /DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

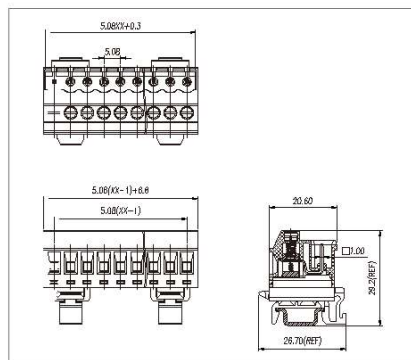

MATERIAL		
Screws	M3.0 Steel Zn plated	
Nut	Brass	
Conductor	Brass, Sn plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

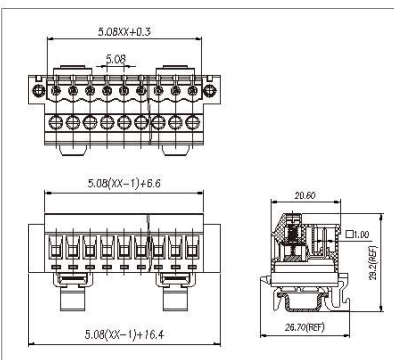

MATERIAL		
Screws	M3.0 Steel Zn plated	
Conductor	Brass, Sn plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7-8mm	

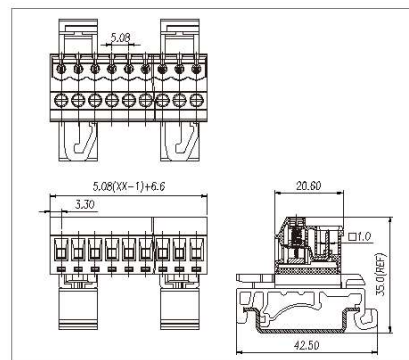



Pitch:5.08mm

WJ2EDGUVKM-5.08

CERTIFICATION	.UL.
---------------	-------------



Pitch:5.0/5.08mm

WJ2EDGRK-5.0/5.08

CERTIFICATION	.UL.
---------------	-------------




Pitch:5.0/5.08mm


WJ2EDGRKM-5.0/5.08

CERTIFICATION	.UL.
---------------	-------------


MATERIAL	
Screws	M3.0 Steel Zn plated
Nut	Brass
Conductor	Brass, Sn plated
Cage	Brass, Ni plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 450V
Rated current	15A 20A
Wire range	28~14AWG 2.5mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec
Torque	5.10kgf-cm/0.5Nm/4.43Lbin
Strip length	7~8mm

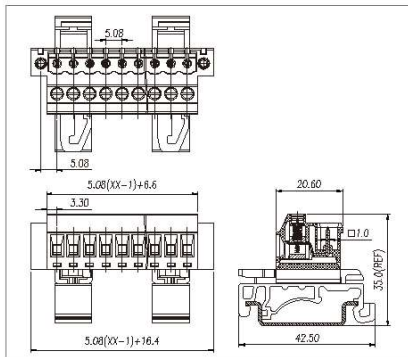

MATERIAL	
Screws	M3.0 Steel Zn plated
Conductor	Brass, Sn plated
Cage	Brass, Ni plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 450V
Rated current	15A 20A
Wire range	28~14AWG 2.5mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec
Torque	5.10kgf-cm/0.5Nm/4.43Lbin
Strip length	7~8mm

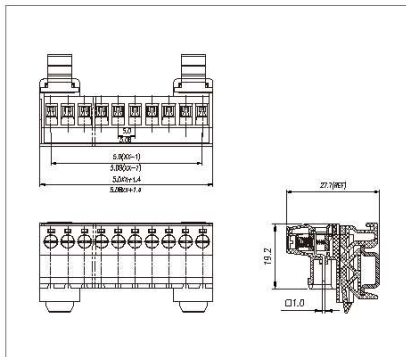

MATERIAL	
Screws	M3.0 Steel Zn plated
Nut	Brass
Conductor	Brass, Sn plated
Cage	Brass, Ni plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 450V
Rated current	15A 20A
Wire range	28~14AWG 2.5mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec
Torque	5.10kgf-cm/0.5Nm/4.43Lbin
Strip length	7~8mm

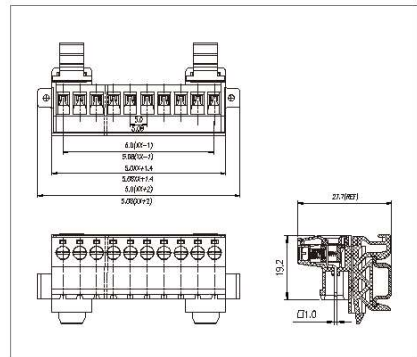

PLUG-IN TERMINAL BLOCK



Pitch:5.0/5.08mm

WJ2EDGURK-5.0/5.08

CERTIFICATION



Pitch:5.0/5.08mm

WJ2EDGURKM-5.0/5.08

CERTIFICATION



Pitch:5.0mm

MODEL: WJ2EDGKP-5.0




CERTIFICATION




MATERIAL		
Screws	M3.0 Steel Zn plated	
Conductor	Brass, Sn plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

MATERIAL			
Screws	M3.0 Steel Zn plated		
Nut	Brass		
Conductor	Brass, Sn plated		
Cage	Brass, Ni plated		
Housing	PA66, UL94V-0		
ELECTRICAL			
Standard	UL	IEC	
Rated voltage	300V	450V	
Rated current	15A	20A	
Wire range	28~14AWG	2.5mm ²	
Contact resistance	20mΩ		
Insulation resistance	500MΩ/DC500V		
Withstanding voltage	AC2000V/1Min		
MECHANICAL			
Temp. range	-40°C~+105°C		
Max. soldering	+250°C for 5 Sec		
Torque	5.10kgf-cm/0.5Nm/4.43Lbin		
Strip length	7~8mm		

MATERIAL		
Screws	M3.0 Steel Zn plated	
Clamp	Phosphor bronze, Ni plated	
Cage	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	20A
Wire range	28~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	7~8mm	

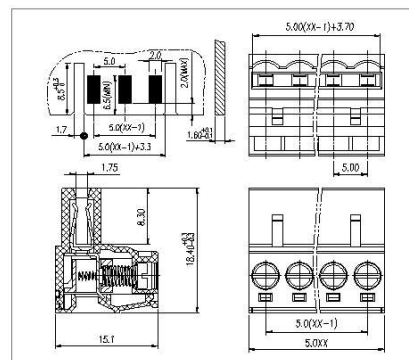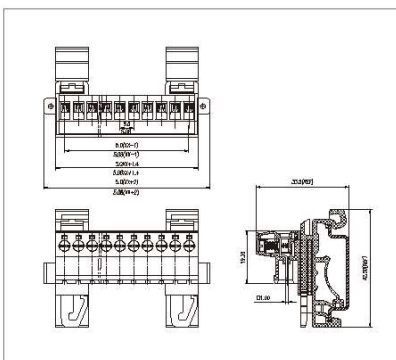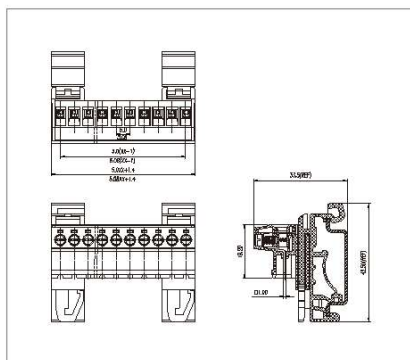

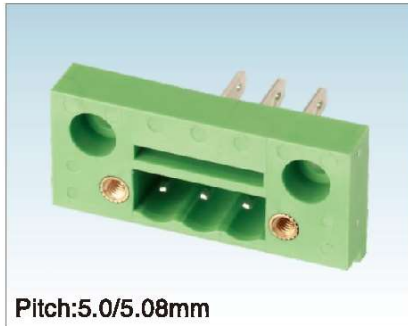

Pitch:5.0/5.08mm

MODEL: WJ2CDGM

CERTIFICATION	
---------------	--



Pitch:3.96mm

MODEL: HT396K

CERTIFICATION	
---------------	--




Pitch:3.96mm


MODEL: HT396V

CERTIFICATION	
---------------	--


MATERIAL		
Nut	M2.5,Brass	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

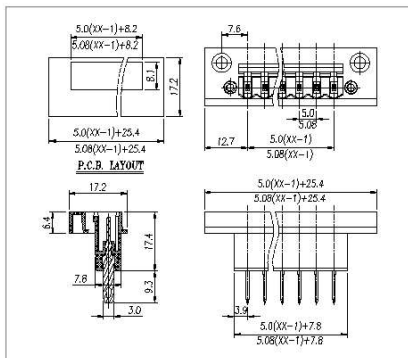

MATERIAL		
Screws	M2.0 Steel Zn plated	
Clamp	Brass, Ni plated	
Shrapnel	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	15A
Wire range	26~16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
Strip length	6~7mm	

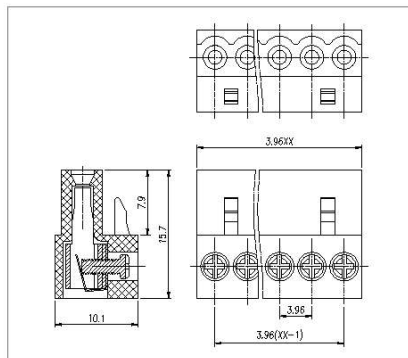

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	15A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

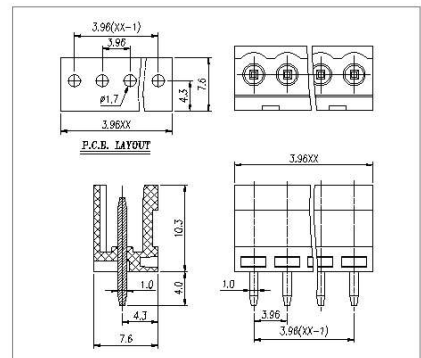

PLUG-IN TERMINAL BLOCK




Pitch:3.96mm

MODEL: HT396R



Pitch:5.08mm

MODEL: HT508K

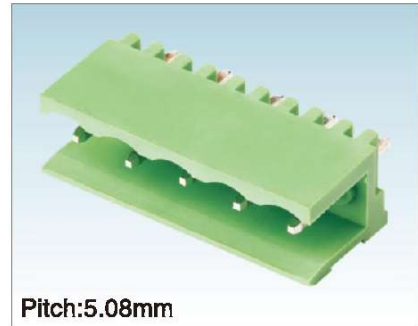




Pitch:5.08mm

MODEL: HT508V

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	15A
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C for 5 Sec	

MATERIAL		
Screws	M2.5 Steel Zn plated	
Clamp	Brass, Ni plated	
Shrapnel	Brass, Ni plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	15A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	
Torque	4.08kgf-cm/0.4Nm/3.54Lbin	
Strip length	6-7mm	

MATERIAL		
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	15A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ for 5 Sec	

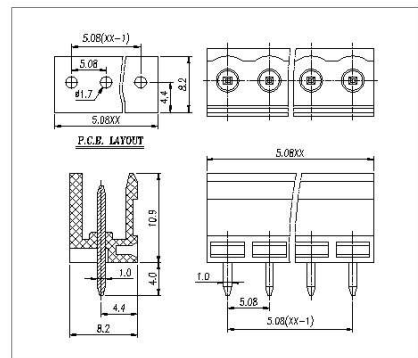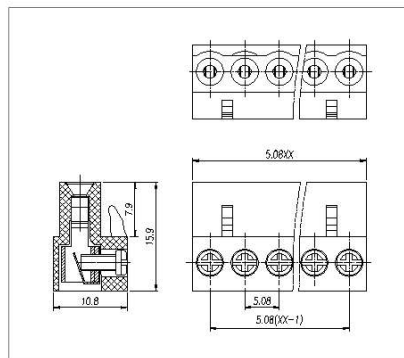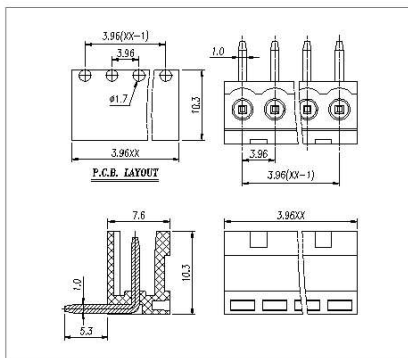



--	--




34 (REF)

1.5



Technical drawing of the 3A20 (REF) component. The drawing includes three views: a top view, a side view, and a cross-sectional view.


- Top View:** Shows a hexagonal base with six mounting tabs. The overall width is dimensioned as 34.20 (REF). The angle between the centerlines of two opposite tabs is dimensioned as 60°.
- Side View:** Shows the profile of the component. The total height is dimensioned as 2.20. The height of the central section is dimensioned as 1.40.
- Cross-sectional View:** Shows the internal structure of the component, including the central bore and the mounting tabs.

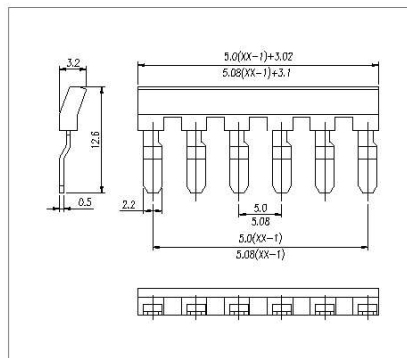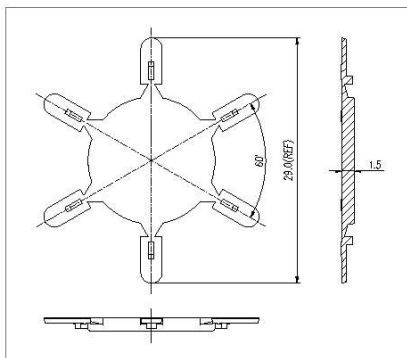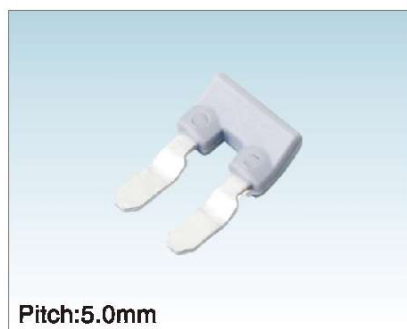

Plug-in Type Product Matched Reference Table


PCB Headers Plugs	WJ15ED GVC-2.5	WJ15EDGV HB-THT-3.50	WJ15EDGV HBM-THT-3.50	WJ15EDGV HBN-THT-3.50	WJ15ED GKR-3.81	WJ15ED GKRM-3.81	WJ15ED GKRN-3.81	WJ15ED GVC-3.5/3.81	WJ15ED GVM-3.5/3.81	WJ15CD GV-3.81	WJ15ED GVT-3.5/3.81	WJ15EDG VTM-3.5/3.81	WJ15ED GVH-3.5/3.81	WJ15EDG VHM-3.5/3.81
	WJ15ED GRC-2.5	WJ15EDGR HB-THT-3.50	WJ15EDGR HBM-THT-3.50	WJ15EDGR HBN-THT-3.50				WJ15ED GRC-3.5/3.81	WJ15ED GRM-3.5/3.81		WJ15ED GRT-3.5/3.81	WJ15EDG RTM-3.5/3.81	WJ15ED GRH-3.5/3.81	WJ15EDG RHM-3.5/3.81
	WJ15ED GVH-2.5													
	WJ15ED GRH-2.5													
WJ15EDGKD-2.5	●													
WJ15EDGKN-3.50		●												
WJ15EDGKN-3.50			●											
WJ15EDGKNM-3.50				●										
WJ15EDGK-3.5/3.81					●			●			●		●	
WJ15EDGKM-3.5/3.81							●		●	●		●		●
WJ15EDGKA-3.81					●			●			●		●	
WJ15EDGKAM-3.81							●		●	●		●		●
WJ15EDGKB-3.81					●			●			●		●	
WJ15EDGKBM-3.81							●		●	●		●		●
WJ15EDGKC-3.81					●			●			●		●	
WJ15EDGKCM-3.81							●		●	●		●		●
WJ15EDGKD-3.5/3.81					●			●			●		●	
WJ15EDGKDM-3.5/3.81							●		●	●		●		●
WJ15EDGA-3.81					●									
WJ15EDGB-3.81					●									
WJ15EDGAM-3.81						●				●				
WJ15EDGBM-3.81						●				●				
WJ2EDGK-5.0/5.08														
WJ2EDGK-7.50/7.62														
WJ2EDGK-10.0/10.16														
WJ2EDGKM-5.0/5.08														
WJ2EDGKM-7.50/7.62														
WJ2EDGKM-10.0/10.16														
WJ2EDGKA-5.0/5.08														
WJ2EDGKA-7.50/7.62														
WJ2EDGKAM-5.0/5.08														
WJ2EDGKAM-7.50/7.62														
WJ2EDGKB-5.0/5.08														
WJ2EDGKB-7.50/7.62														
WJ2EDGKBM-5.0/5.08														
WJ2EDGKBM-7.50/7.62														
WJ2EDGKC-5.0/5.08														
WJ2EDGKCM-5.0/5.08														
WJ2EDGKD-5.08														
WJ2EDGKDM-5.08														
WJ2EDGKF-5.0														
WJ2EDGKZ-5.0/5.08														
WJ2EDGKL-5.0/5.08														
WJ2EDGKLM-5.0/5.08														
WJ2EDGA-5.08														
WJ2EDGAM-5.08														
WJ2EDGB-5.08														
WJ2EDGBM-5.08														
HT396K-3.96														
HT508K-5.08														

[illegible]

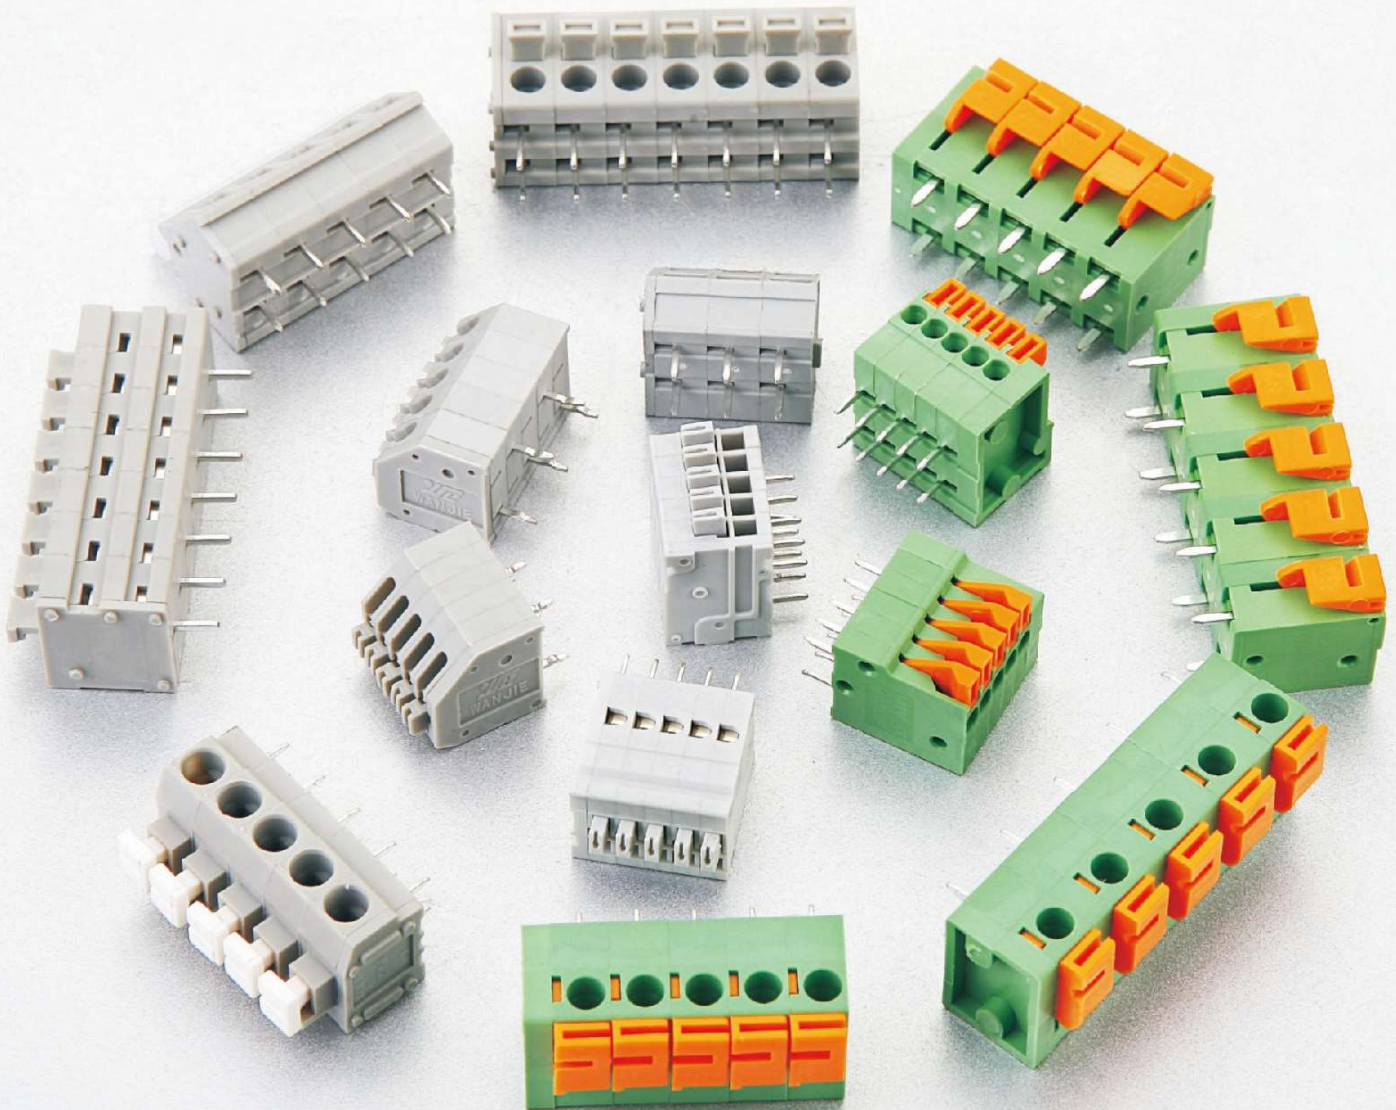

PCB SPRING TERMINAL BLOCK

PCB Spring terminal blocks, available with two connection methods cage clamp contact and dish clamp contact. Provide the wire size from 0.08mm² to 10mm², Available with different pitches from 2.54mm to 10.0mm. It can be used instead of printed circuit universal screw terminal blocks, more flexible. The product is designed in accordance with IEC 60998, UL1059, CSA C22.2 NO. 158 standards.

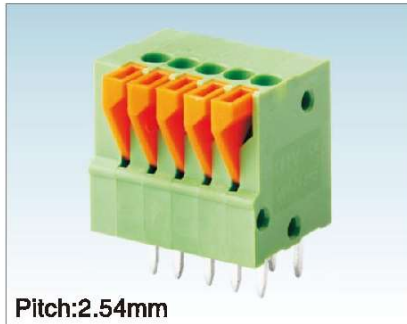

Pitch:2.54mm

MODEL: WJ141V


CERTIFICATION	UL CE
---------------	--------------



Pitch:2.54mm

MODEL: WJ141R

CERTIFICATION	UL CE
---------------	--------------

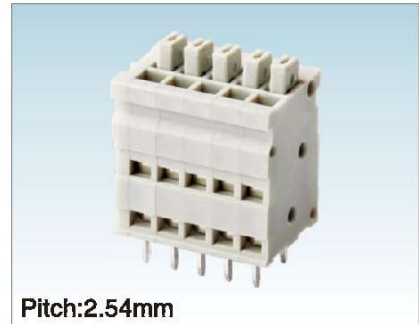

Pitch:2.54mm




MODEL: WJ211V-2.54

CERTIFICATION	UL
---------------	-----------

MATERIAL	
Wire guard	Stainless steel
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	150V 130V
Rated current	2A 6A
Wire range	26-18AWG 1.0mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC1300V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C 5 Sec
Strip length	9-10mm

MATERIAL	
Wire guard	Stainless steel
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	150V 130V
Rated current	2A 6A
Wire range	26-18AWG 1.0mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC1300V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C 5 Sec
Strip length	9-10mm

MATERIAL	
Wire guard	Stainless steel
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	150V 130V
Rated current	5A 6A
Wire range	26-18AWG 1.0mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC1300V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C 5 Sec
Strip length	9-10mm

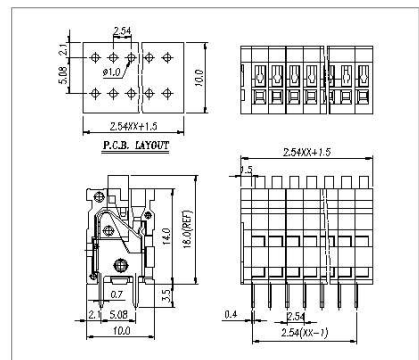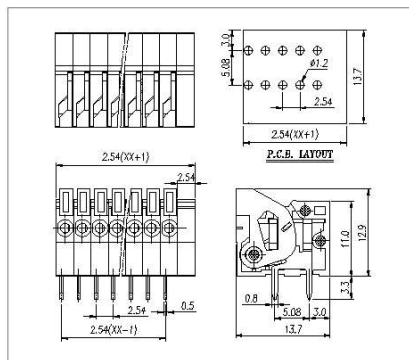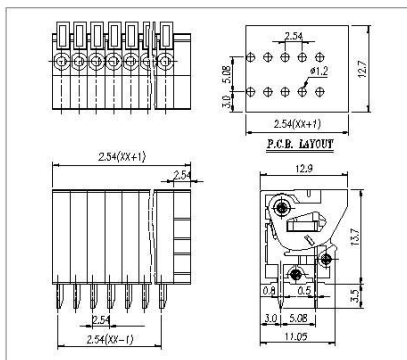



Pitch:2.54mm

MODEL: WJ211R-2.54


CERTIFICATION	
---------------	--



Pitch:5.0mm

MODEL: WJ211V-5.0

CERTIFICATION	
---------------	--

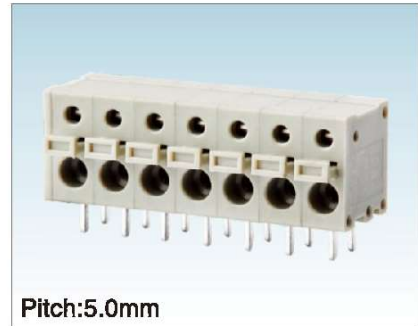

Pitch:5.0mm




MODEL: WJ211R-5.0


CERTIFICATION	
---------------	--

MATERIAL		
Wire guard	Stainless steel	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	150V	130V
Rated current	5A	6A
Wire range	26-18AWG	1.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω /DC500V	
Withstanding voltage	AC1300V/1 Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Strip length	9-10mm	

MATERIAL		
Wire guard	Stainless steel	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	15A
Wire range	26-18AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Strip length	8-9mm	

MATERIAL		
Wire guard	Stainless steel	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	15A
Wire range	26-18AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Strip length	8-9mm	

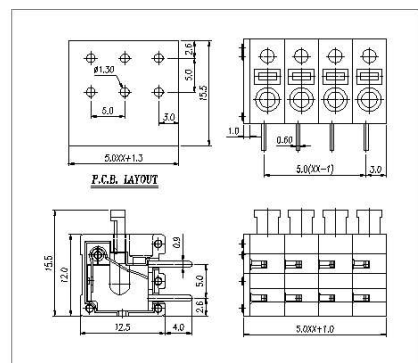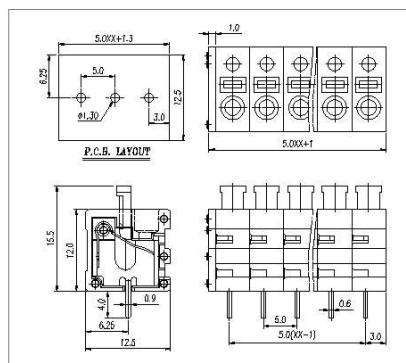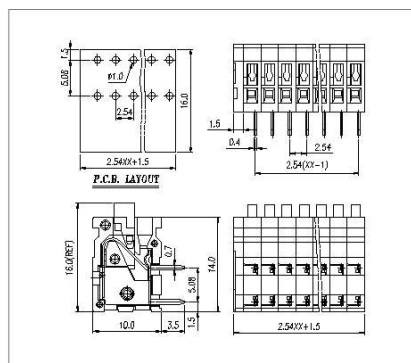


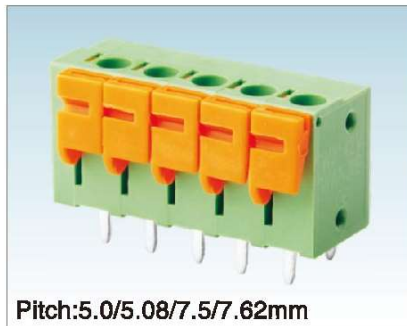

Pitch: 5.0/5.08/7.5/7.62mm

MODEL: WJ142V

CERTIFICATION	.F.R.
---------------	-------

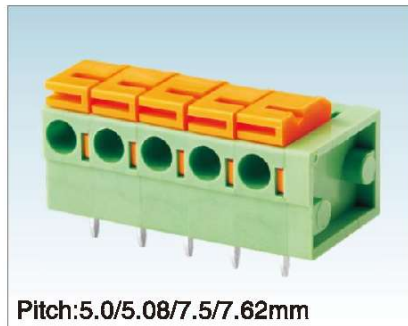

Pitch: 5.0/5.08/7.5/7.62mm

MODEL: WJ142R

CERTIFICATION	.F.R.
---------------	-------



Pitch: 3.81/5.0/7.5/10.0mm




MODEL: WJ235A

CERTIFICATION	
---------------	--

MATERIAL		
Wire guard	Stainless steel	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	15A
Wire range	22-18AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Strip length	9-10mm	

MATERIAL		
Wire guard	Stainless steel	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	15A
Wire range	22-16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Strip length	9-10mm	

MATERIAL		
Wire guard	Stainless steel	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	5A	15A
Wire range	22-18AWG	1.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Strip length	9-10mm	

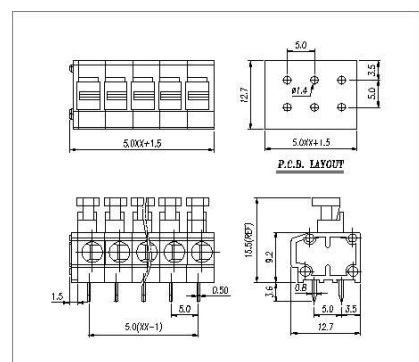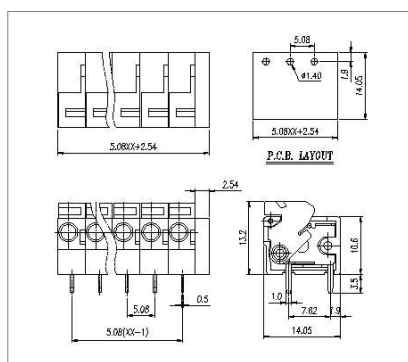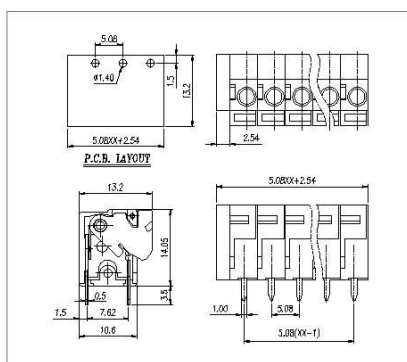

PCB SPRING TERMINAL BLOCK



Pitch: 3.81/5.0/7.5/10.0mm

MODEL: WJ235B

CERTIFICATION	
---------------	--



Pitch: 2.5mm

MODEL: WJ250-2.5

CERTIFICATION	UL CE
---------------	-------




Pitch: 3.5mm


MODEL: WJ250-3.5

CERTIFICATION	UL CE
---------------	-------


MATERIAL		
Wire guard	Stainless steel	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	5A	16A
Wire range	22-18AWG	1.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC200V/1Min	
MECHANICAL		
Temp. range	-40°C ~ +105°C	
Max. soldering	+250°C 5 Sec	
Strip length	9-10mm	

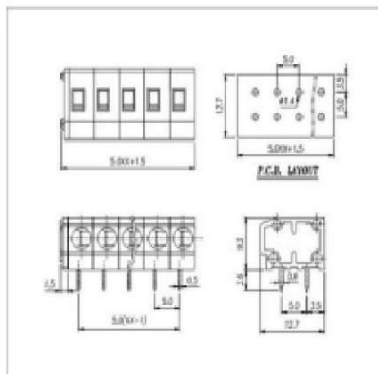

MATERIAL		
Pin header	Phosphor bronze, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	4A	6A
Wire range	28-20AWG	0.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C ~ +105°C	
Max. soldering	+250°C 5 Sec	
Strip length	9-10mm	

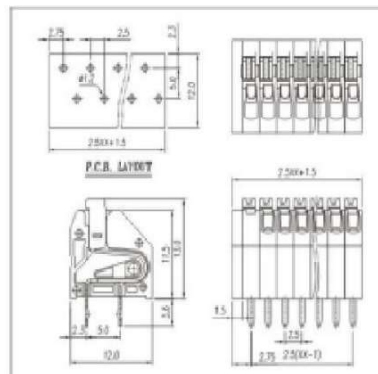

MATERIAL		
Pin header	Phosphor bronze, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	7A	8A
Wire range	26-16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Strip length	9-10mm	

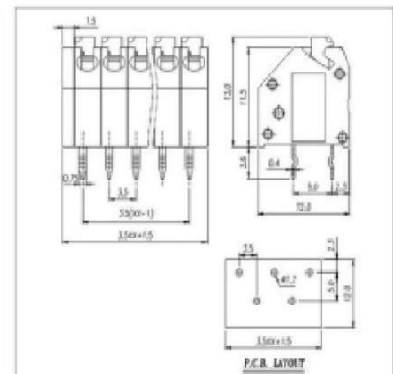




Pitch: 3.81/5.0/7.5mm

MODEL: WJ236

CERTIFICATION

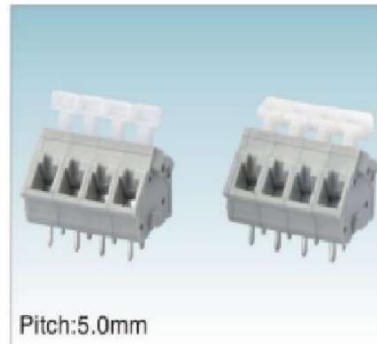

Pitch: 5.0mm

MODEL: WJ243A

CERTIFICATION



Pitch: 5.0/5.08/7.5/7.62mm




MODEL: WJ245-5.0/5.08/7.5/7.62


CERTIFICATION

MATERIAL		
Wire guard	Stainless steel	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	12A
Wire range	22-16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2900V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Strip length	9-10mm	

MATERIAL		
Wire guard	Stainless steel	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	15A
Wire range	26-14AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	
Strip length	5-6mm	


MATERIAL		
Wire guard	Stainless steel	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V=0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	15A
Wire range	26~14AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Strip length	5~6mm	

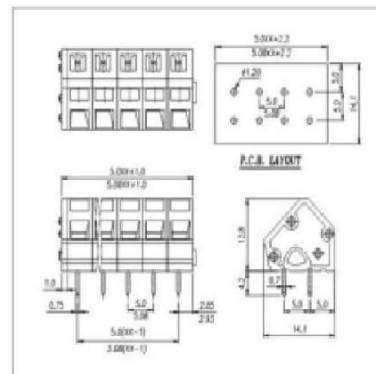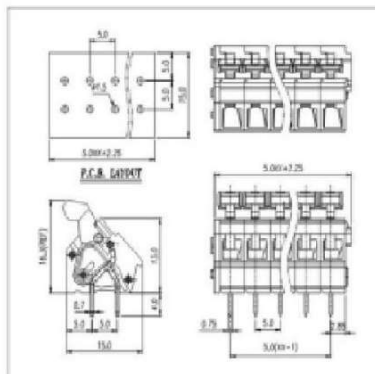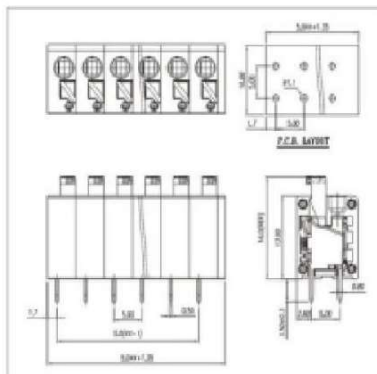

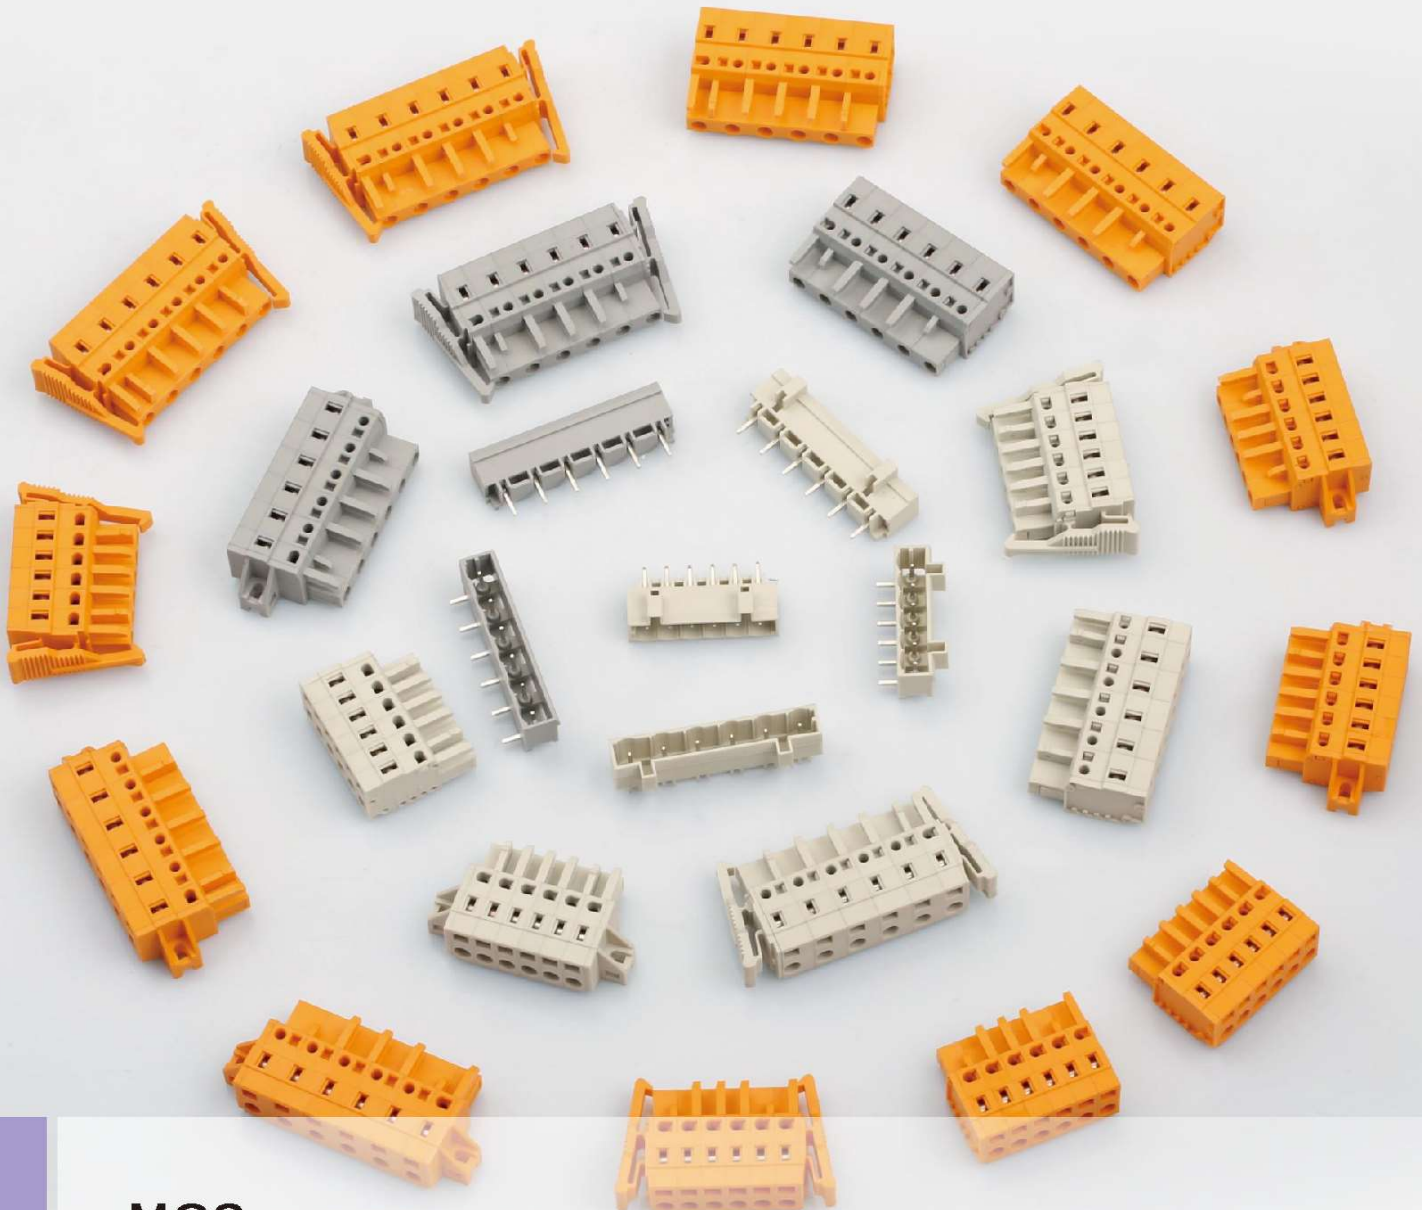

MCS TERMINAL BLOCK


The MCS terminal Block uses elastic steel with metallic bending technology, thus the clamp can hold the wire tightly without loosening. The advantage of using a clamp greatly decreases wiring time, provides ant vibration, low maintenance and high reliability. Our design can be matched with many of our accessories. Coding is used to make wiring easy. A strain relief is provided to help secure the plug into the socket, providing better reliability from disconnecting. We offer pitches: 2.5mm up to 7.62mm and Pole sizes : 2P up to 24 P. The product is designed in accordance with IEC 60998, UL1069, CSA22.2NO.158 standards.

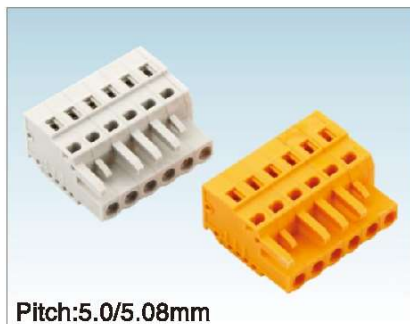

Pitch:5.0/5.08mm

MODEL: WJ0401/0501-01XX

CERTIFICATION	.F.
---------------	------------

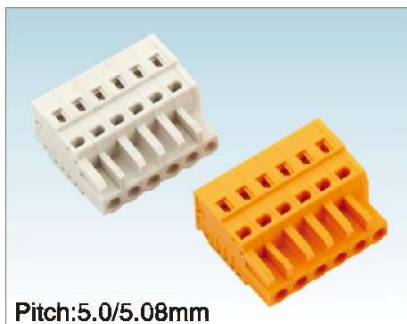

Pitch:5.0/5.08mm

MODEL: WJ0401/0501-02XX

CERTIFICATION	.F.
---------------	------------



Pitch:5.0/5.08mm




MODEL: WJ0401/0501-03XX

CERTIFICATION	.F.
---------------	------------

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C--+105°C	
Strip length	8-9mm	

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

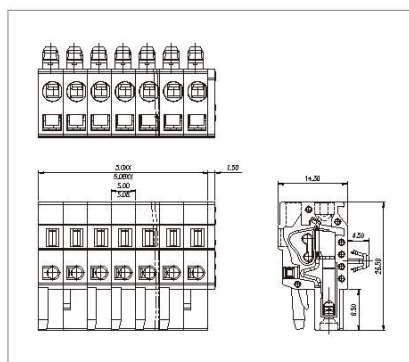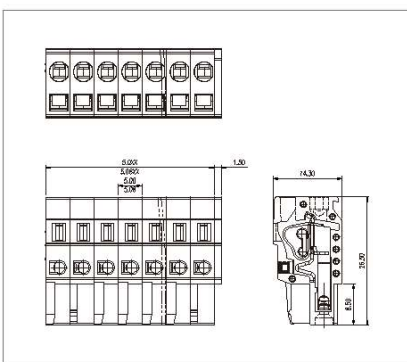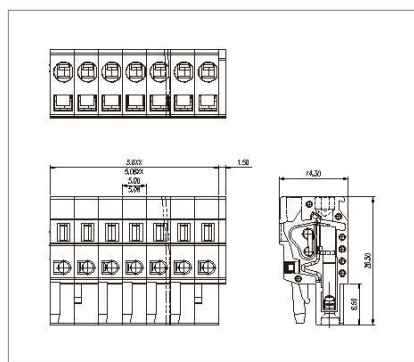

MCS TERMINAL BLOCK



Pitch: 5.0/5.08mm

MODEL: WJ0401/0501-04XX

CERTIFICATION	
---------------	--



Pitch: 5.0/5.08mm

MODEL: WJ0401/0501-05XX

CERTIFICATION	
---------------	--



Pitch: 5.0/5.08mm




MODEL: WJ0401/0501-06XX

CERTIFICATION	
---------------	--

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

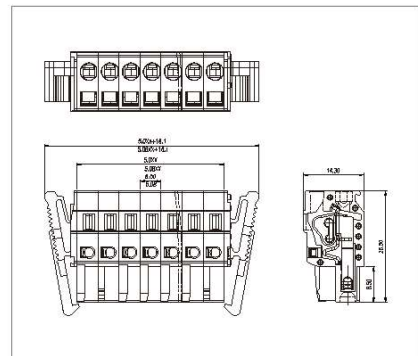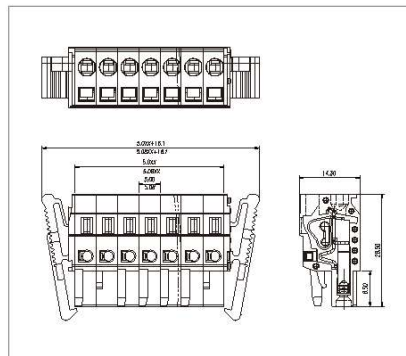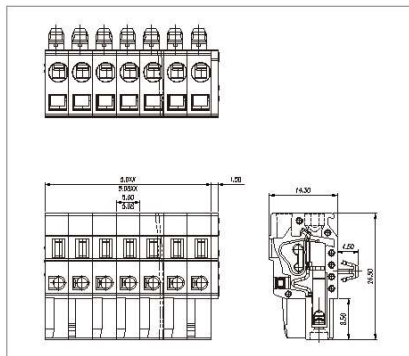



Pitch:5.0/5.08mm

MODEL: WJ0401/0501-07XX

CERTIFICATION	.R.
---------------	-----



Pitch:5.0/5.08mm

MODEL: WJ0401/0501-08XX

CERTIFICATION	.R.
---------------	-----



Pitch:7.5/7.62mm




MODEL: WJ0601/0701-01XX

CERTIFICATION	.R.
---------------	-----

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.6mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃--+105℃	
Strip length	8-9mm	

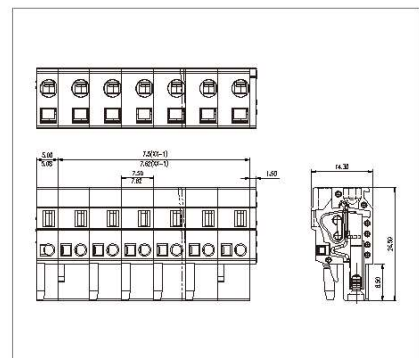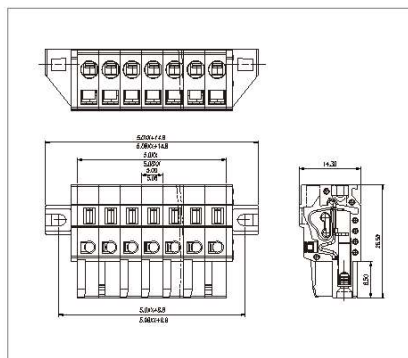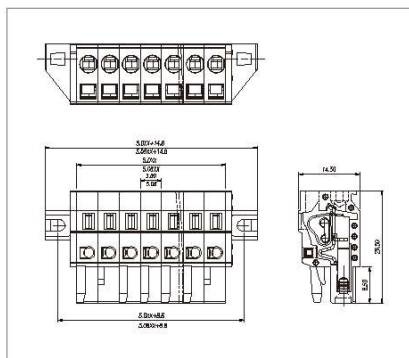



Pitch:7.5/7.62mm

MODEL: WJ0601/0701-02XX

CERTIFICATION	
---------------	--



Pitch:7.5/7.62mm

MODEL: WJ0601/0701-03XX

CERTIFICATION	
---------------	--



Pitch:7.5/7.62mm




MODEL: WJ0601/0701-04XX

CERTIFICATION	
---------------	--

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~-+105℃	
Strip length	8-9mm	

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

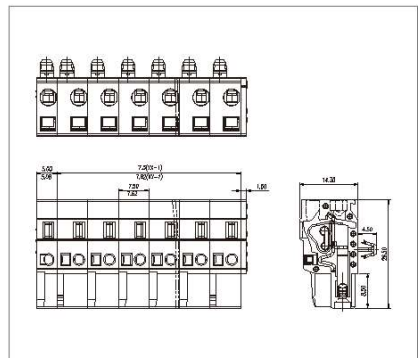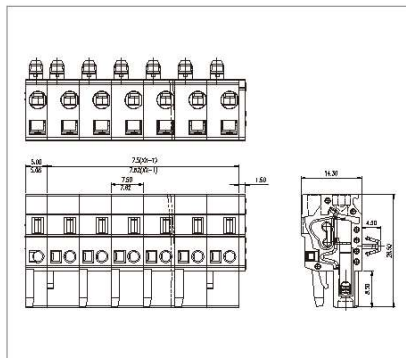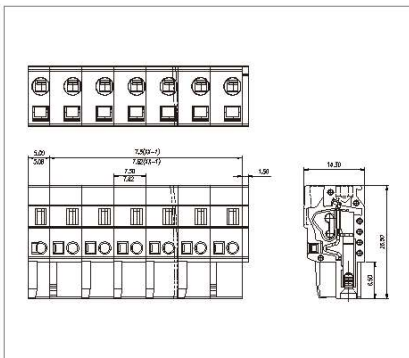



Pitch:7.5/7.62mm

MODEL: WJ0601/0701-05XX

CERTIFICATION	.R.
---------------	-----



Pitch:7.5/7.62mm

MODEL: WJ0601/0701-06XX

CERTIFICATION	.R.
---------------	-----



Pitch:7.5/7.62mm




MODEL: WJ0601/0701-07XX

CERTIFICATION	.R.
---------------	-----

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃--+105℃	
Strip length	8-9mm	

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~-+105℃	
Strip length	8-9mm	

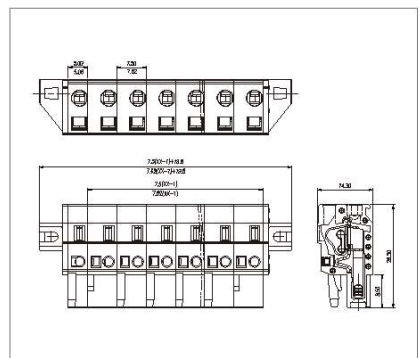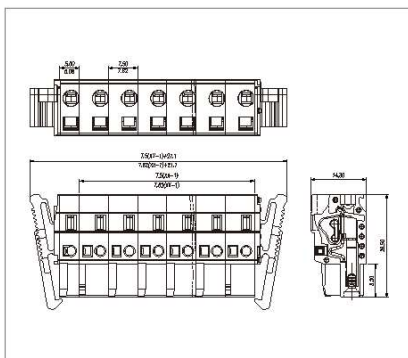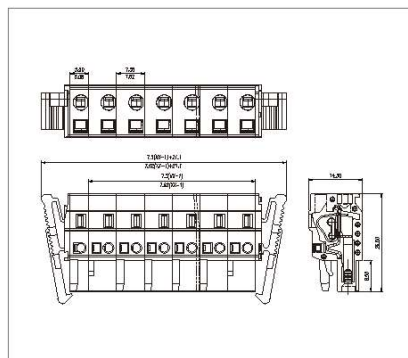



Pitch:7.5/7.62mm

MODEL: WJ0601/0701-08XX

CERTIFICATION	
---------------	--



Pitch:5.0/5.08mm

MODEL: WJ0402/0502-01XX

CERTIFICATION	
---------------	--



Pitch:5.0/5.08mm




MODEL: WJ0402/0502-02XX


CERTIFICATION	
---------------	--

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22~14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8~9mm	

MATERIAL		
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	

MATERIAL		
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	

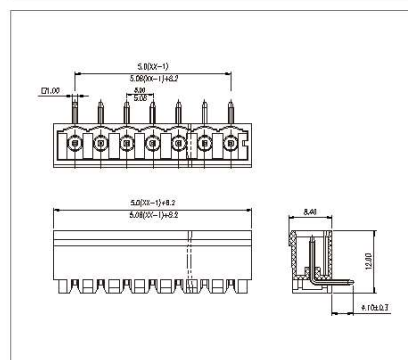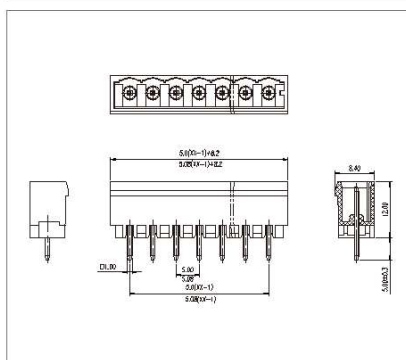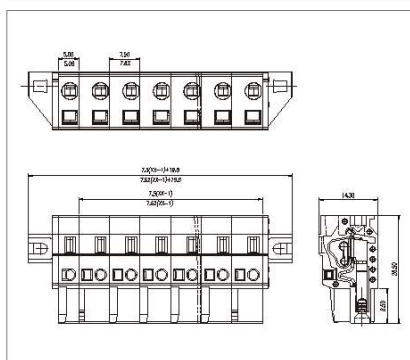


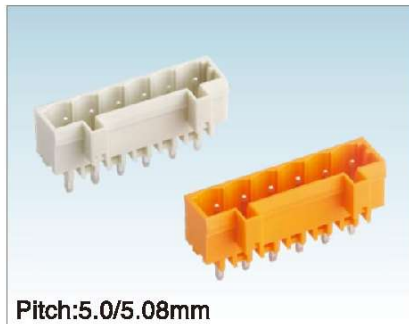

Pitch:5.0/5.08mm

MODEL: WJ0402/0502-05XX


CERTIFICATION	UL
---------------	----

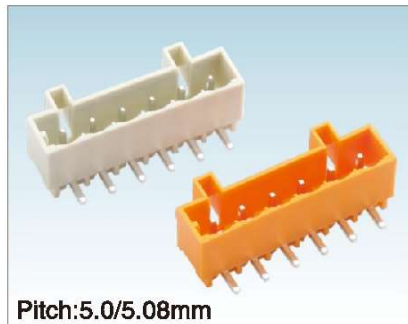

Pitch:5.0/5.08mm

MODEL: WJ0402/0502-06XX

CERTIFICATION	UL
---------------	----

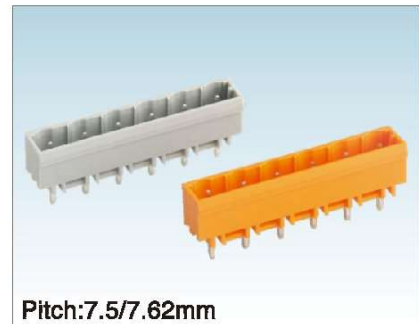

Pitch:7.5/7.62mm




MODEL: WJ0602/0702-01XX


CERTIFICATION	UL
---------------	----

MATERIAL		
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Contact resistance	20 mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	

MATERIAL		
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	

MATERIAL		
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	16A	16A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	

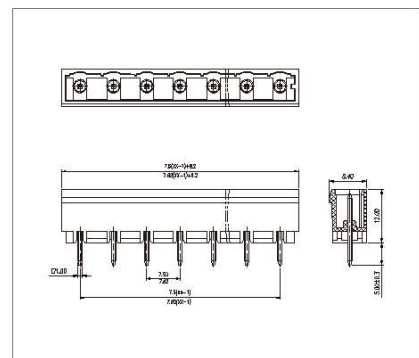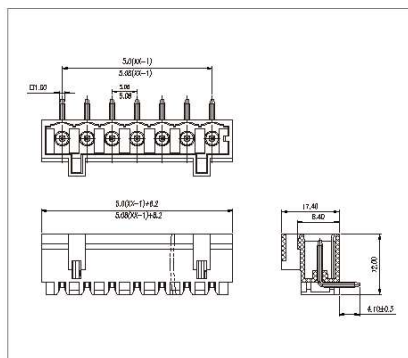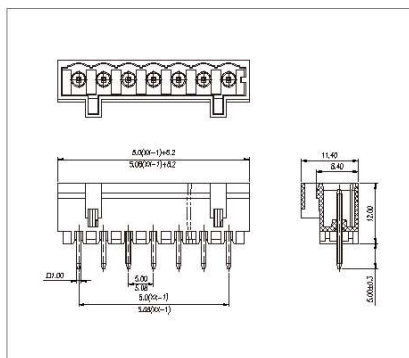


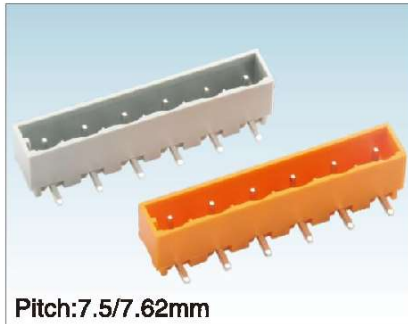

Pitch:7.5/7.62mm

MODEL: WJ0602/0702-02XX


CERTIFICATION	
---------------	--

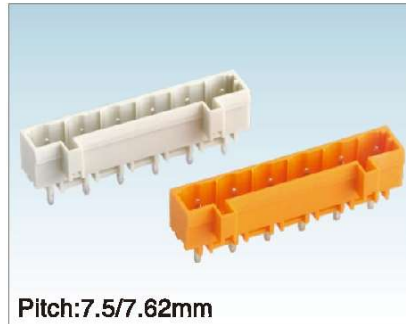

Pitch:7.5/7.62mm

MODEL: WJ0602/0702-05XX

CERTIFICATION	
---------------	--

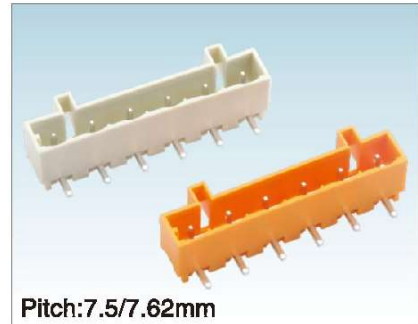

Pitch:7.5/7.62mm




MODEL: WJ0602/0702-06XX

CERTIFICATION	
---------------	--

MATERIAL		
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	

MATERIAL		
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Max. soldering	+250°C 5 Sec	

MATERIAL		
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Contact resistance	20m Ω	
Insulation resistance	500M Ω /DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	

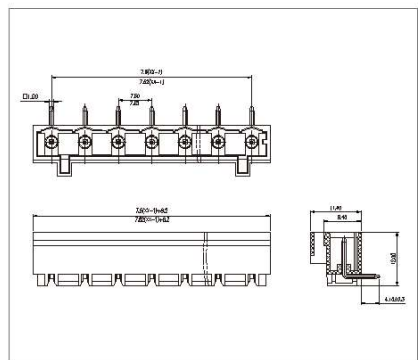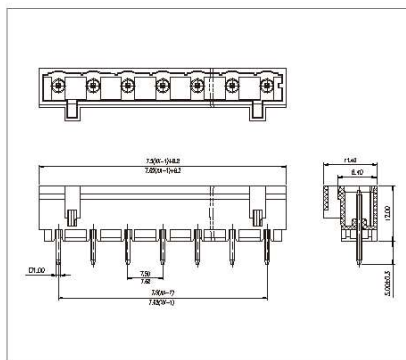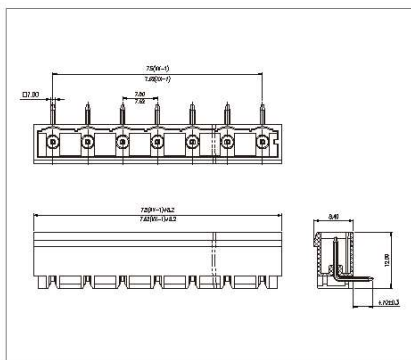





Pitch:5.0/5.08mm

Pitch:5.0/5.08mm

CERTIFICATION	
----------------------	--

MATERIAL		
Wire guard		Stainless steel
Conductor		Copper alloy, Sn plated
Housing		PA66, UL94V-0
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22~14AWG	2.5mm ²
Contact resistance		20mΩ
Insulation resistance		500MΩ/DC500V
Withstanding voltage		AC2000V/1Min
MECHANICAL		
Temp. range		-40°C~+105°C
Strip length		8~9mm

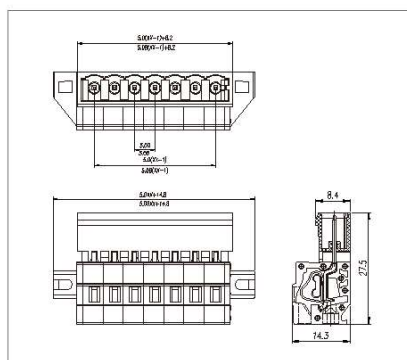

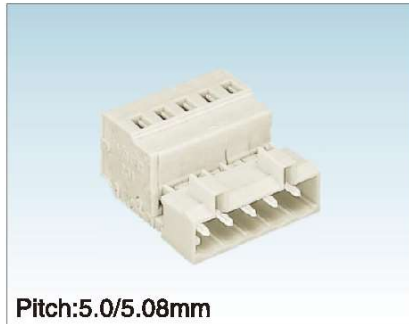

Pitch:5.0/5.08mm

MODEL: WJ0403/0503-04XX


CERTIFICATION



Pitch:5.0/5.08mm

MODEL: WJ0403/0503-05XX

CERTIFICATION

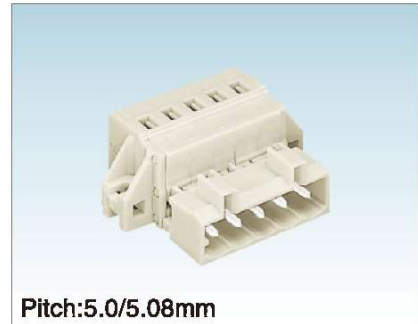

Pitch:5.0/5.08mm




MODEL: WJ0403/0503-06XX

CERTIFICATION

MATERIAL		
Wire guard	Stainless steel	
Conductor	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Wire guard	Stainless steel	
Conductor	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Wire guard	Stainless steel	
Conductor	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20m Ω	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

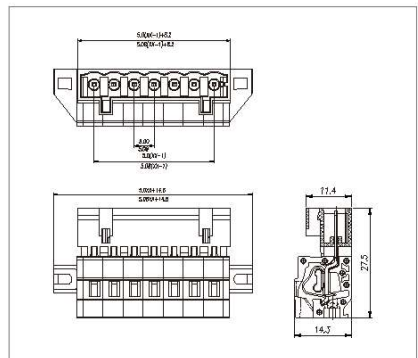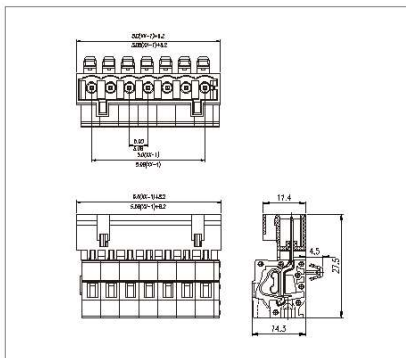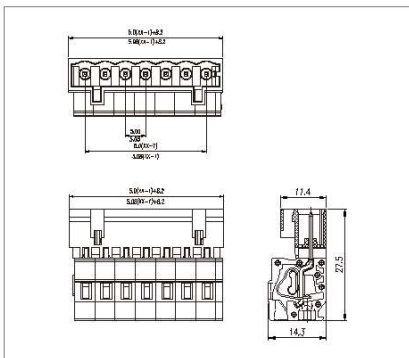



Pitch:7.5/7.62mm

MODEL: WJ0603/0703-01XX

CERTIFICATION



Pitch:7.5/7.62mm

MODEL: WJ0603/0703-02XX

CERTIFICATION



Pitch:7.5/7.62mm




MODEL: WJ0603/0703-03XX


CERTIFICATION

MATERIAL		
Wire guard	Stainless steel	
Conductor	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Wire guard	Stainless steel	
Conductor	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Wire guard	Stainless steel	
Conductor	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

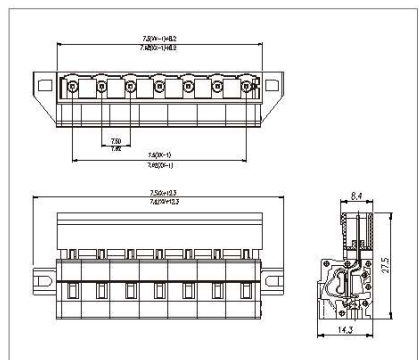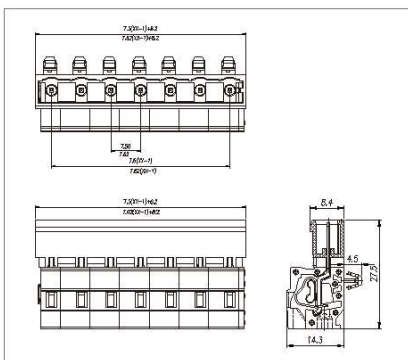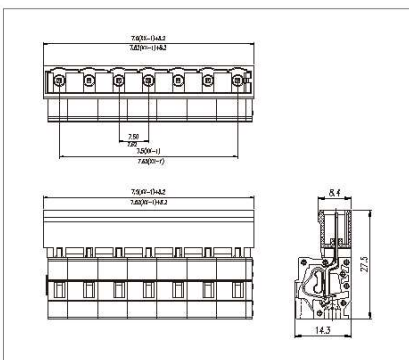

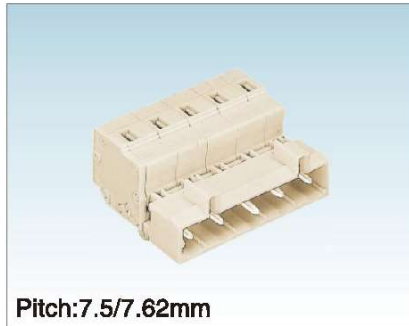

Pitch: 7.5/7.62mm

MODEL: WJ0603/0703-04XX

CERTIFICATION



Pitch: 7.5/7.62mm

MODEL: WJ0603/0703-05XX

CERTIFICATION



Pitch: 7.5/7.62mm




MODEL: WJ0603/0703-06XX

CERTIFICATION

MATERIAL		
Wire guard	Stainless steel	
Conductor	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Wire guard	Stainless steel	
Conductor	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~-+105℃	
Strip length	8-9mm	

MATERIAL		
Wire guard	Stainless steel	
Conductor	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

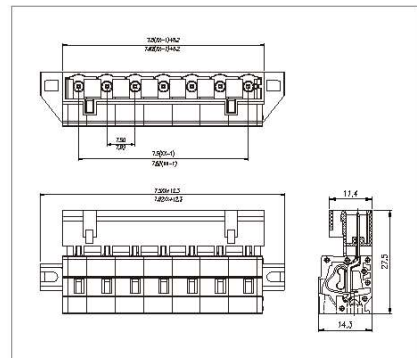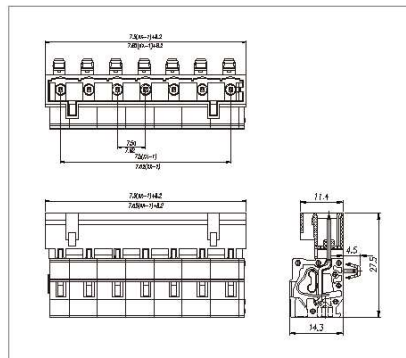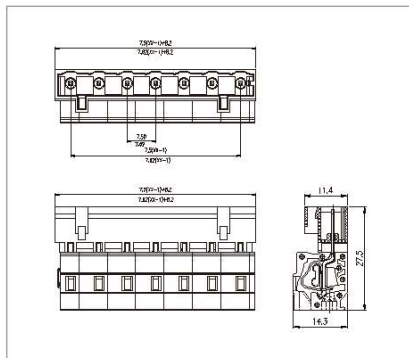



Pitch:5.0/5.08mm

MODEL: WJ0404/0504-01XX

CERTIFICATION



Pitch:5.0/5.08mm

MODEL: WJ0404/0504-02XX

CERTIFICATION



Pitch:5.0/5.08mm




MODEL: WJ0404/0504-03XX

CERTIFICATION

MATERIAL		
Wire guard	Stainless steel	
Pin header	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	260V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Strip length	8-9mm	

MATERIAL		
Wire guard	Stainless steel	
Pin header	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Wire guard	Stainless steel	
Pin header	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	260V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

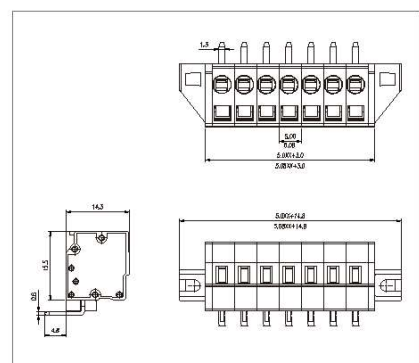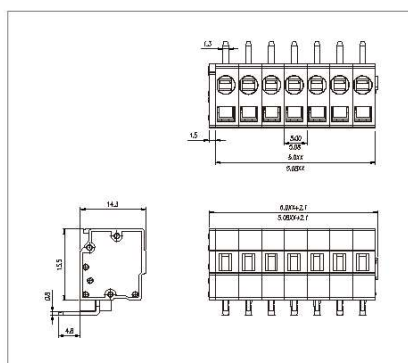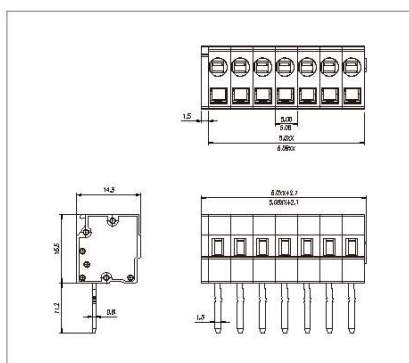



Pitch:5.0/5.08mm

MODEL: WJ0404/0504-04XX



Pitch:7.5/7.62mm

MODEL: WJ0604/0704-01XX






Pitch:7.5/7.62mm

MODEL: WJ0604/0704-02XX

MATERIAL		
Wire guard		Stainless steel
Pin header		Copper alloy, Sn plated
Housing		PA66, UL94V-0
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance		20mΩ
Insulation resistance		500MΩ/DC500V
Withstanding voltage		AC2000V/1Min
MECHANICAL		
Temp. range		-40°C~+105°C
Strip length		8-9mm

MATERIAL	
Wire guard	Stainless steel
Pin header	Copper alloy, Sn plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	15A 16A
Wire range	22-14AWG 2.5mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Strip length	8-9mm


MATERIAL		
Wire guard		Stainless steel
Pin header		Copper alloy, Sn plated
Housing		PA66, UL94V-0
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	18A
Wire range	22-14AWG	2.5mm ²
Contact resistance		20mΩ
Insulation resistance		500MΩ/DC500V
Withstanding voltage		AC2000V/1Min
MECHANICAL		
Temp. range		-40°C~+105°C
Strip length		8-9mm

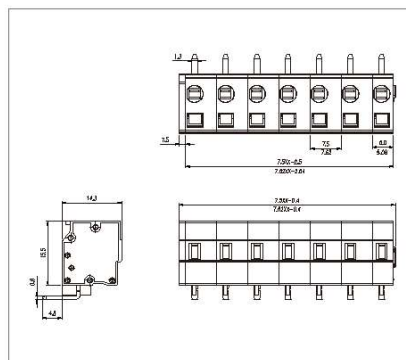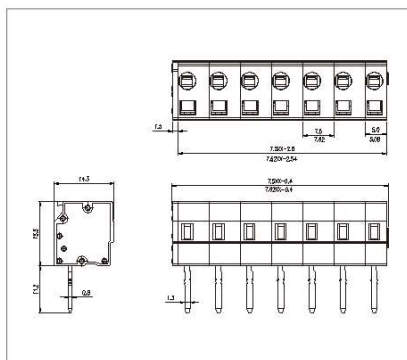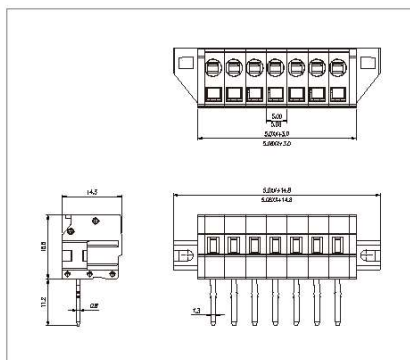





Pitch: 7.5/7.62mm

MODEL: WJ0604/0704-03XX




Pitch: 7.5/7.62mm

MODEL: WJ0604/0704-04XX

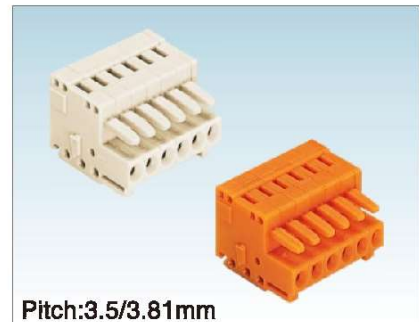

Pitch: 3.5/3.81mm




MODEL: WJ0201/0301-01XX



MATERIAL		
Wire guard	Stainless steel	
Pin header	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Wire guard	Stainless steel	
Pin header	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	16A
Wire range	22-14AWG	2.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	8-9mm	

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	130V
Rated current	10A	10A
Wire range	26-14AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC1500V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	7-8mm	

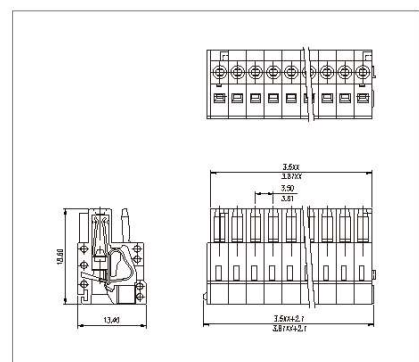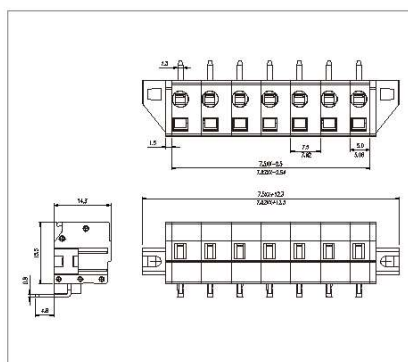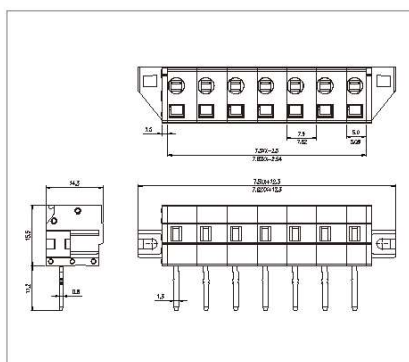




Pitch:3.5/3.81mm

MODEL: WJ0201/0301-02XX


CERTIFICATION

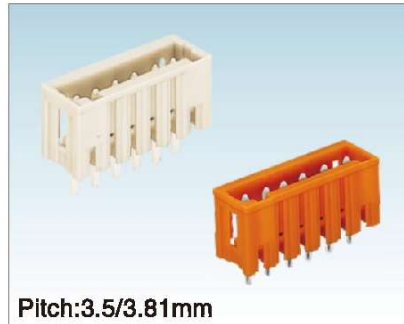

Pitch:3.5/3.81mm

MODEL: WJ0202/0302-01XX

CERTIFICATION

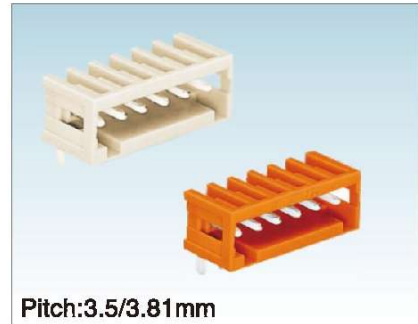

Pitch:3.5/3.81mm




MODEL: WJ0202/0302-02XX

CERTIFICATION

MATERIAL		
Shrapnel	Stainless steel	
Clamp	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	130V
Rated current	10A	10A
Wire range	26-14AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC1500V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	7-8mm	

MATERIAL		
Pin header	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	130V
Rated current	10A	10A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC1500V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
瞬时温度	+250℃ 5 Sec	

MATERIAL		
Pin header	Copper alloy, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	130V
Rated current	10A	10A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC1500V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
瞬时温度	+250℃ 5 Sec	

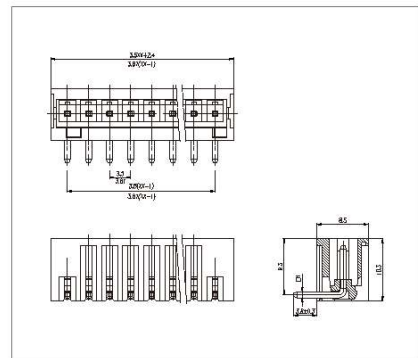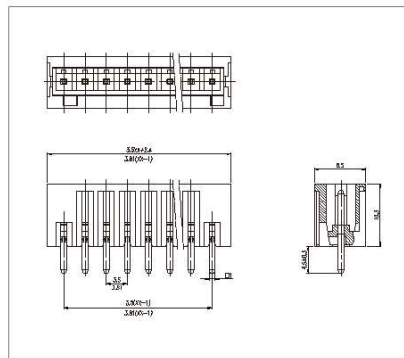
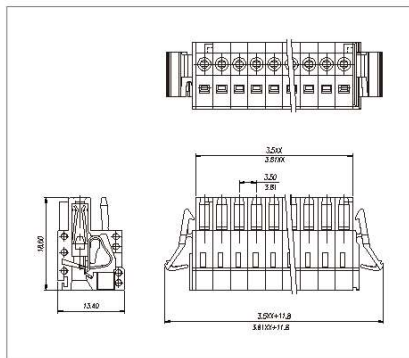




MODEL: WJT01



MODEL: WJG01

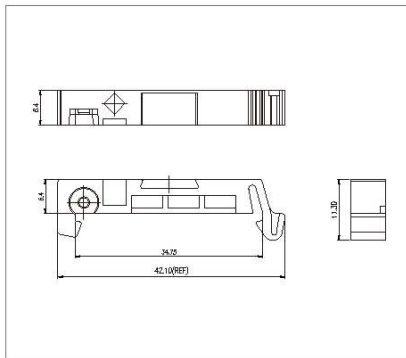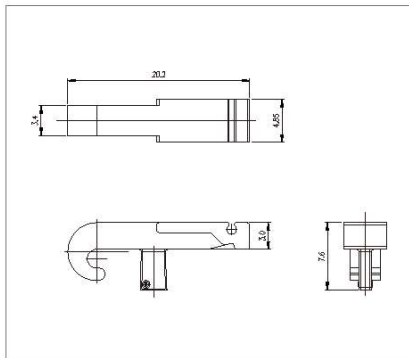

[illegible]

[illegible]



FEED THROUGH TERMINAL BLOCK

Feed through terminal blocks, connecting with two conductors easily and credibility, Provide the wire size from 0.5mm² to 10mm², Available with different pitches from 8.2mm to 14.5mm, Available for with fuse and without fuse. The product is designed in accordance with IEC 60998, UL1059, CSA C22.2 NO.158 standards.

MODEL: MY__HS

CERTIFICATION	
Base: Flat-bottom Screws: Steel, Zn plated Clamp: Cladded copper strips, Zn plated Housing material: PA66, UL94V-2 Temp. range: -40°C~+105°C Poles available: 2-12P	



Model	mm²	UL		ICE		Screw	Unit	Dimensions(mm/in)					
								A	B	C	D	E	F
MY8HS+0	0.5-4.0	300V	20A	450V	24A	M2.6x5	mm	96.0	17.80	14.30	8.20	3.00	3.0x3.4
MY10HS+0	1.0-6.0	300V	26A	750V	24A	M3.0x6	mm	116.7	20.00	15.70	10.00	3.50	3.6x3.7

MODEL: MY__HS+1.2

CERTIFICATION	
Base: With 1.2mm elevated base Screws: Steel, Zn plated Clamp: Cladded copper strips, Zn plated Housing material: PA66, UL94V-2 Temp. range: -40°C~+105°C Poles available: 2-12P	



Model	mm²	UL		ICE		Screw	Unit	Dimensions(mm/in)					
								A	B	C	D	E	F
MY8HS+1.2	0.5-4.0	300V	20A	450V	24A	M2.6x5	mm	96.0	17.80	15.50	8.20	3.00	3.0x3.4
MY10HS+1.2	1.0-6.0	300V	26A	750V	24A	M3.0x6	mm	116.7	20.00	16.90	10.00	3.50	3.6x3.7


MODEL: MY__HS+4.3

CERTIFICATION	
Base: With 4.3mm elevated base Screws: Steel, Zn plated Clamp: Cladded copper strips, Zn plated Housing material: PA66, UL94V-2 Temp. range: -40°C~+105°C Poles available: 2-12P	



Model	mm²	UL		ICE		Screw	Unit	Dimensions(mm/in)					
								A	B	C	D	E	F
MY8HS+4.3	0.5-4.0	300V	20A	450V	24A	M2.6x5	mm	96.0	17.80	18.60	8.20	3.00	3.0x3.4
MY10HS+4.3	1.0-6.0	300V	26A	750V	24A	M3.0x6	mm	116.5	20.00	20.00	10.00	3.50	3.6x3.7


MODEL: MY_H

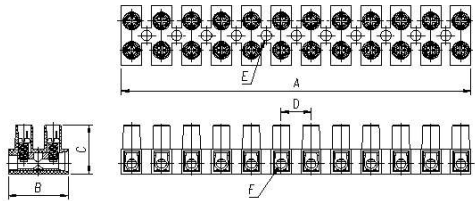CERTIFICATION	
Base: Flat-bottom Screws: Steel, Zn plated Clamp: Brass, Ni plated Housing material: PA66, UL94V-2 Temp. range: -40°C~+105°C Poles available: 2-12P	
	



Model	mm²	UL		ICE		Screw	Dimensions(mm/in)						
							Unit	A	B	C	D	E	F
MY8H+0	1.5	300V	17.5A	450V	24A	M2.6x5	mm	94.0	17.0	13.00	8.00	3.00	2.80
MY10H+0	2.5	300V	28A	750V	24A	M3.0x6	mm	116.7	20.3	16.00	10.00	3.50	3.20
MY12H+0	6.0	600V	41A	750V	45A	M3.5x7	mm	139.7	24.0	17.80	12.00	3.90	3.90
MY16H+0	10.0	600V	57A	750V	60A	M4.0x9	mm	171.3	32.0	23.80	14.60	4.40	4.80


MODEL: MY_H+1.2

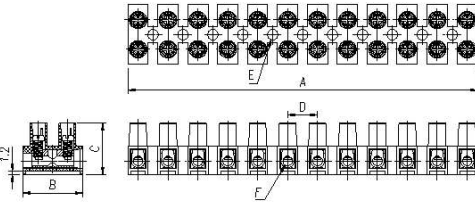CERTIFICATION	
Base: With 1.2mm elevated base Screws: Steel, Zn plated Clamp: Brass, Ni plated Housing material: PA66, UL94V-2 Temp. range: -40°C~+105°C Poles available: 2-12P	
	



Model	mm²	UL		ICE		Screw	Dimensions(mm/in)						
							Unit	A	B	C	D	E	F
MY8H+1.2	1.5	300V	17.5A	450V	24A	M2.6x5	mm	94.0	17.0	14.20	8.00	3.00	2.80
MY10H+1.2	2.5	300V	28A	750V	24A	M3.0x6	mm	116.7	20.3	17.20	10.00	3.50	3.20
MY12H+1.2	6.0	600V	41A	750V	45A	M3.5x7	mm	139.7	24.0	19.00	12.00	3.90	3.90
MY16H+1.2	10.0	600V	57A	750V	60A	M4.0x9	mm	171.3	32.0	25.00	14.60	4.40	4.80

MODEL: MY_H+4.3

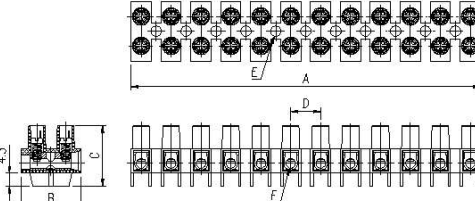CERTIFICATION	
Base: With 4.3mm elevated base Screws: Steel, Zn plated Clamp: Brass, Ni plated Housing material: PA66, UL94V-2 Temp. range: -40°C~+105°C Poles available: 2-12P	
	



Model	mm²	UL		ICE		Screw	Dimensions(mm/in)						
							Unit	A	B	C	D	E	F
MY8H+4.3	1.5	300V	17.5A	450V	24A	M2.6x5	mm	94.0	17.0	17.30	8.20	3.00	2.80
MY10H+4.3	2.5	300V	28A	750V	24A	M3.0x6	mm	116.7	20.3	20.30	10.00	3.50	3.20
MY12H+4.3	6.0	600V	41A	750V	45A	M3.5x7	mm	139.7	24.0	22.10	12.00	3.90	3.90
MY16H+4.3	10.0	600V	57A	750V	60A	M4.0x9	mm	171.3	32.0	28.10	14.60	4.40	4.80

MODEL: MY__HW

带弹片 Wire Protector

CERTIFICATION	
	Base: Flat-bottom Screws: Steel Ni plated Clamp: Brass, Ni plated Shrapnel: Phosphor bronze, Ni plated Housing material: PA66, UL94V-2 Temp. range: -40°C~+105°C Poles available: 2-12P



Model	mm²	UL		ICE		Screw	Unit	Dimensions(mm/in)					
								A	B	C	D	E	F
MY8HW+0	1.5	300V	17.5A	450V	24A	M2.6x5	mm	94.0	17.0	13.00	8.00	3.00	2.80
MY10HW+0	2.5	300V	28A	750V	24A	M3.0x6	mm	116.7	20.3	16.00	10.00	3.50	3.20
MY12HW+0	6.0	600V	41A	750V	45A	M3.5x7	mm	139.7	24.0	17.80	12.00	3.90	3.90
MY16HW+0	10.0	600V	57A	750V	60A	M4.0x9	mm	171.3	32.0	23.80	14.80	4.40	4.80

MODEL: MY__HW+1.2

带弹片 Wire Protector

CERTIFICATION	
	Base: With 1.2mm elevated base Screws: Steel Ni plated Clamp: Brass, Ni plated Shrapnel: Phosphor bronze, Ni plated Housing material: PA66, UL94V-2 Temp. range: -40°C~+105°C Poles available: 2-12P



Model	mm²	UL		ICE		Screw	Unit	Dimensions(mm/in)					
								A	B	C	D	E	F
MY8HW+1.2	1.5	300V	17.5A	450V	24A	M2.6x5	mm	94.0	17.0	14.20	8.00	3.00	2.80
MY10HW+1.2	2.5	300V	28A	750V	24A	M3.0x6	mm	116.7	20.3	17.20	10.00	3.50	3.20
MY12HW+1.2	6.0	600V	41A	750V	45A	M3.5x7	mm	139.7	24.0	19.00	12.00	3.90	3.90
MY16HW+1.2	10.0	600V	57A	750V	60A	M4.0x9	mm	171.3	32.0	25.00	14.80	4.40	4.80


MODEL: MY__HW+4.3

带弹片 Wire Protector

CERTIFICATION	
	Base: With 4.3mm elevated base Screws: Steel Ni plated Clamp: Brass, Ni plated Shrapnel: Phosphor bronze, Ni plated Housing material: PA66, UL94V-2 Temp. range: -40°C~+105°C Poles available: 2-12P



Model	mm²	UL		ICE		Screw	Unit	Dimensions(mm/in)					
								A	B	C	D	E	F
MY8HW+4.3	1.5	300V	17.5A	450V	24A	M2.6x5	mm	94.0	17.0	17.30	8.00	3.00	2.80
MY10HW+4.3	2.5	300V	28A	750V	24A	M3.0x6	mm	116.7	20.3	20.30	10.00	3.50	3.20
MY12HW+4.3	6.0	600V	41A	750V	45A	M3.5x7	mm	139.7	24.0	22.10	12.00	3.90	3.90
MY16HW+4.3	10.0	600V	57A	750V	60A	M4.0x9	mm	171.3	32.0	28.10	14.80	4.40	4.80

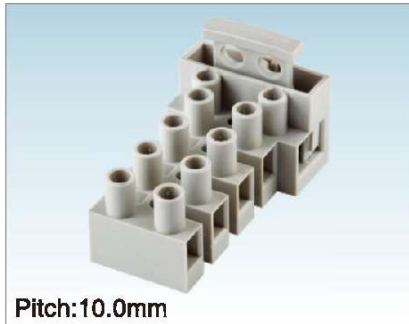


Pitch:10.0mm


MODEL: MY510

CERTIFICATION







MATERIAL	
Screws	M3.0 Steel Zn plated
Shrapnel	Phosphor bronze, Ni plated
Clamp	Brass, Ni plated
Housing	PA66, UL94V-0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	6.3A 6.3A
Wire range	22-14AWG 2.5mm ²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C
Torque	5.10kgf-cm/0.5Nm/4.43Lbin
Strip length	5-6mm

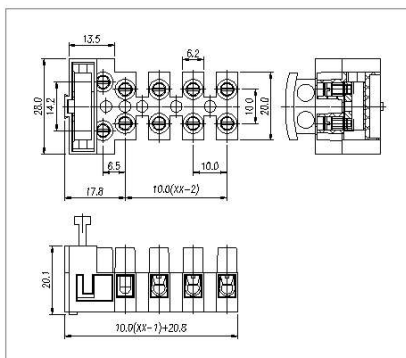

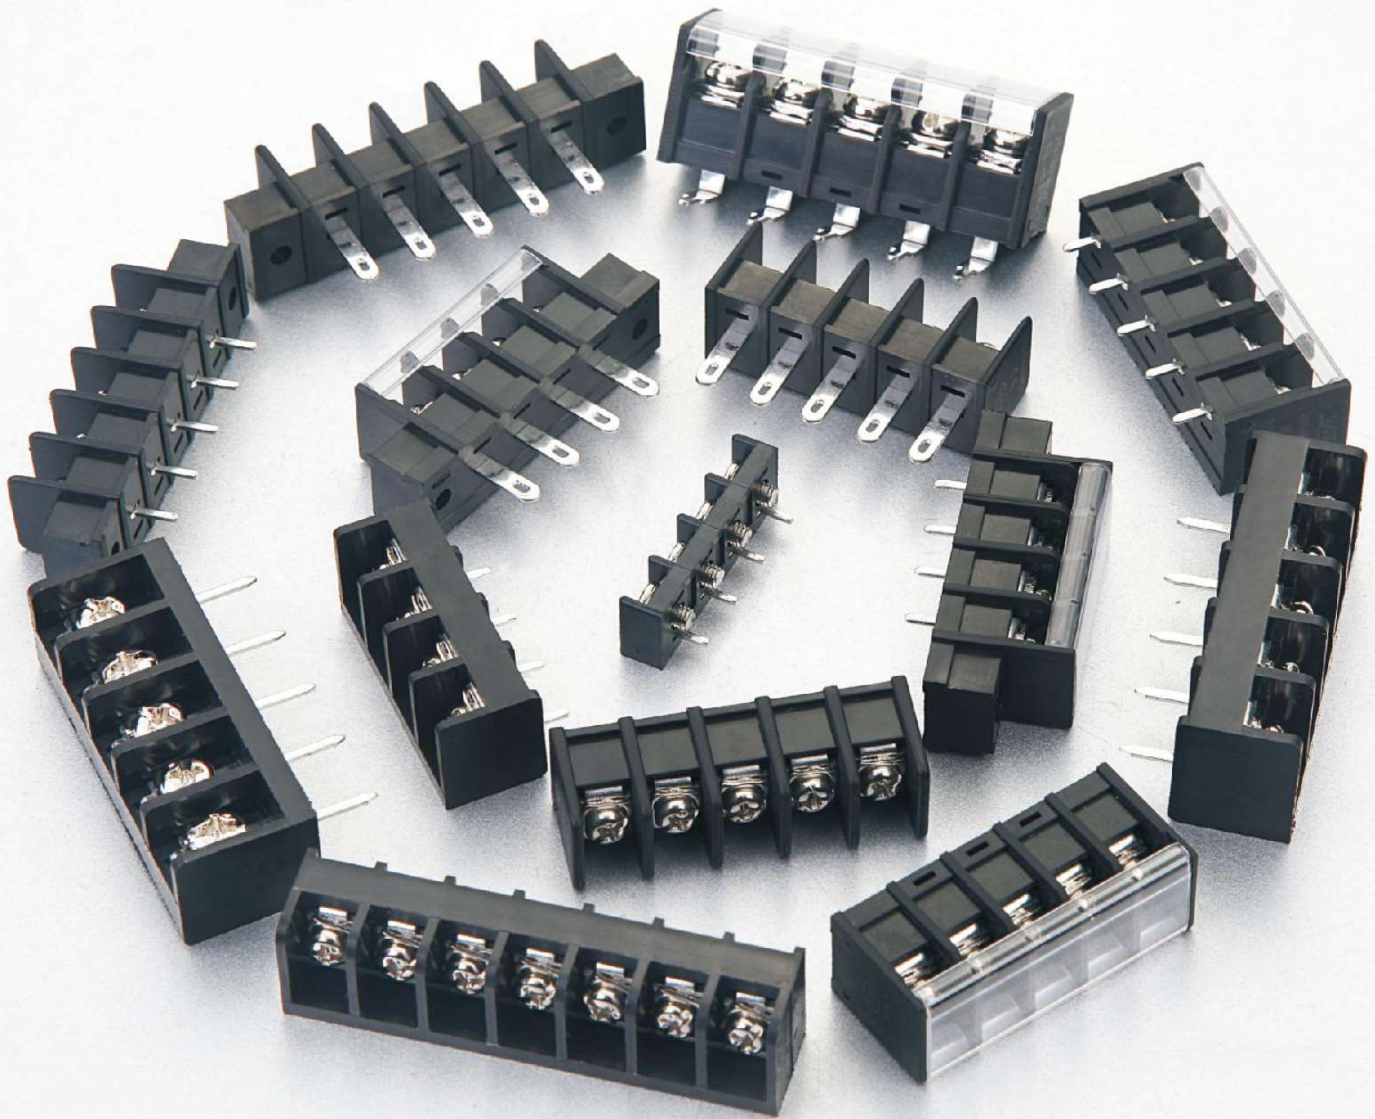

BARRIER TERMINAL BLOCK

Barrier terminal blocks, connecting easily, provide the size from 0.5mm² to 6.0mm², Available with different pitches from 6.35mm to 14.0mm. with cover and without cover. The product is designed in accordance with IEC 60998, UL1059, CSA C22.2 NO.158 standards.

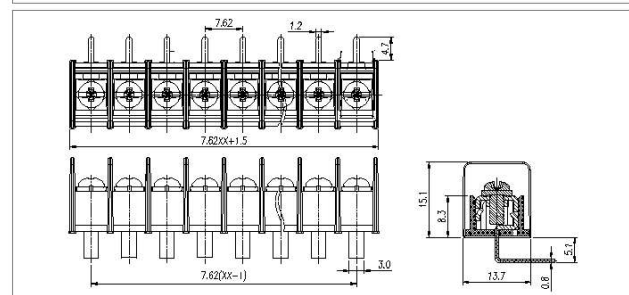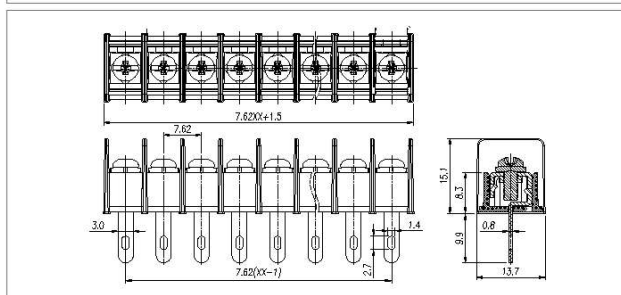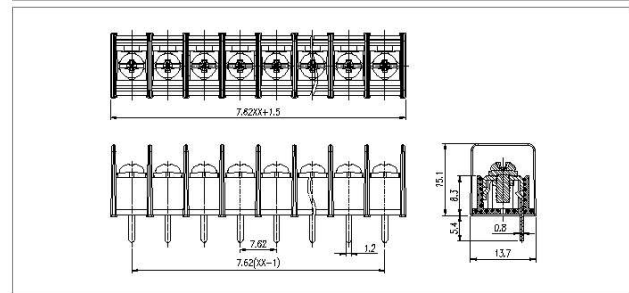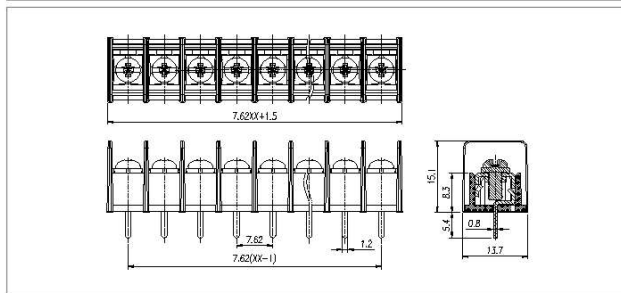


MATERIAL	
Screws	M3.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0


ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	




MODEL: WJ25CM

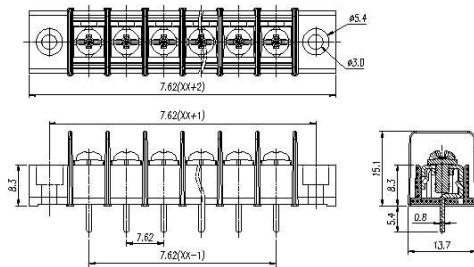


MODEL: WJ25SM

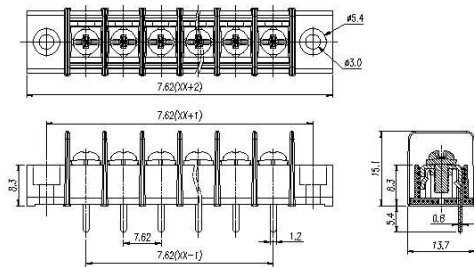

MODEL: WJ25HM




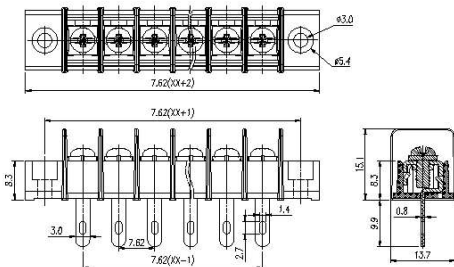


MODEL: WJ25RM

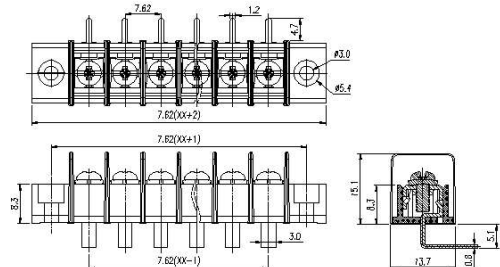

MATERIAL	
Screws	M3.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	

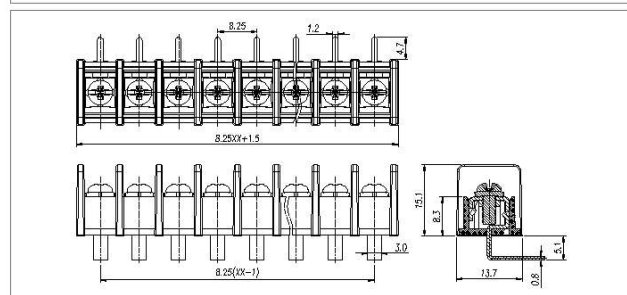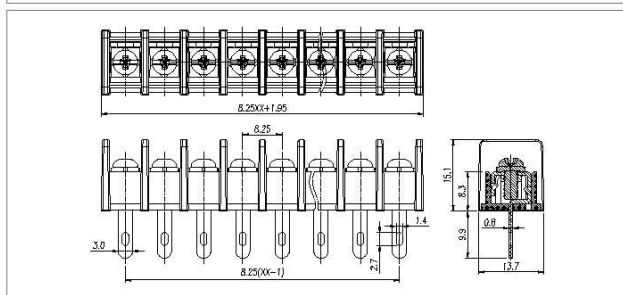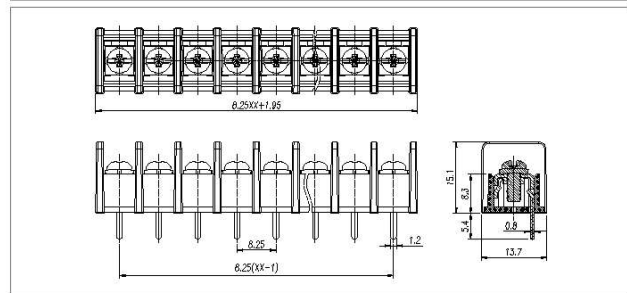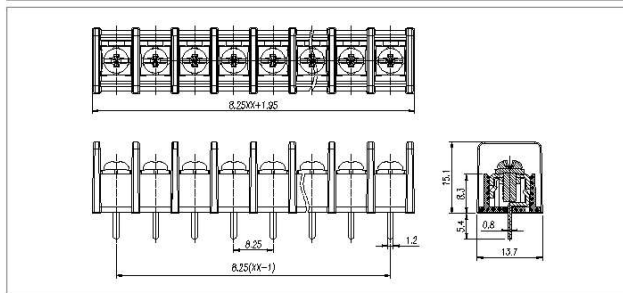


MATERIAL	
Screws	M3.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0


ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	




MODEL: WJ35CM

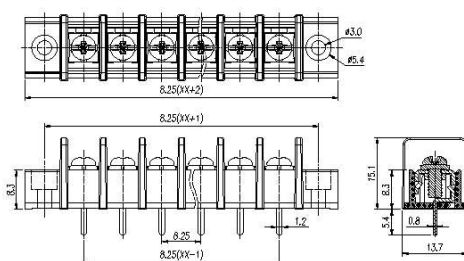


MODEL: WJ35SM

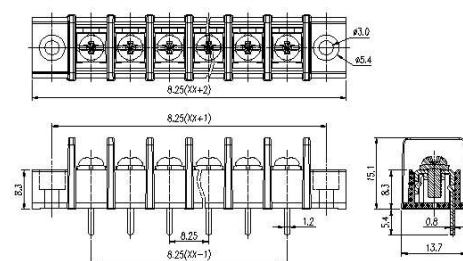

MODEL: WJ35HM




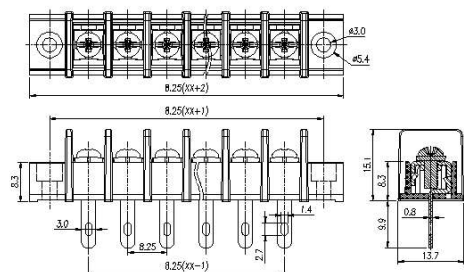


MODEL: WJ35RM

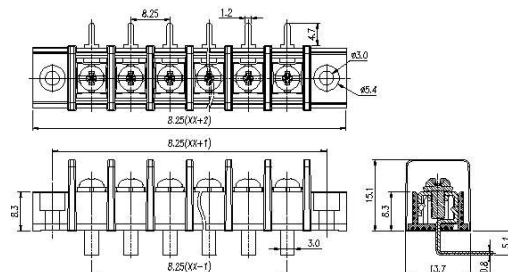

MATERIAL	
Screws	M3.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	

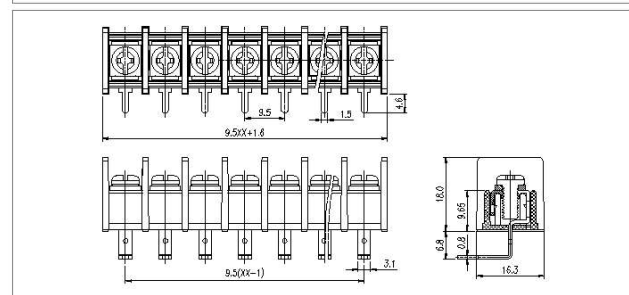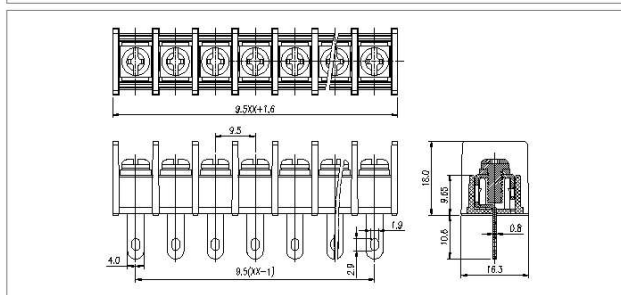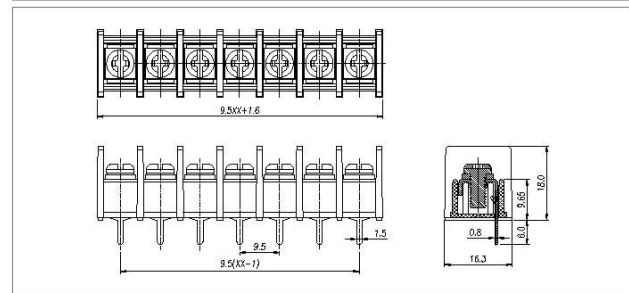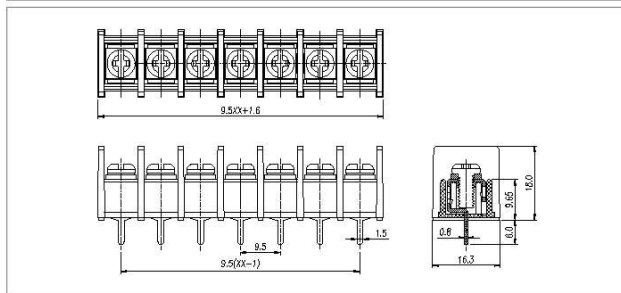


MATERIAL	
Screws	M4.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0


ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	




MODEL: WJ45CM

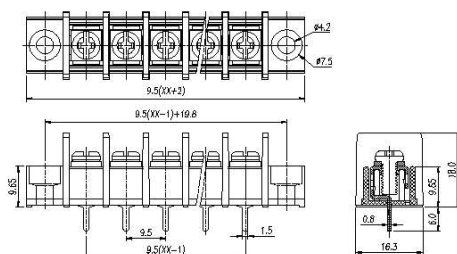


MODEL: WJ45SM

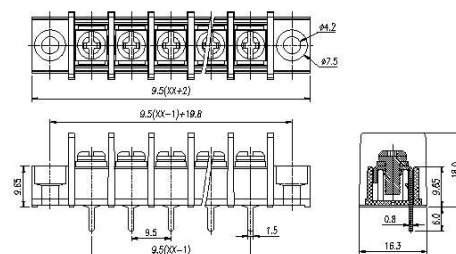

MODEL: WJ45HM

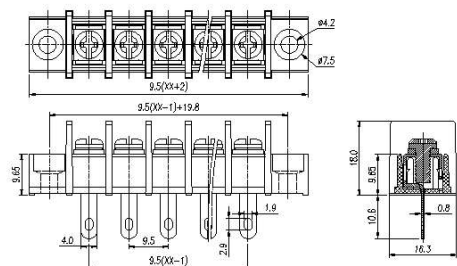






MODEL: WJ45RM

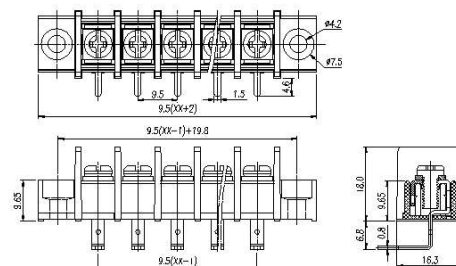

MATERIAL	
Screws	M4.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0





ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

www.RelianceNorthAmerica.com

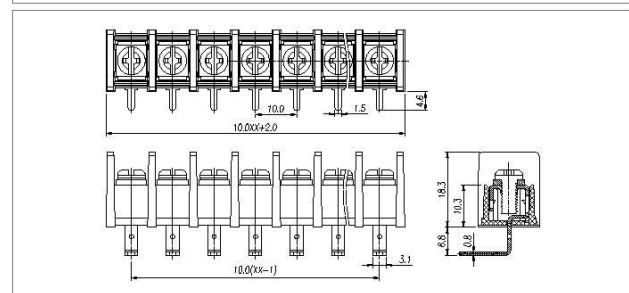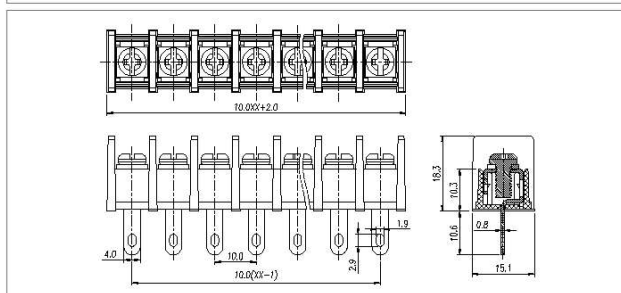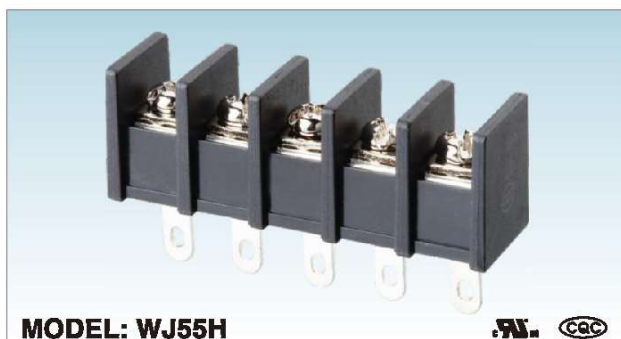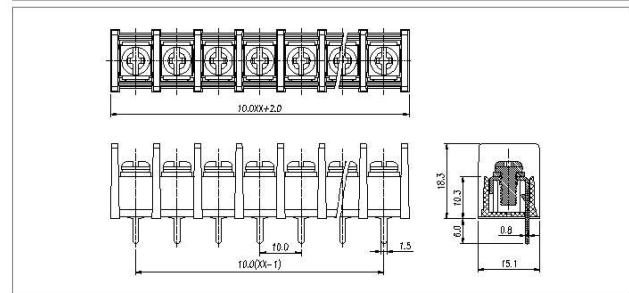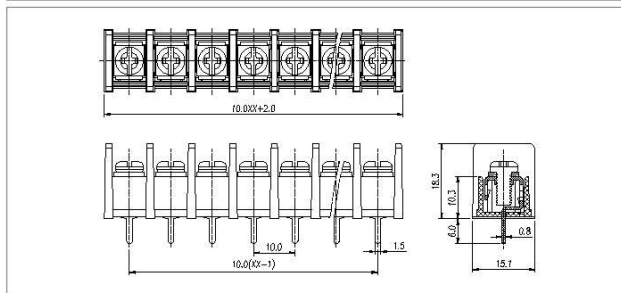









MATERIAL	
Screws	M4.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

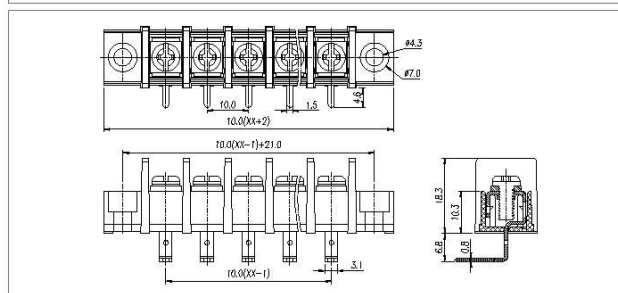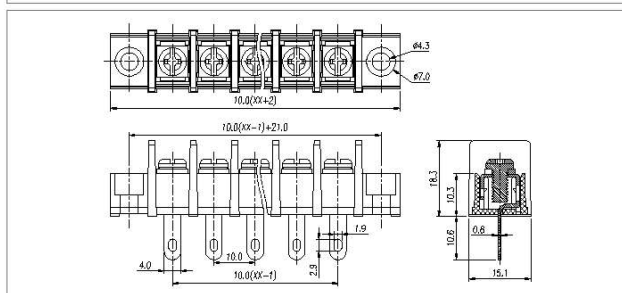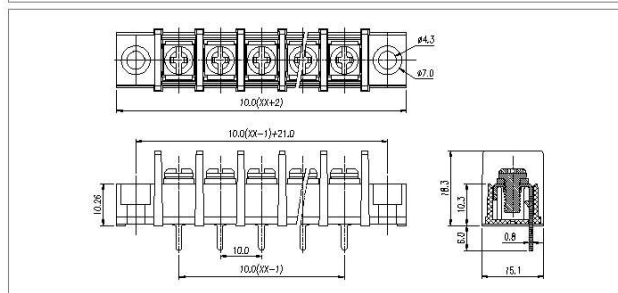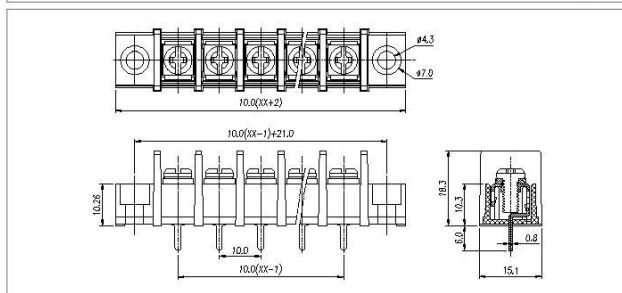

MATERIAL	
Screws	M4.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

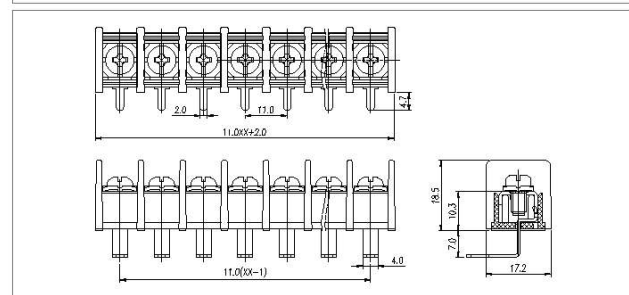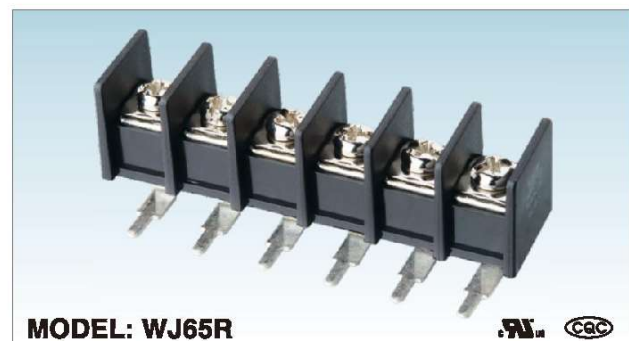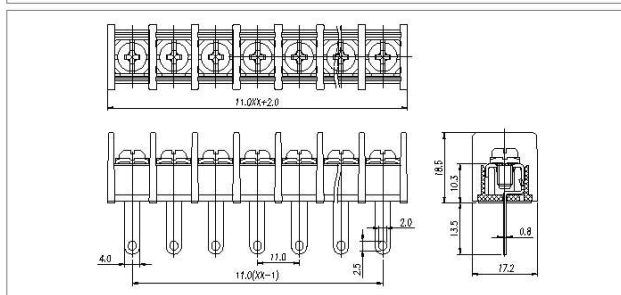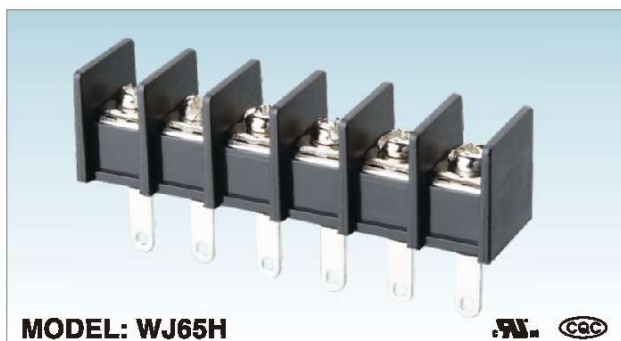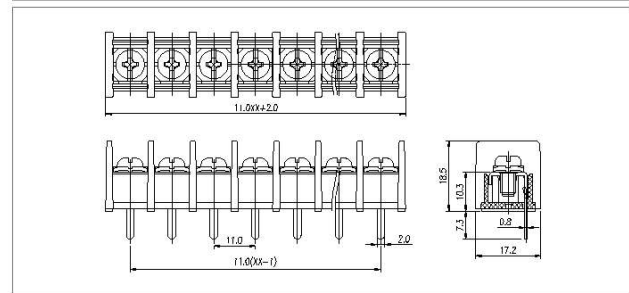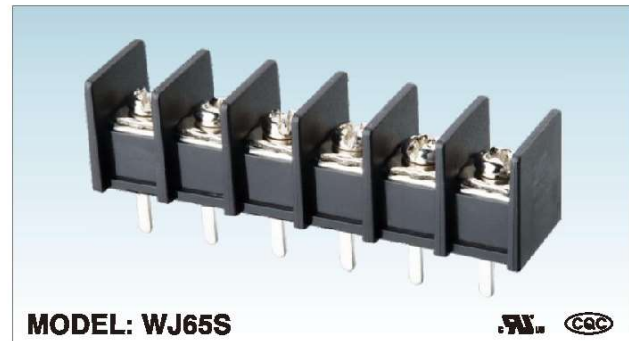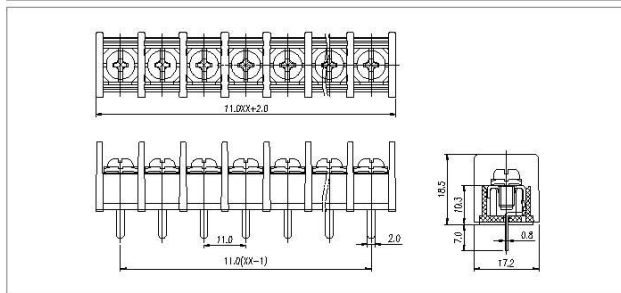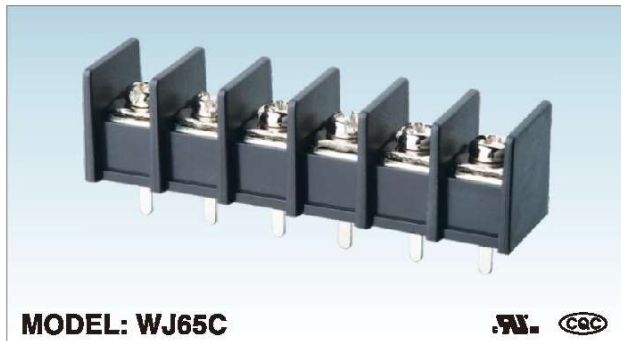


MATERIAL	
Screws	M4.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0


ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	




MODEL: WJ65CM

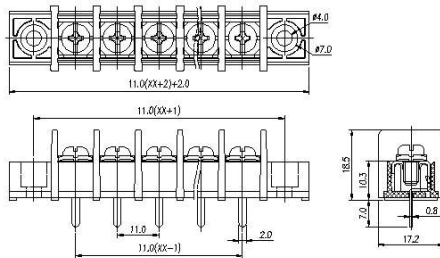


MODEL: WJ65SM

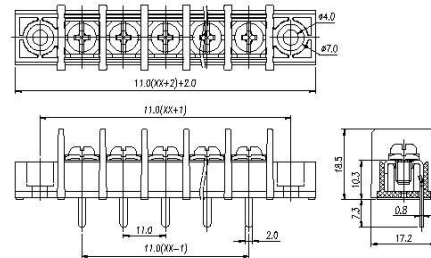

MODEL: WJ65HM

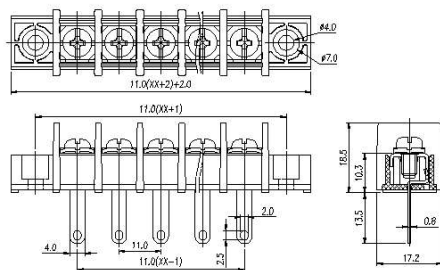





MODEL: WJ65RM

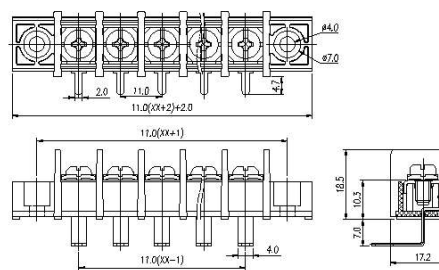

MATERIAL	
Screws	M4.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	





BARRIER TERMINAL BLOCK

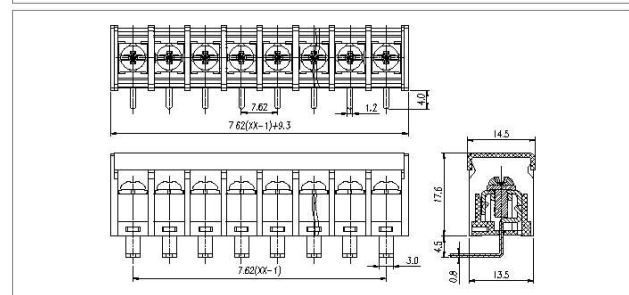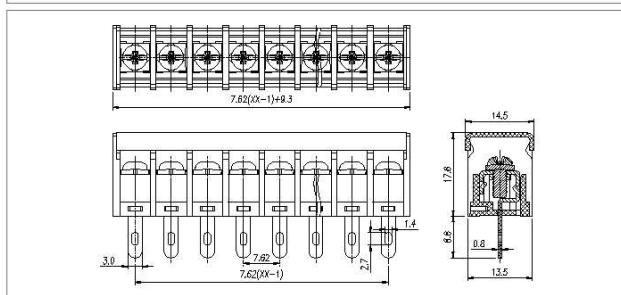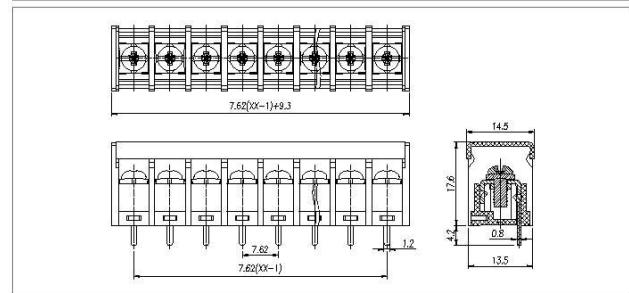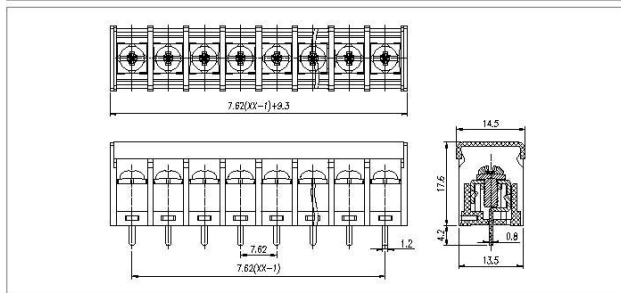

MATERIAL	
Screws	M3.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0





ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	

www.RelianceNorthAmerica.com

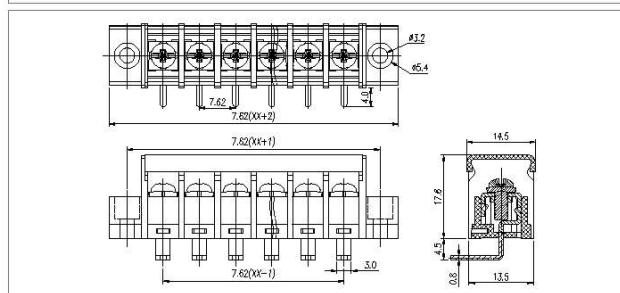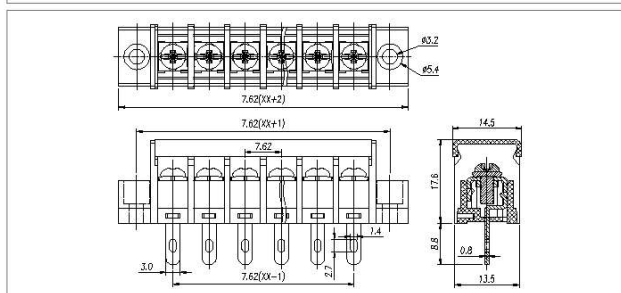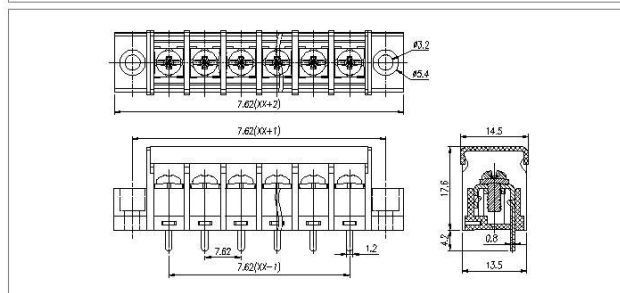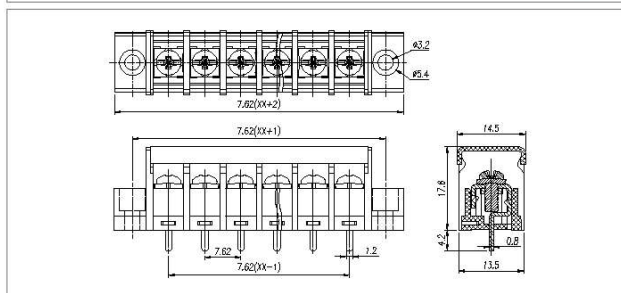

MATERIAL	
Screws	M3.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	

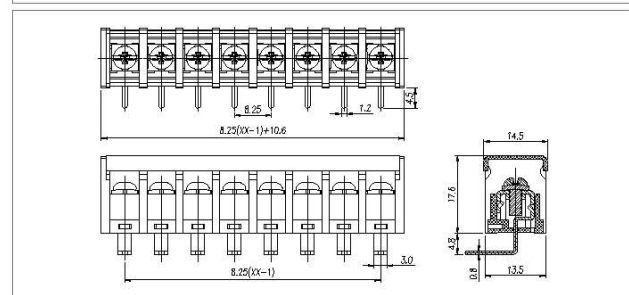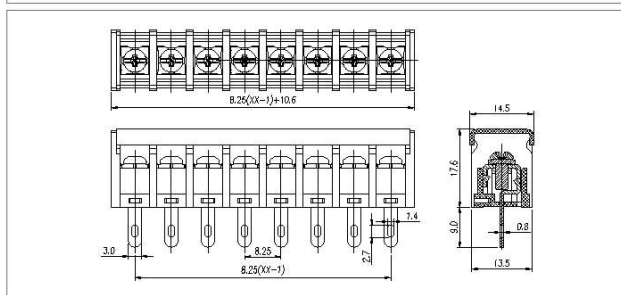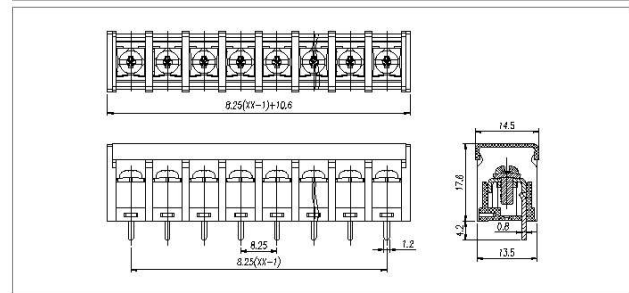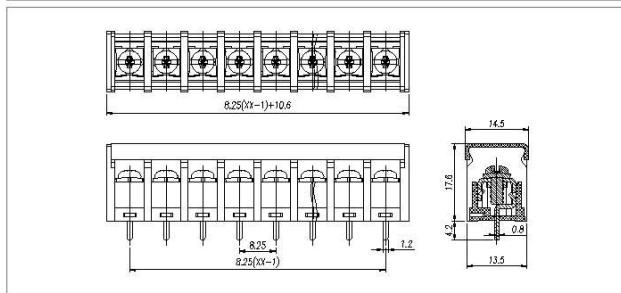


MATERIAL	
Screws	M3.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0


ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	





MODEL: WJ38CM

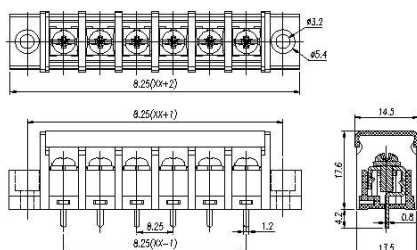


MODEL: WJ38SM

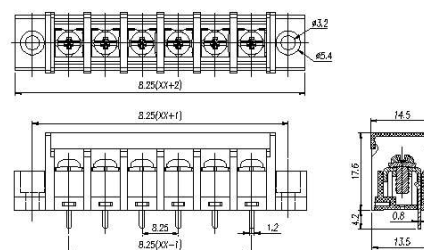

MODEL: WJ38HM

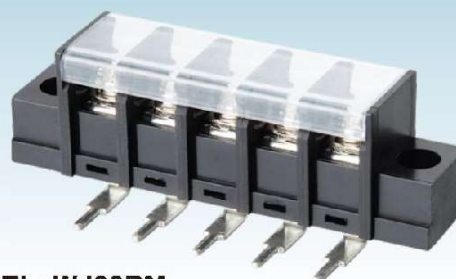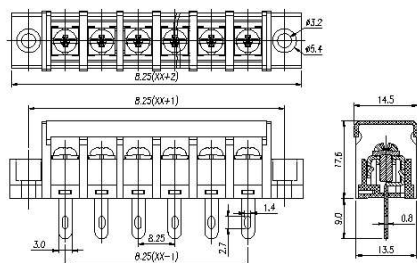

MODEL: WJ38RM

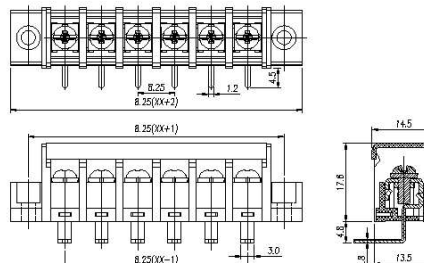


MATERIAL	
Screws	M3.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	22–14AWG	2.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500 MΩ /DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40°C~+105°C	
Torque	5.10kgf·cm/0.5Nm/4.43Lbin	


BARRIER TERMINAL BLOCK





MODEL: WJ48C




MODEL: WJ48S

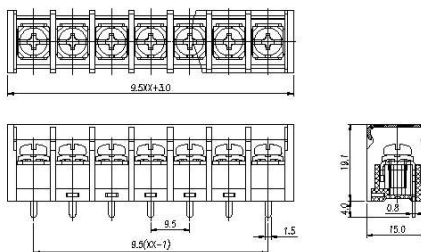

MODEL: WJ48H

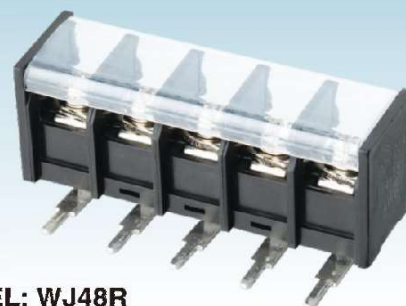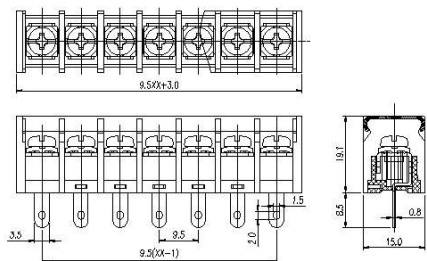

MODEL: WJ48R

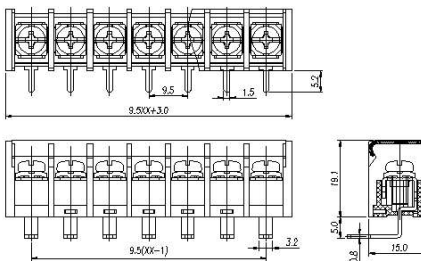


MATERIAL	
Screws	M4.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	


www.RelianceNorthAmerica.com




MODEL: WJ48CM

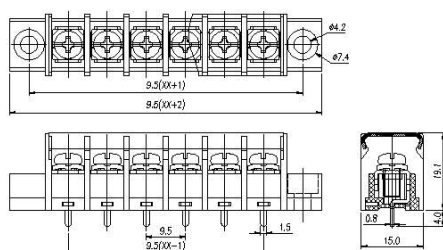


MODEL: WJ48SM

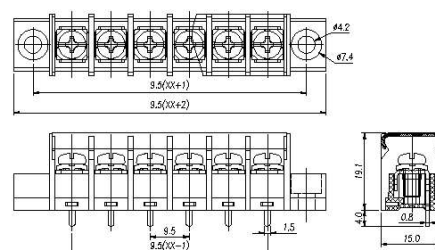

MODEL: WJ48HM

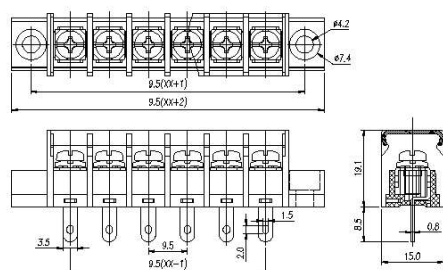

MODEL: WJ48RM

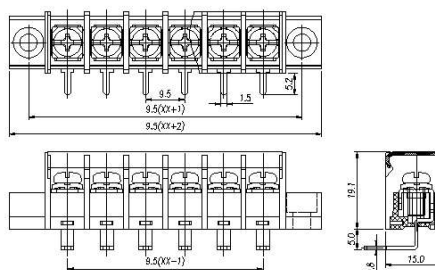


MATERIAL	
Screws	M4.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	


BARRIER TERMINAL BLOCK




MODEL: WJ58C

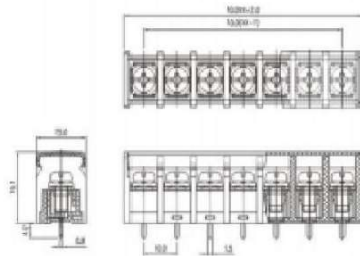


MODEL: WJ58S

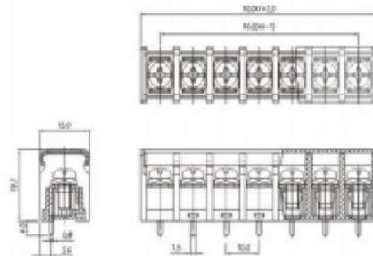

MODEL: WJ58H

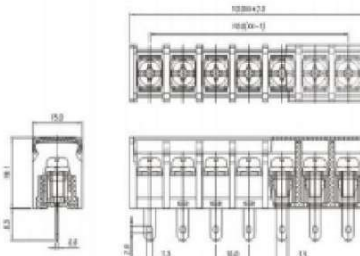

MODEL: WJ58R

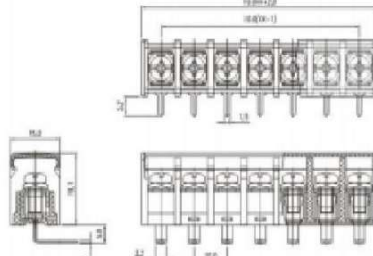



MATERIAL	
Screws	M4.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	-40°C ~ +105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbm-in	


www.RelianceNorthAmerica.com




MODEL: WJ58CM

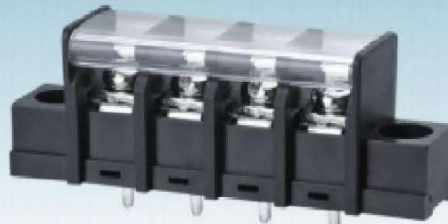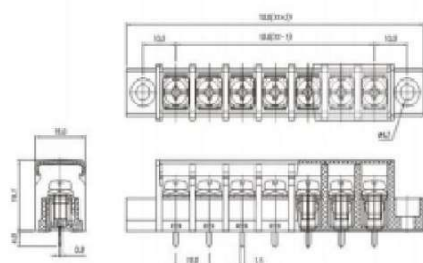


MODEL: WJ58SM

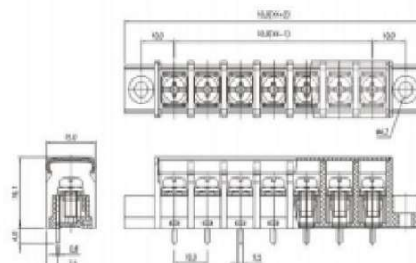

MODEL: WJ58HM

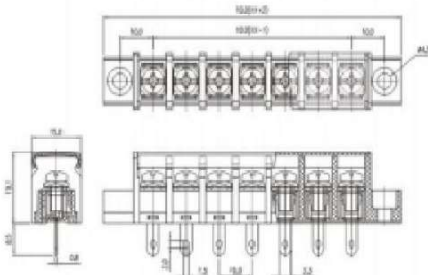

MODEL: WJ58RM

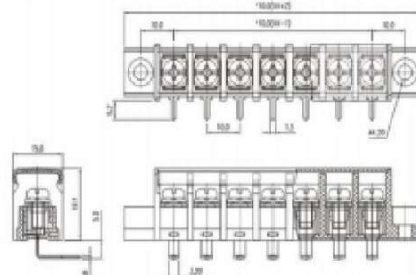


MATERIAL	
Screws	M4.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0


ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	-40°C ~ +105°C	
Torque	12.24kgf-cm/1.2Nm/10.6lbin	





MODEL: WJ68C




MODEL: WJ68S

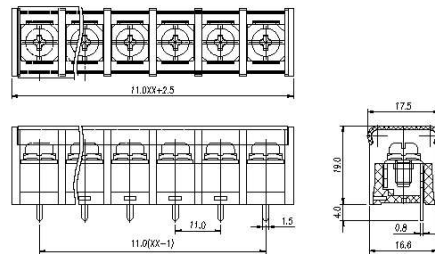

MODEL: WJ68H

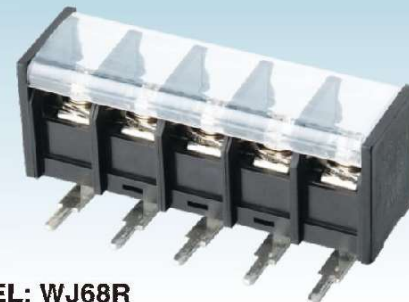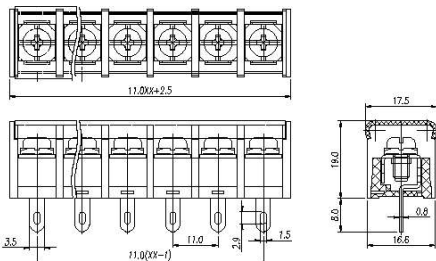

MODEL: WJ68R

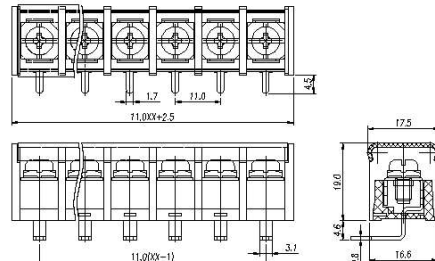


MATERIAL	
Screws	M4.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0


ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	





MODEL: WJ68CM

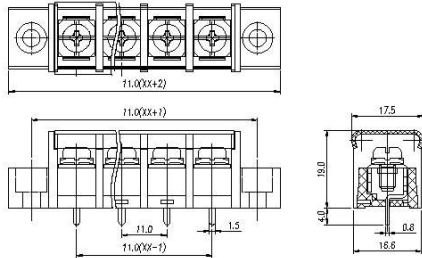


MODEL: WJ68SM

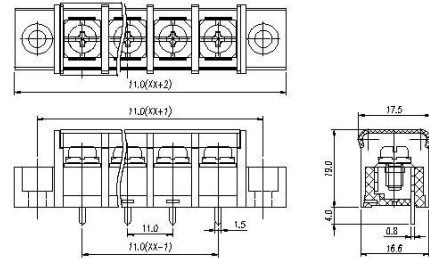

MODEL: WJ68HM

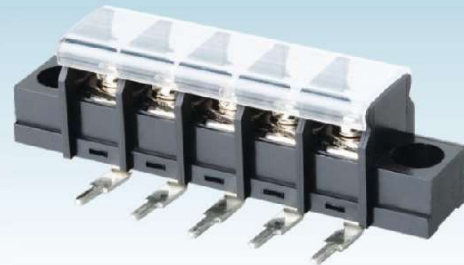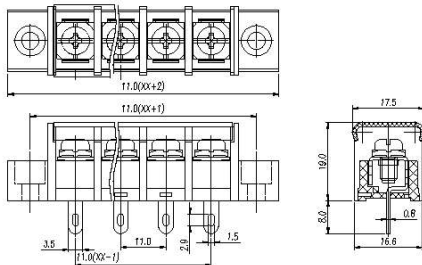

MODEL: WJ68RM

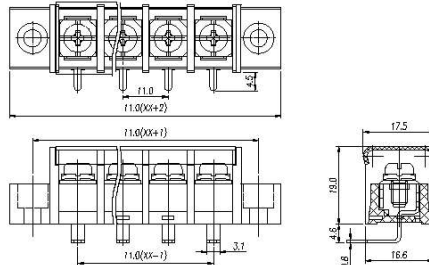


MATERIAL	
Screws	M4.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	


BARRIER TERMINAL BLOCK





MODEL: WJ78C

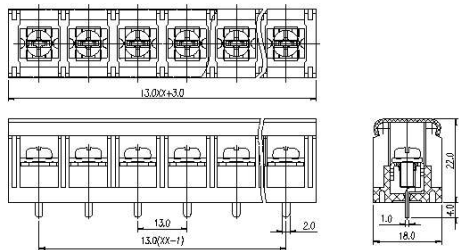


MODEL: WJ78S

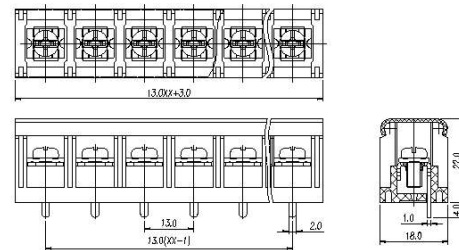

MODEL: WJ78H

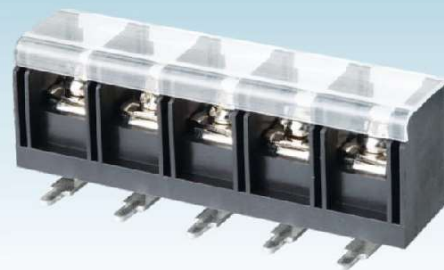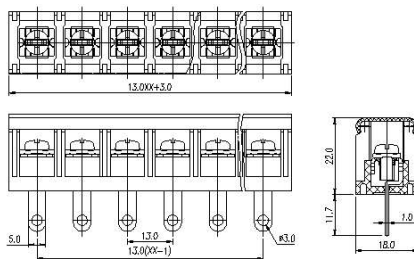


MODEL: WJ78R

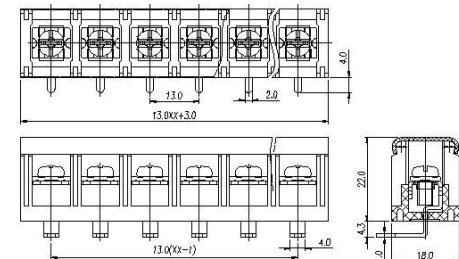

MATERIAL	
Screws	M4.0 Steel Ni plated
Pin Header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	600V	750V
Rated current	40A	41A
Wire range	18-10AWG	6.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

www.RelianceNorthAmerica.com

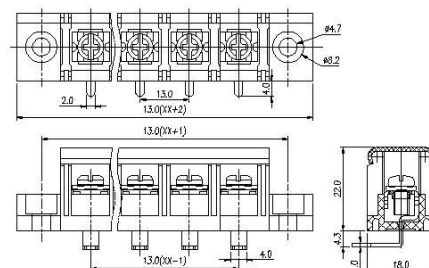

ELECTRICAL		
Standard	UL	IEC
Rated voltage	600V	750V
Rated current	40A	41A
Wire range	18-10AWG	6.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	-40°C ~ +105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	



Pitch: 7.62mm

MODEL: WJ06

CERTIFICATION	
---------------	--



Pitch: 6.35mm

MODEL: WJ16

CERTIFICATION	
---------------	--



Pitch: 6.35mm




MODEL: WJ16A

CERTIFICATION	
---------------	--

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	5.1kgf-cm/0.5Nm/4.43Lbin	

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	17.5A
Wire range	22-16AWG	1.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	5.1kgf-cm/0.5Nm/4.43Lbin	

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	17.5A
Wire range	22-16AWG	1.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	5.1kgf-cm/0.5Nm/4.43Lbin	

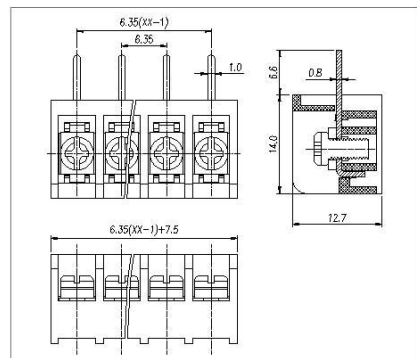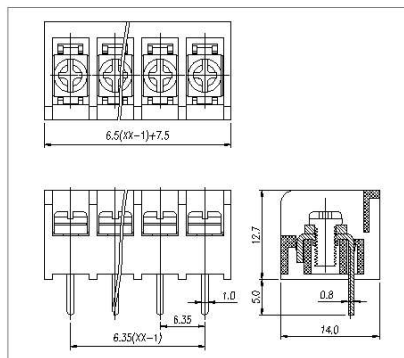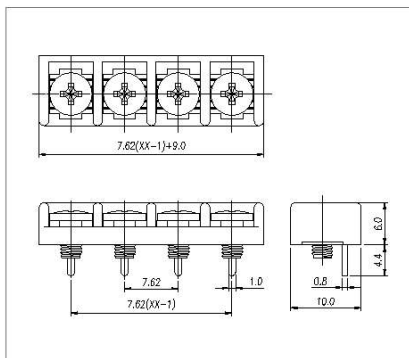



Pitch:6.35mm

MODEL: WJ16R


CERTIFICATION	
---------------	--



Pitch:8.5mm

MODEL: WJ26(HB8500)

CERTIFICATION	
---------------	--

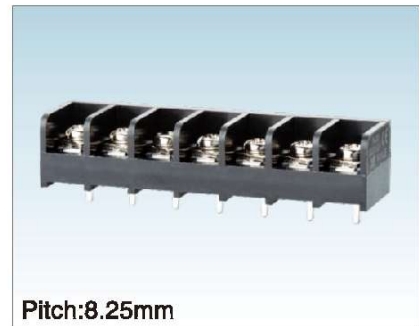

Pitch:8.25mm




MODEL: WJ36

CERTIFICATION	
---------------	--

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	17.5A
Wire range	22-16AWG	1.6mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	5.1kgf-cm/0.5Nm/4.43Lbin	

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	20A	24A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	5.1kgf-cm/0.5Nm/4.43Lbin	

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	20A	24A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	5.1kgf-cm/0.5Nm/4.43Lbin	

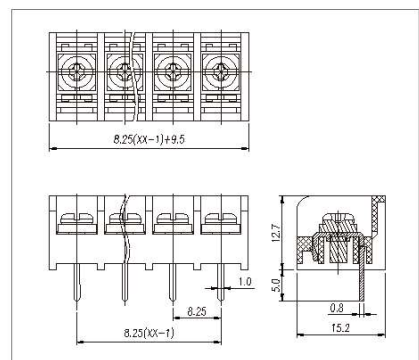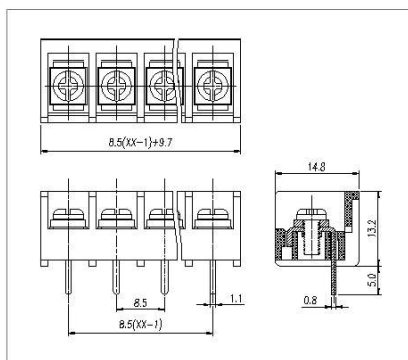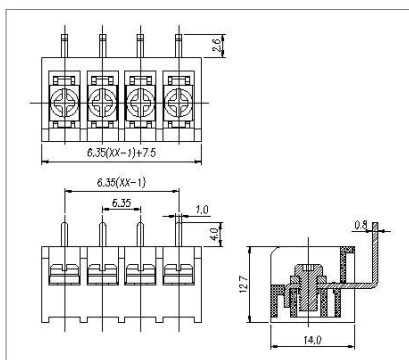

BARRIER TERMINAL BLOCK



Pitch:8.25mm

MODEL: WJ36A

CERTIFICATION	 
---------------	---



Pitch:8.25mm

MODEL: WJ36G

CERTIFICATION	 
---------------	---



Pitch:9.5mm




MODEL: WJ46(HB9500)

CERTIFICATION	 
---------------	---

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	20A	24A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	5.1kgf-cm/0.5Nm/4.43Lbin	

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	20A	24A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20m Ω	
Insulation resistance	500M Ω /DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	5.1kgf-cm/0.5Nm/4.43Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20m Ω	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

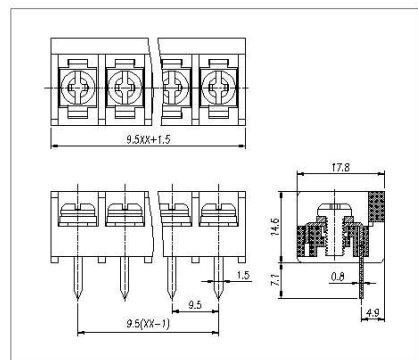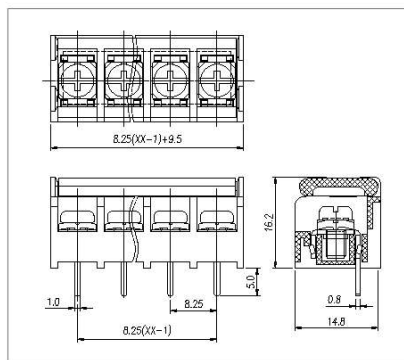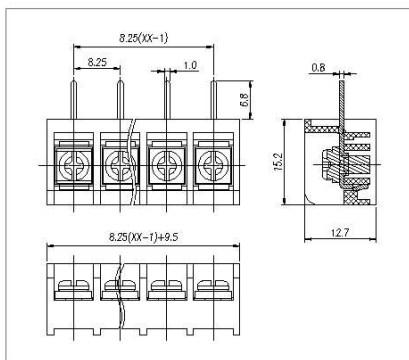



Pitch:9.5mm

MODEL: WJ46A

CERTIFICATION	
---------------	---



Pitch:9.5mm

MODEL: WJ46G

CERTIFICATION	
---------------	---



Pitch:9.5mm




MODEL: WJ46GA


CERTIFICATION	
---------------	---

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

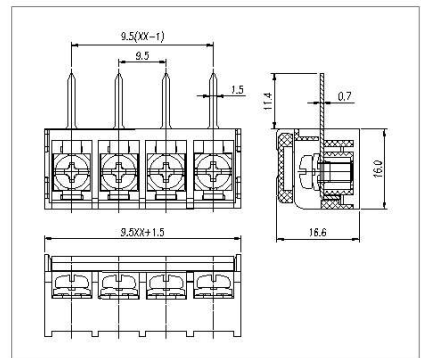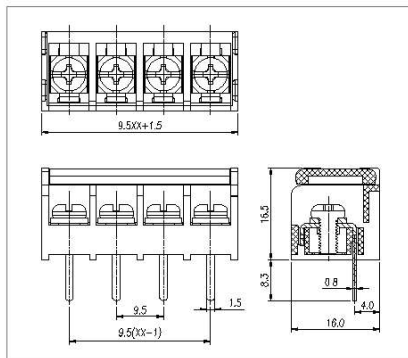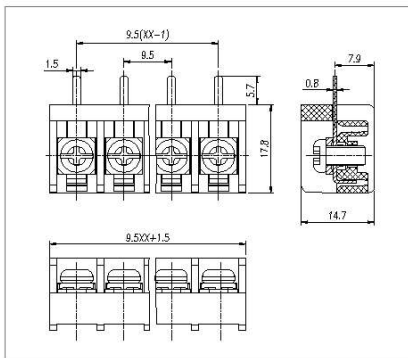

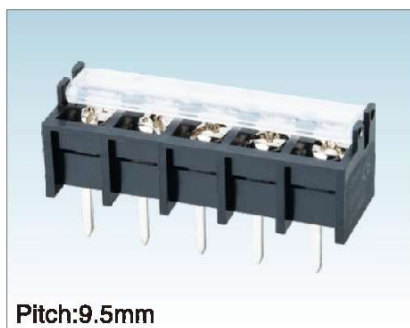

Pitch: 9.5mm

MODEL: WJ46GX

CERTIFICATION	 
---------------	---



Pitch: 11.1mm

MODEL: WJ46GG

CERTIFICATION	
---------------	--



Pitch: 11.1mm




MODEL: WJ66

CERTIFICATION	 
---------------	---

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA68, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	30A	32A
Wire range	22-10AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

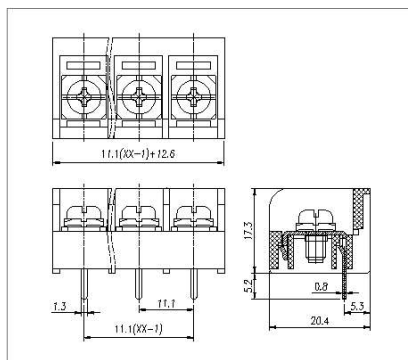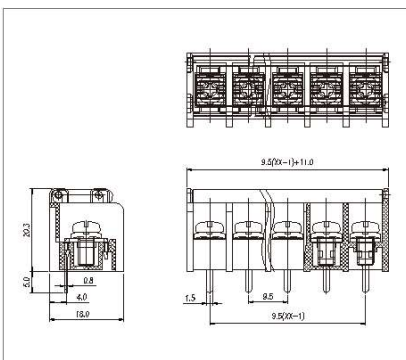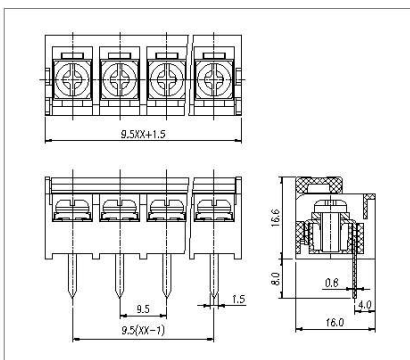




Pitch:11.1mm

MODEL: WJ66A


CERTIFICATION	UL, CQC
---------------	---------

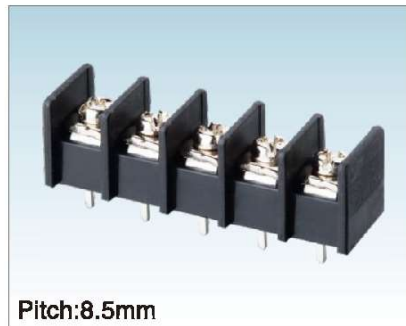

Pitch:8.5mm

MODEL: WJ31

CERTIFICATION	CQC
---------------	-----

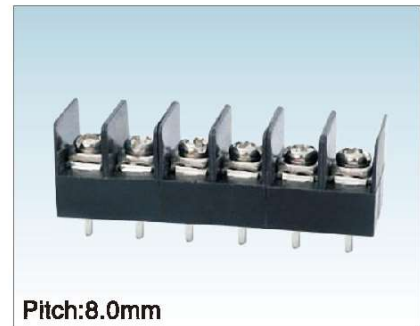

Pitch:8.0mm




MODEL: WJ32


CERTIFICATION	CQC
---------------	-----

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	30A	32A
Wire range	22-10AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/D/C500V	
Withstanding voltage	AC2000V/1 Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	

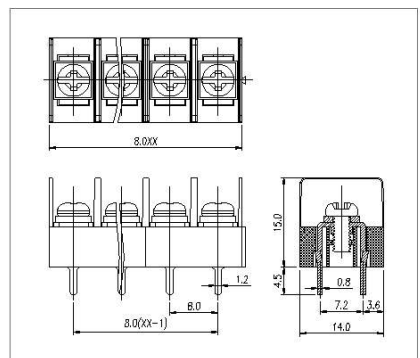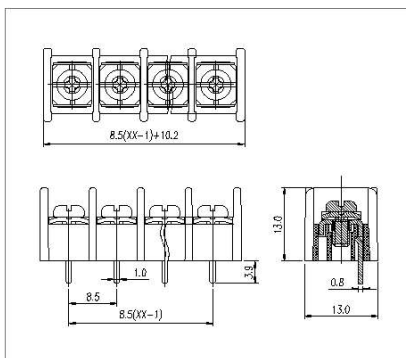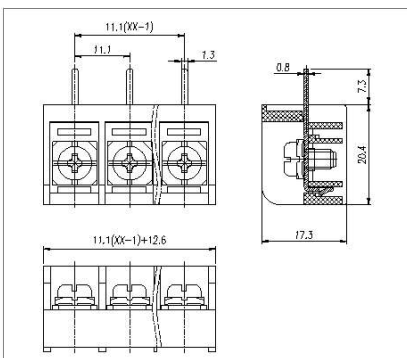

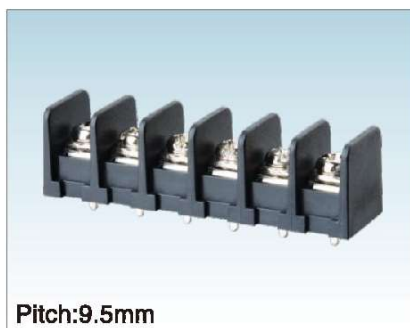

Pitch:9.5mm

MODEL: WJ45X


CERTIFICATION



Pitch:9.5mm

MODEL: WJ48RW

CERTIFICATION

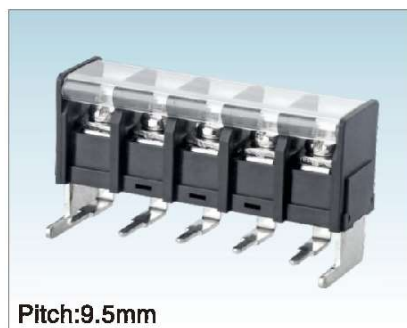

Pitch:9.5mm




MODEL: WJ58RW

CERTIFICATION

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/10.6Lbin	

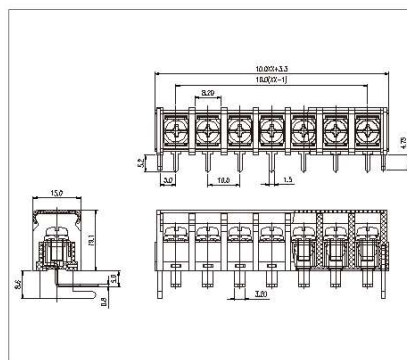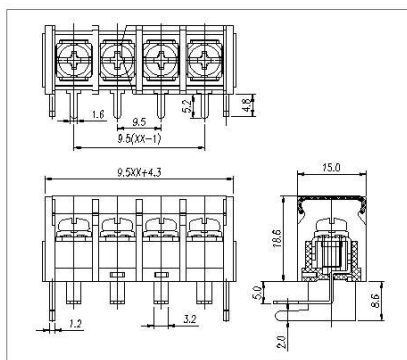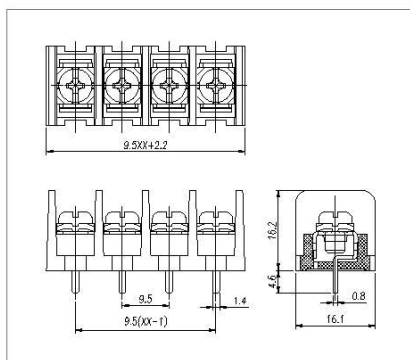




Pitch:9.5mm

MODEL: WJ49M


CERTIFICATION	
---------------	--

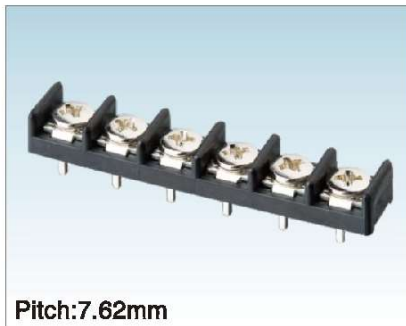

Pitch:7.62mm

MODEL: CZX7620

CERTIFICATION	CCC
---------------	-----

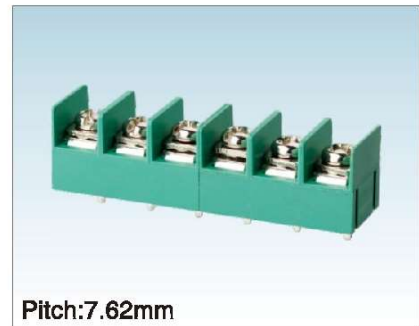


Pitch:7.62mm


MODEL: CZ7620

CERTIFICATION	CCC
---------------	-----


MATERIAL		
Screws	M3.5 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	8.16kgf-cm/0.8Nm/7.0Lbin	

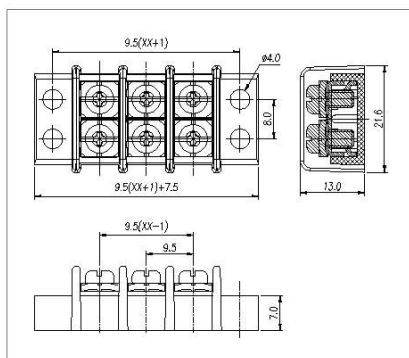

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	17.5A
Wire range	22-16AWG	1.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	

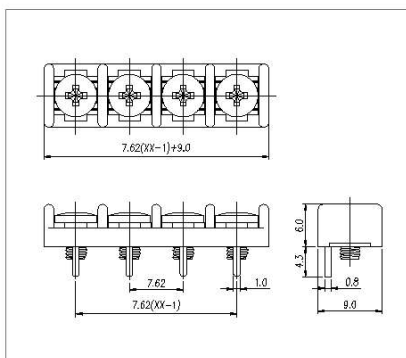

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	17.5A
Wire range	22-16AWG	1.6mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	

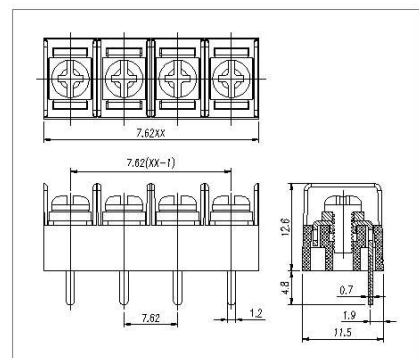



Pitch: 7.62mm

MODEL: CZ7620H

CERTIFICATION



Pitch: 7.62mm

MODEL: 2CZ7620A

CERTIFICATION



Pitch: 7.62mm

MODEL: 2CZ7620B




CERTIFICATION




MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	17.5A
Wire range	22-16AWG	1.6mm ²
Contact Resistance	20mΩ	
Insulation resistance	500M Ω /DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	17.5A
Wire range	22-16AWG	1.6mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	17.5A
Wire range	22-16AWG	1.6mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	5.10kgf-cm/0.5Nm/4.43lbin	

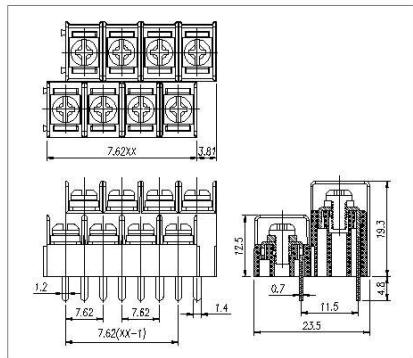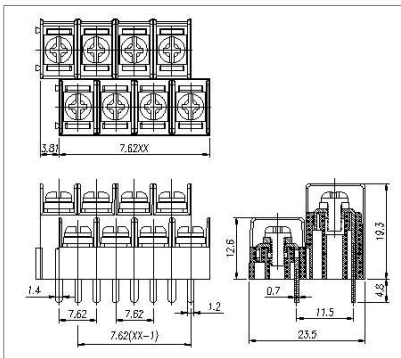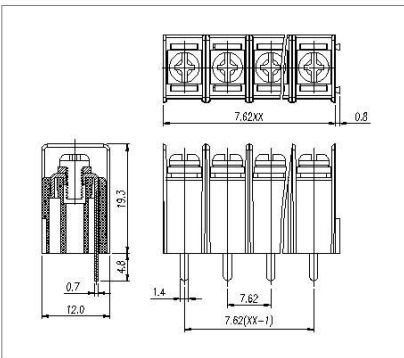

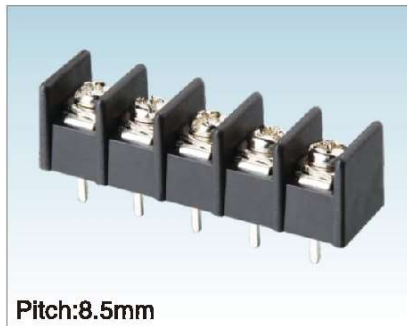

Pitch:8.5mm

MODEL: CZ8500


CERTIFICATION	
---------------	--



Pitch:8.5mm

MODEL: 2CZ8500

CERTIFICATION	
---------------	--

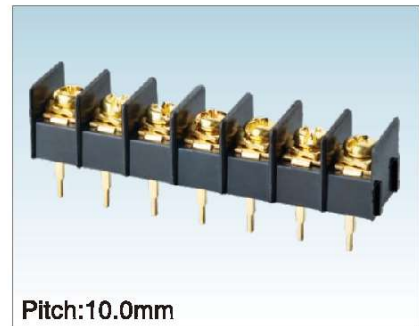


Pitch:10.0mm


MODEL: SR-10

CERTIFICATION	
---------------	--


MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	17.5A
Wire range	22-16AWG	1.6mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	

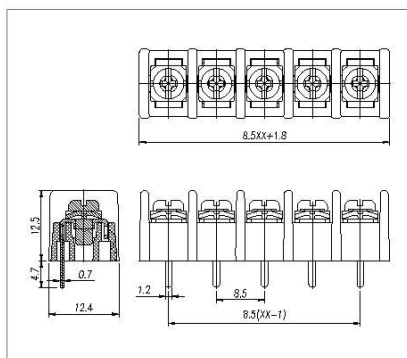

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	17.5A
Wire range	22-16AWG	1.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	

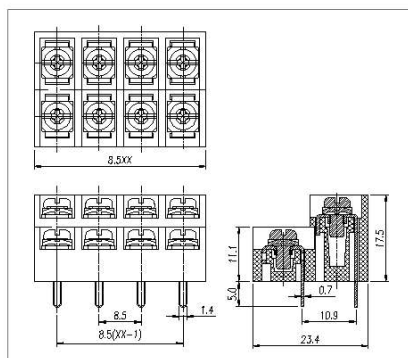

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

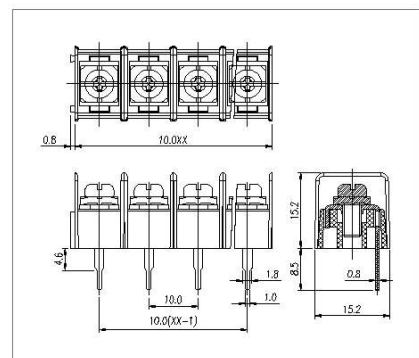



Pitch:11.0mm

MODEL: EM-1

CERTIFICATION	
---------------	--



Pitch:11.0mm

MODEL: EM-1A

CERTIFICATION	
---------------	--



Pitch:11.0mm




MODEL: EM-2

CERTIFICATION	
---------------	--

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	25A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	25A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	25A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

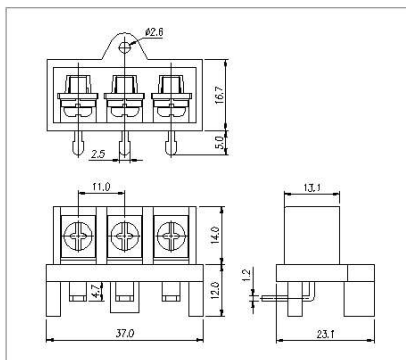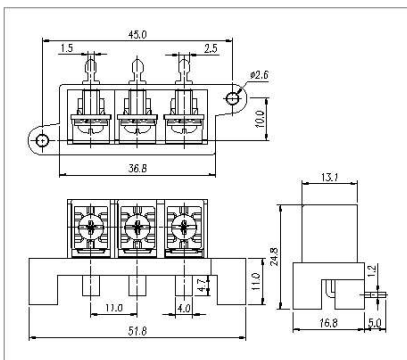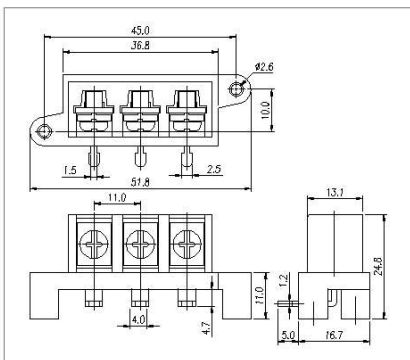



Pitch:11.0mm

MODEL: EM-2A

CERTIFICATION	
---------------	--



Pitch:11.5mm

MODEL: EM-3

CERTIFICATION	
---------------	--



Pitch:8.8mm




MODEL: EM-4

CERTIFICATION	
---------------	--

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	25A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	30A	35A
Wire range	22-10AWG	6.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Harder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	5.10kgf·cm/0.5Nm/4.43Lbin	

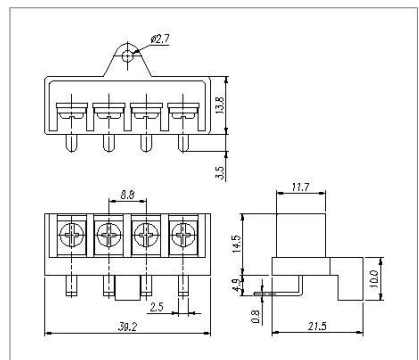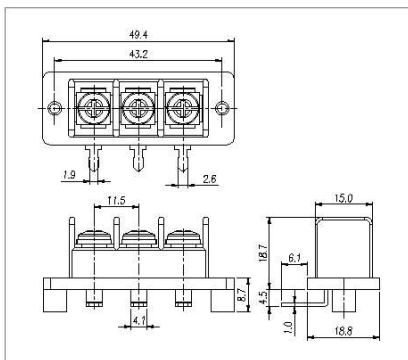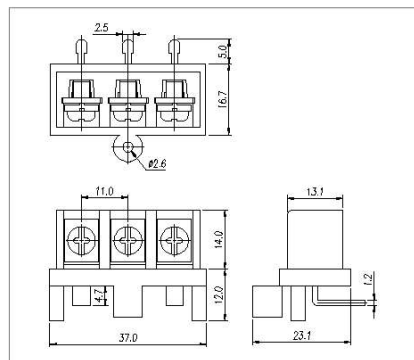



Pitch:12.5mm

MODEL: EM-5

CERTIFICATION	
---------------	--



Pitch:12.5mm

MODEL: EM-51H

CERTIFICATION	
---------------	--



Pitch:12.5mm




MODEL: EM-52H

CERTIFICATION	
---------------	--

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	32A	37.5A
Wire range	22-10AWG	6.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃--+105℃	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	32A	37.5A
Wire range	22-10AWG	6.0mm ²
Contact Resistance	20m Ω	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	460V
Rated current	32A	37.5A
Wire range	22-10AWG	6.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

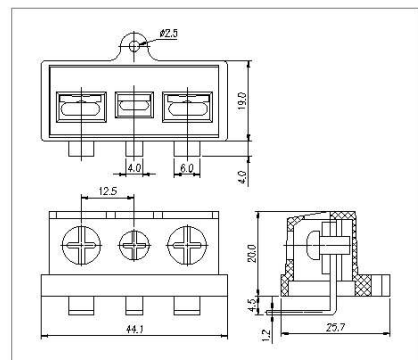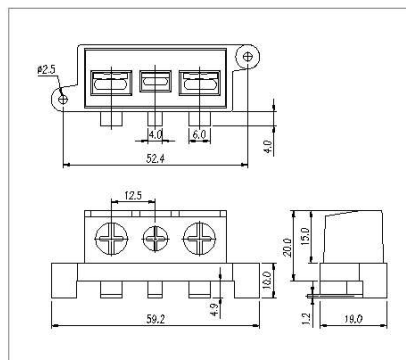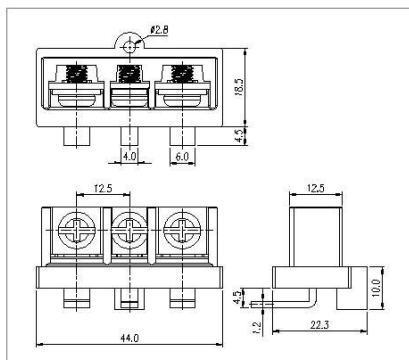



Pitch:11.0mm

MODEL: EM-1H

CERTIFICATION	CCC
---------------	-----



Pitch:11.0mm

MODEL: EM-2H

CERTIFICATION	CCC
---------------	-----



Pitch:11.0mm




MODEL: EMT-2

CERTIFICATION	
---------------	--

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	25A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃--+105℃	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	25A	32A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	760V
Rated current	30A	35A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ /DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃--+105℃	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

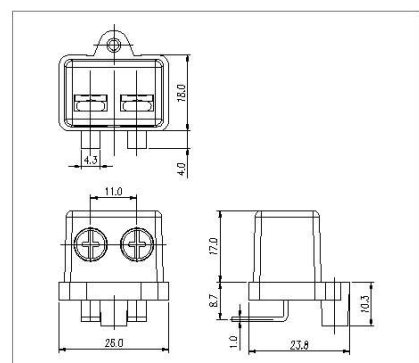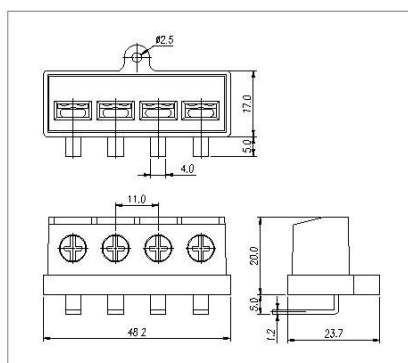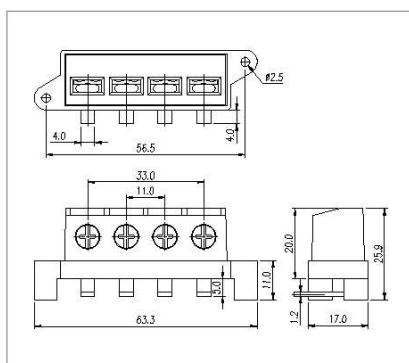



Pitch:12.65mm

MODEL: EMT-3

CERTIFICATION	
---------------	--



Pitch:11.0mm

MODEL: EMT-4

CERTIFICATION	
---------------	--



Pitch:11.0mm




MODEL: EM-21

CERTIFICATION	
---------------	--

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	32A	37.5A
Wire range	22-10AWG	6.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	30A	35A
Wire range	22-12AWG	4.0mm²
Contact Resistance	20m Ω	
Insulation resistance	500M Ω/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	30A	35A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

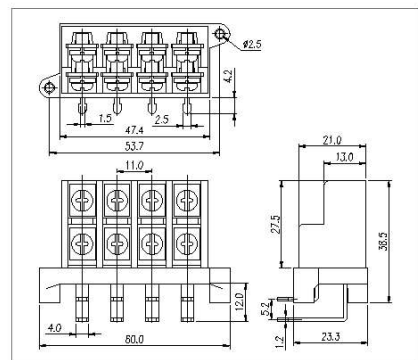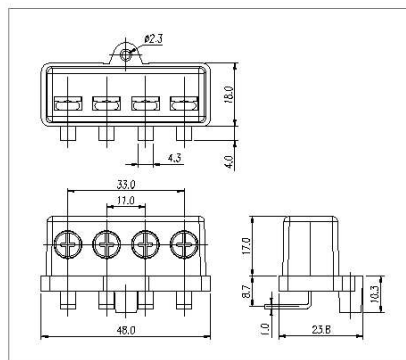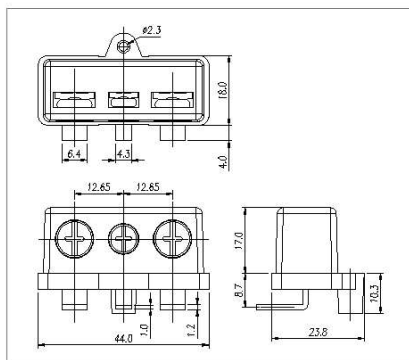



Pitch:11.0mm

MODEL: EM-21A

CERTIFICATION



MODEL: WJET-04


CERTIFICATION




MODEL: WJET-10

CERTIFICATION


MATERIAL		
Screws	M4.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	30A	35A
Wire range	22-12AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40°C~+105°C	
Torque	12.24kgf-cm/1.2Nm/4.0Lbin	

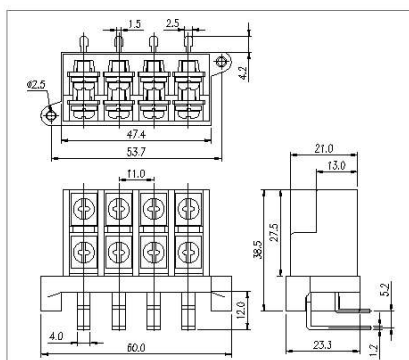


MATERIAL	
Conductor	Brass, Sn plated
Housing	PA66, UL94V-2
ELECTRICAL	
Standard	IEC
Rated voltage	400V
Rated current	3A
Wire range	0.2-0.5mm ²
Contact Resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C




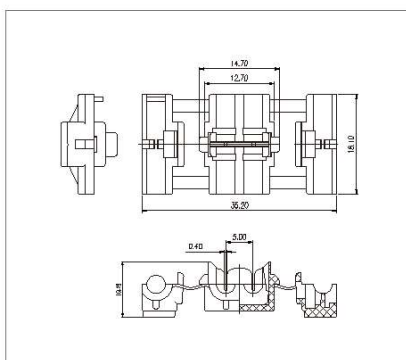


MATERIAL	
Conductor	Brass, Sn plated
Housing	PA66, UL94V-2
ELECTRICAL	
Standard	IEC
Rated voltage	400V
Rated current	10A
Wire range	0.5-1.0mm ²
Contact Resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40°C~+105°C

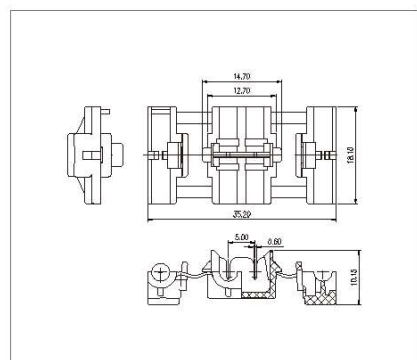



MODEL: SP7-L

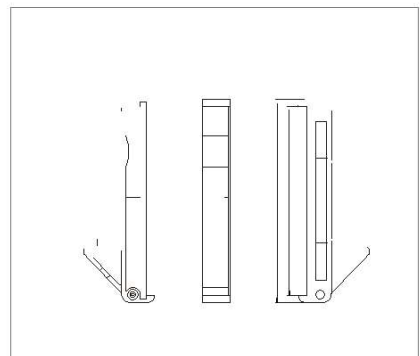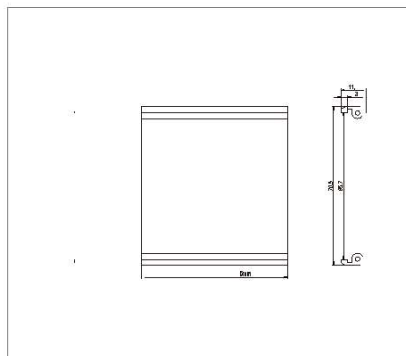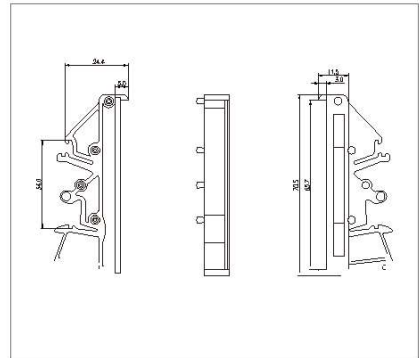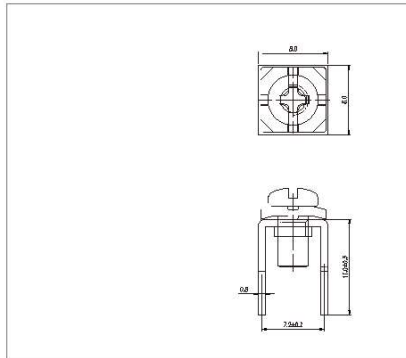






MODEL: SP6



MODEL: SP7



MODEL: SP8

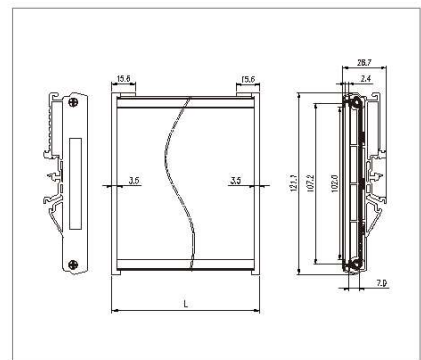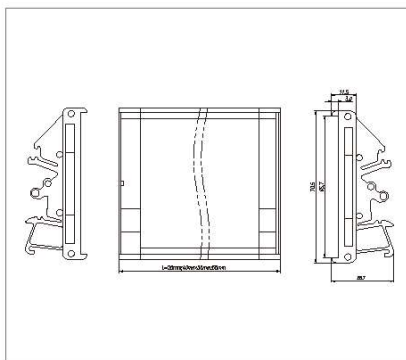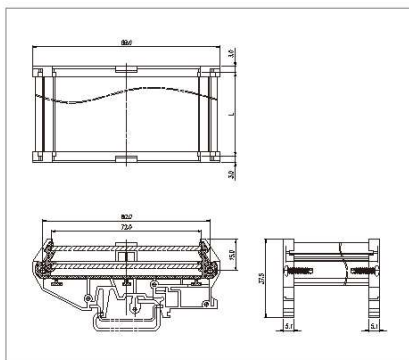

INDEX

www.RelianceNorthAmerica.com

INDEX

Model	Page	Model	Page	Model	Page	Model	Page
WJ250-2.5	091	WJT01	110	WJ28SM	130	WJ66	145
WJ250-3.5	091	WJGO1	110	WJ28HM	130	WJ66A	146
WJ236	092	MY_HS	114	WJ28RM	130	WJ31	146
WJ243A	092	MY_HS+1.2	114	WJ38C	131	WJ32	146
WJ245-5.0/5.08/7.5/7.62	092	MY_HS+4.3	114	WJ38S	131	WJ45X	147
WJ0401/0501-01XX	094	MY_H	115	WJ38H	131	WJ48RW	147
WJ0401/0501-02XX	094	MY_H+1.2	115	WJ38R	131	WJ58RW	147
WJ0401/0501-03XX	094	MY_H+4.3	115	WJ38CM	132	WJ49M	148
WJ0401/0501-04XX	095	MY_HW	116	WJ38SM	132	CZX7620	148
WJ0401/0501-05XX	095	MY_HW+1.2	116	WJ38HM	132	CZ7620	148
WJ0401/0501-06XX	095	MY_HW+4.3	116	WJ38RM	132	CZ7620H	149
WJ0401/0501-07XX	096	MY510	117	WJ48C	133	2CZ7620A	149
WJ0401/0501-08XX	096	WJ25C	119	WJ48S	133	2CZ7620B	149
WJ0601/0701-01XX	096	WJ26S	119	WJ48H	133	CZ8500	150
WJ0601/0701-02XX	097	WJ25H	119	WJ48R	133	2CZ8500	150
WJ0601/0701-03XX	097	WJ25R	119	WJ48CM	134	SR-10	150
WJ0601/0701-04XX	097	WJ25CM	120	WJ48SM	134	EM-1	151
WJ0601/0701-05XX	098	WJ25SM	120	WJ48HM	134	EM-1A	151
WJ0601/0701-06XX	098	WJ25HM	120	WJ48RM	134	EM-2	151
WJ0601/0701-07XX	098	WJ25RM	120	WJ58C	135	EM2A	152
WJ0601/0701-08XX	099	WJ35C	121	WJ58S	135	EM-3	152
WJ0402/0502-01XX	099	WJ35S	121	WJ58H	135	EM-4	152
		WJ35H	121	WJ58R	135	EM-5	153
Spring Terminal		WJ35R	121	WJ58CM	136	EM-51H	153
Block Series		WJ35CM	122	WJ58SM	136	EM-52H	153
WJ0402/0502-02XX	099	WJ35SM	122	WJ58HM	136	EM-1H	154
WJ0402/0502-05XX	100	WJ35HM	122	WJ58RM	136	EM-2H	154
WJ0402/0502-06XX	100	WJ35RM	122	WJ68C	137	EMT-2	154
WJ0602/0702-01XX	100	WJ45C	123	WJ68S	137	EMT-3	155
WJ0602/0702-02XX	101	WJ45S	123	WJ68H	137	EMT-4	155
WJ0602/0702-05XX	101	WJ45H	123	WJ68R	137	EM-21	155
WJ0602/0702-06XX	101	WJ45R	123	WJ68CM	138	EM-21A	156
WJ0403/0503-01XX	102	WJ45CM	124	WJ68SM	138	WJET-04	156
WJ0403/0503-02XX	102	WJ45SM	124	WJ68HM	138	WJET-10	156
WJ0403/0503-03XX	102	WJ45HM	124	WJ68RM	138	WJET-25	157
WJ0403/0503-04XX	103	WJ45RM	124	WJ78C	139	WJK01	157
WJ0403/0503-05XX	103	WJ55C	125	WJ78S	139	SP7-L	157
WJ0403/0503-06XX	103	WJ55S	125	WJ78H	139	SP7-EXX	157
WJ0603/0703-01XX	104	WJ55H	125	WJ78R	139	SP7-R	157
WJ0603/0703-02XX	104	WJ55R	125	WJ78CM	140	SP6	158
WJ0603/0703-03XX	104	WJ55CM	126	WJ78SM	140	SP7	158
WJ0603/0703-04XX	105	WJ55SM	126	WJ78HM	140	SP8	158
WJ0603/0703-05XX	105	WJ55HM	126	WJ78RM	140		
WJ0603/0703-06XX	105	WJ55RM	126	WJ06	141		
WJ0404/0504-01XX	106	WJ65C	127	WJ16	141		
WJ0404/0504-02XX	106	WJ65S	127	WJ16A	141		
WJ0404/0504-03XX	106	WJ65H	127	WJ16R	142		
WJ0404/0504-04XX	107	WJ65R	127	WJ26(HB8500)	142		
WJ0604/0704-01XX	107	WJ65CM	128	WJ36	142		
WJ0604/0704-02XX	107	WJ65SM	128	WJ36A	143		
WJ0604/0704-03XX	108	WJ65HM	128	WJ36G	143		
WJ0604/0704-04XX	108	WJ65RM	128	WJ46(HB9500)	143		
WJ0201/0301-01XX	108	WJ28C	129	WJ46A	144		
WJ0201/0301-02XX	109	WJ28S	129	WJ46G	144		
WJ0202/0302-01XX	109	WJ28H	129	WJ46GA	144		
WJ0202/0302-02XX	109	WJ28R	129	WJ46GX	145		
		WJ28CM	130	WJ46GG	145		

Reliance North America



Reliance
North America

The Smarter Alternative

Reliance North America

30 Gick Road, Saratoga Springs, NY 12866

518 - 393-6911

Info@RelianceNorthAmerica.com

Learn More at:

www.RelianceNorthAmerica.com