
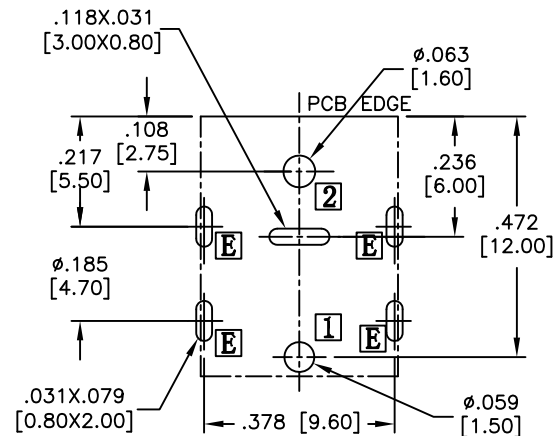



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/7/16	
A		UPDATE DRAWING	10/18/17	AY/MY

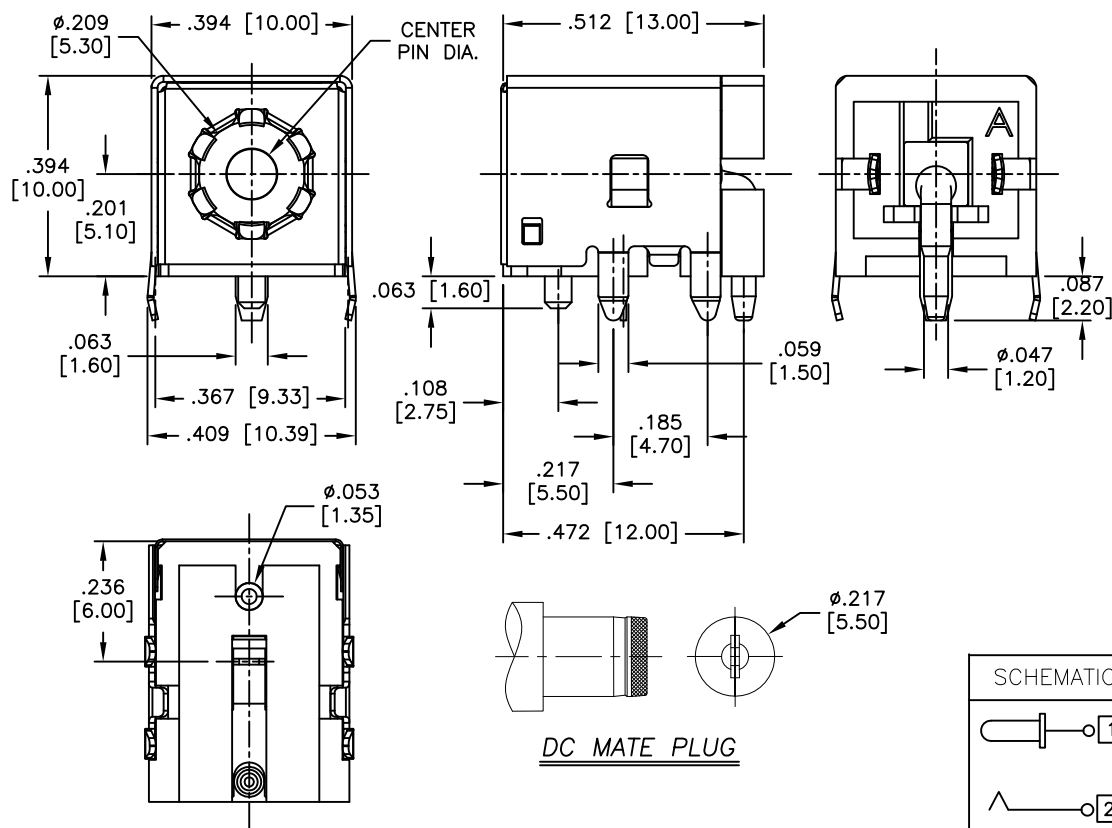

RECOMMENDED PCB LAYOUT



PART NO.	CENTER PIN DIA.
ADC-096-1-T/R	0.079 [2.00]
ADC-096-2-T/R	0.098 [2.50]
ADC-096-9-T/R	0.065 [1.65]

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy, Silver plated

Center Pin: Zn alloy, Nickel plated

Shield: Stainless steel

Electrical:

Voltage rating: DC 20V.

Current rating: 4 Amp

Contact resistance: 30 mohms max.

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -20°C to +70°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	3/7/16
CHECKED	LW	3/7/16
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE			
DC POWER JACK, 1.65mm, 2.00mm, 2.50mm, CENTER PIN			
SIZE	PART NO.	REV.	
X	ADC-096-X-T/R	A	
REF:	S00002C	SCALE:	NTS
SHEET 1 OF 1			