

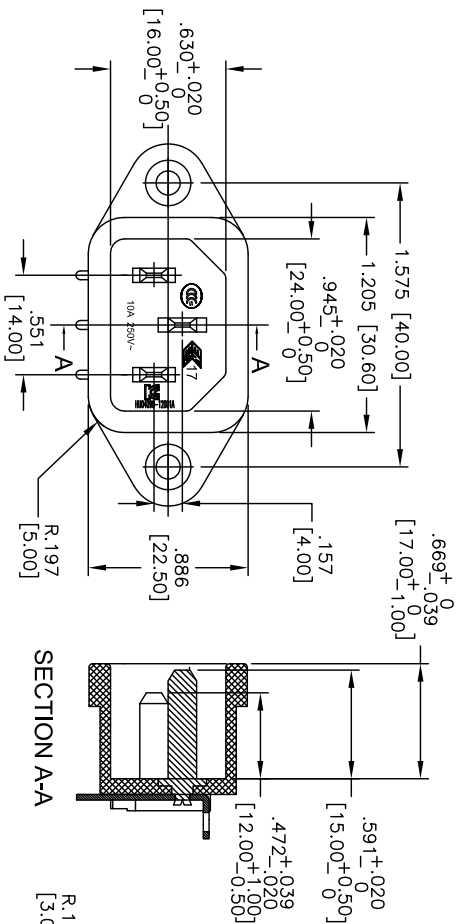
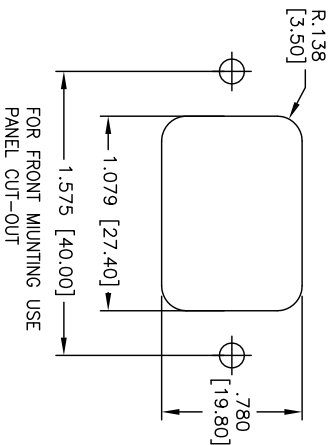
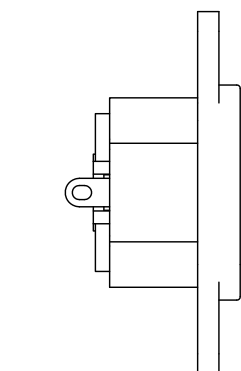
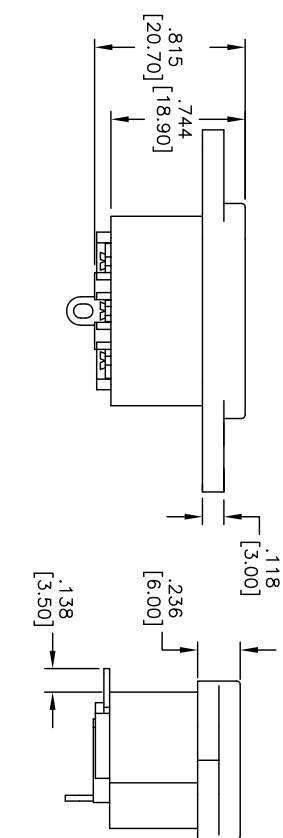


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/10/07	
A		REDRAWN	7/11/13	



SECTION A-A

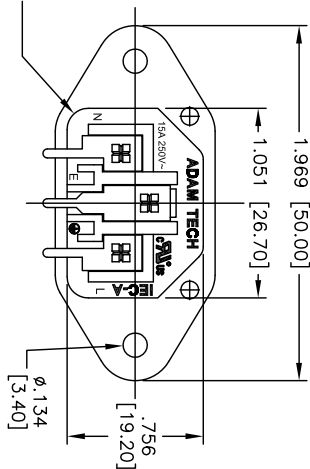

FOR FRONT MOUNTING USE
PANEL CUT-OUT

SPECIFICATIONS:

Material: Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contact: Copper Alloy, Tin Plated
Pin: Copper Alloy, Nickel Plated
Electrical: Rating: 15A @ 250V C-ULus
10A @ 250V ENEC & CCC & KC
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 3000 VAC for 1 minute
Environmental: Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

IEC MALE INLET, FLANGED PANEL MOUNT
RIGHT ANGLE, PCB TAILS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				HOLDERS			
INCHES				HOLDERS			
.X				.X			
.XX				.XX			
.XXX				.XXX			
APPROVALS				DATE			
DRAWN				SS			
CHECKED				7/10/07			
APPROVED				X			
REF: S00087C				SCALE: NTS			
SHEET 1 OF 1				REV: A			