


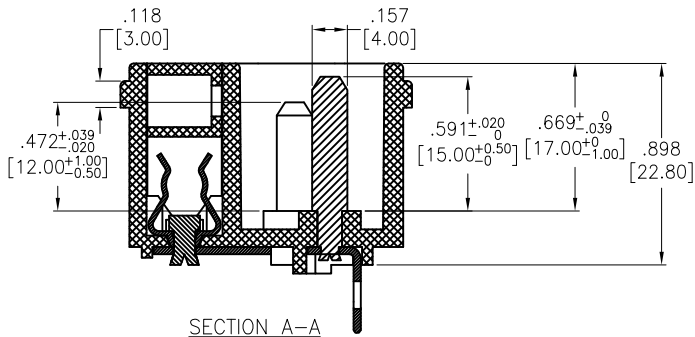
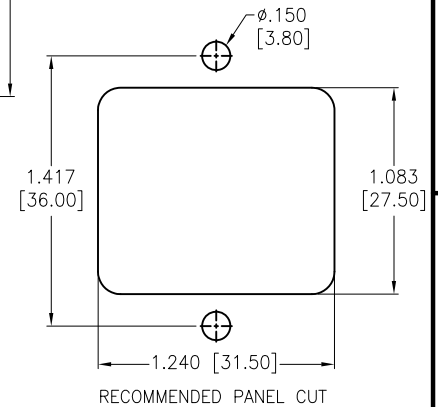
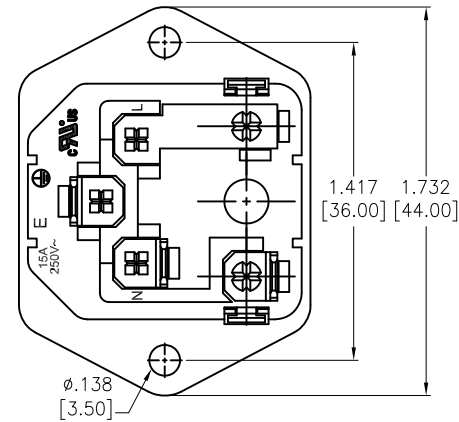
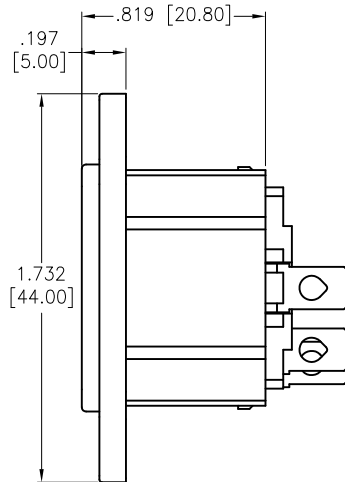


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/17/05	
A		CHANGE TERMINAL	8/15/08	
B		REDRAWN	01/23/13	
C		UPDATE DRAWING	8/5/20	LH/LX

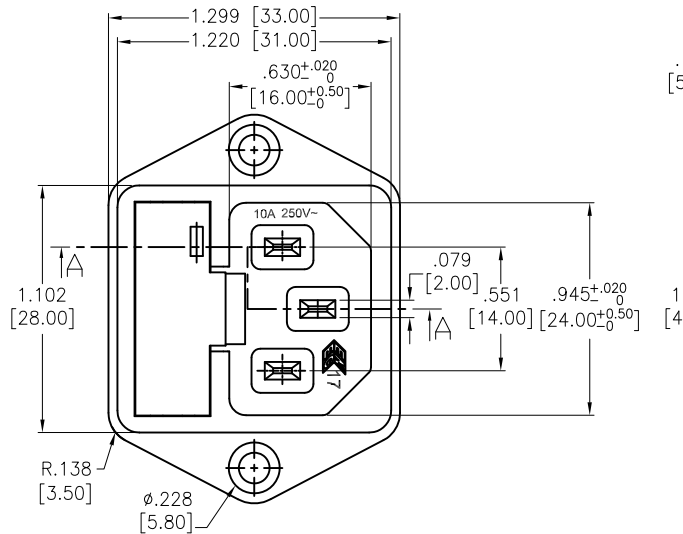

TERMINAL OPTIONS		
-1	-2	-3
.187 Q.C.	.250 Q.C.	.157 Solder

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Plating:

Tin over Copper underplate overall

Electrical:

Current rating: C-ULus: 15A @ 250V

ENEC: 10A @ 250V

Insulation resistance: 100 Mohms min @ 500 VDC

Dielectric withstanding voltage: 3,000 VAC for 1 minute

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS		DATE
DRAWN	SS	6/17/05
CHECKED		
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
IEC MALE INLET, SCREW ON PANEL MOUNT
5 x 20mm FUSE HOLDER

SIZE	PART NO.	REV.
X	IEC-F-X	C
REF:	S00087C	SCALE: NTS
SHEET 1 OF 1		