

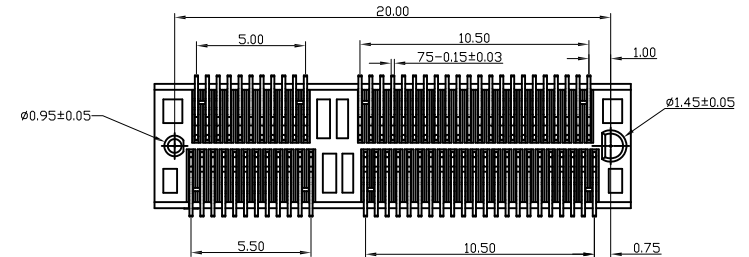


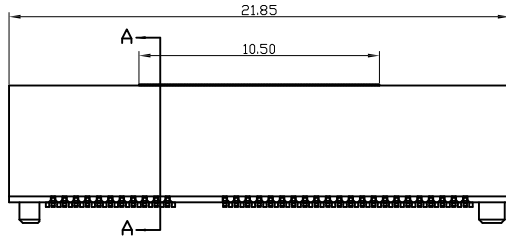
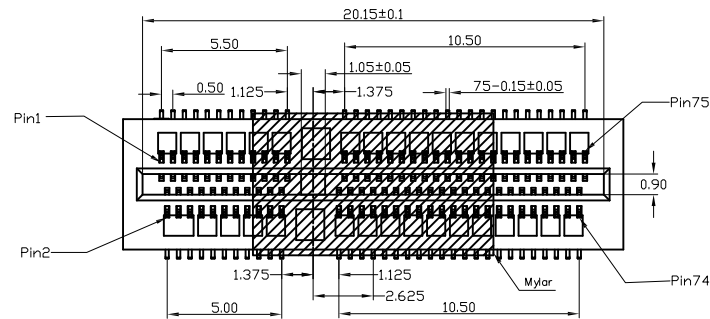


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/17/21	
A		ADDED PACKING	12/10/21	WX/RC
B		UPDATE SPEC.	12/28/21	WX/RC

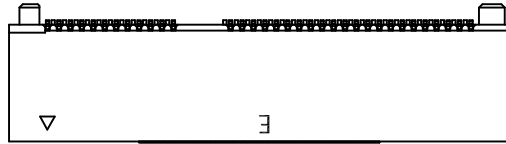

Bottom View

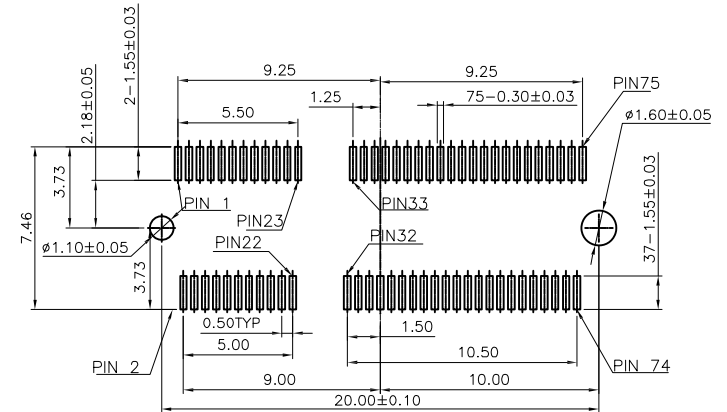

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator Color: Black

Contacts Pin: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage rating: 50 VAC

Current rating: 0.5A Per Pin

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 200 VAC for 1 minute

Mechanical:

PCB Thickness: 0.8mm

Durability: 25-60 cycles

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

MM
.X ± .35
.XX ± .20

ANGLE
± 3°

DRAWN	JJ	11/17/21
CHECKED	TL	11/17/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
M.2 CONNECTOR, 67PINS, SMT TYPE,
VERTICAL 5.30MM HEIGH MYLAR+REEL

SIZE X	PART NO. M2-J-67-V-SMT-5.30-KE-KT-T/R	REV. B
REF: S00059T	SCALE: NTS	SHEET 1 OF 2

APPROVED: _____

DATE: _____ TITLE: _____

Rev


AWO #

Description

Date _____

Appr

SEE SHT 1 OF 2 FOR REVISION

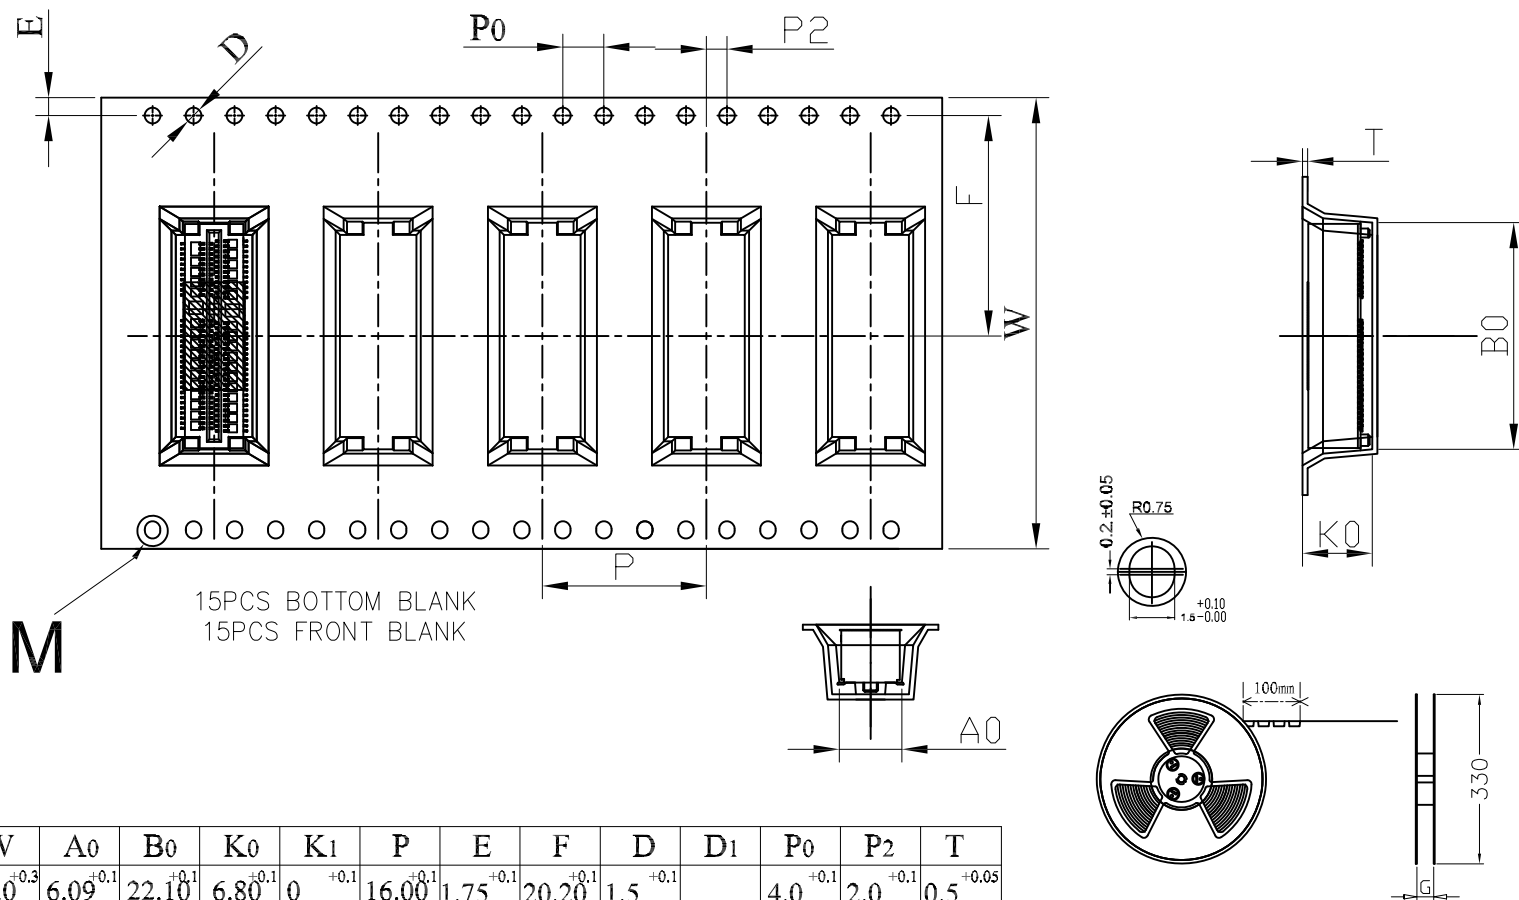

ITEM	W	A ₀	B ₀	K ₀	K ₁	P	E	F	D	D ₁	P ₀	P ₂	T
DIM	44.0 ^{+0.3} _{-0.3}	6.09 ^{+0.1} _{-0.1}	22.10 ^{+0.1} _{-0.1}	6.80 ^{+0.1} _{-0.1}	0 ^{+0.1} _{-0.1}	16.00 ^{+0.1} _{-0.1}	1.75 ^{+0.1} _{-0.1}	20.20 ^{+0.1} _{-0.1}	1.5 ^{+0.1} _{-0.0}		4.0 ^{+0.1} _{-0.1}	2.0 ^{+0.1} _{-0.1}	0.5 ^{+0.05} _{-0.05}

NOTE:

- 1.10 sprocket hole pitch cumulative tolerance ± 0.2
- 2.Carrier camber is 1mm in 100mm
- 3.A0 and B0 measured on a plane 0.3mm above the bottom of the pocket
- 4.K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier
- 5.All dimensions meet EIA-481-2 requirements
6. 22" IR= M 13" IR= 10.08M 600PCS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

	MM	
.X	±	.35
.XX	±	.20

ANGLE
 $\pm 3^\circ$

DRAWN

JJ

11/17/21

CHECKED

T

11/17/21

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

M.2 CONNECTOR, 67PINS, SMT TYPE,
VERTICAL 5.30MM HEIGH MYLAR+REEL

SIZE	
------	--

PART NO.

NO. M2-J-67-V-SMT-5.30-KE-KT-T/R

REV.

Б

REF: S00059T

SCALE: NTS

SHEET 2 OF 2