

Additional Resources: Product Page | 3D Model | PCB Footprint

date 09/25/2024

page 1 of 3

# MODEL: PJ-104H | DESCRIPTION: DC POWER JACK

#### **FEATURES**

- EIAJ-4 center pin
- wave solder





## **SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rated input voltage			30		Vdc
rated input current				4	А
contact resistance				30	mΩ
insulation resistance	at 500 Vdc	100			МΩ
voltage withstand	for 1 minute			500	Vac
insertion/withdrawal force		0.3		3	kg
operating temperature		-20		70	°C
storage temperature		-40		85	°C
life			5,000		cycles
flammability rating	UL94V-0				
RoHS	yes				

## **SOLDERABILITY**


parameter	conditions/description	min	typ	max	units
wave soldering	dipped in solder pot for 4~6 seconds		250		°C


# **MECHANICAL DRAWING**

units: mm tolerance: ±0.3 mm PCB: ±0.05 mm

unless otherwise specified PCB thickness: 1.6 mm

ITEM	DESCRIPTION	MATERIAL	PLATING/COLOR
1	housing	PBT4815 (UL94V-0)	black
2	terminal 1	C5210 t=0.20	8 μ" silver
3	terminal 2	C5210 t=0.25	8 μ" silver
4	terminal 3	C2680 t=0.30	8 μ" silver

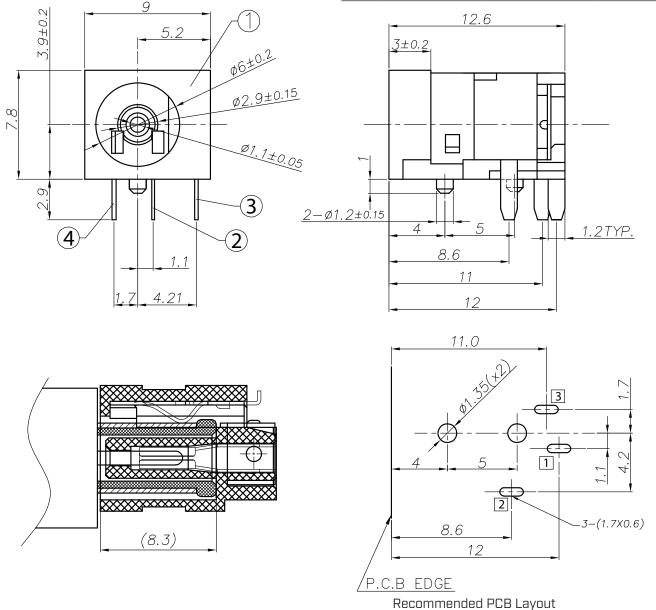



MATING PLUG Jack Insertion Depth: 8.3 mm

Schematic	01 03 02
Model	PJ-104H
Center Pin	EIAJ-4 (Ø 1 mm)

Top View

Additional Resources: Product Page | 3D Model | PCB Footprint

SAME SKY | MODEL: PJ-104H | DESCRIPTION: DC POWER JACK

**date** 09/25/2024 | **page** 3 of 3

## **REVISION HISTORY**

rev.	description	date
1.0	initial release	09/25/2024

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.