

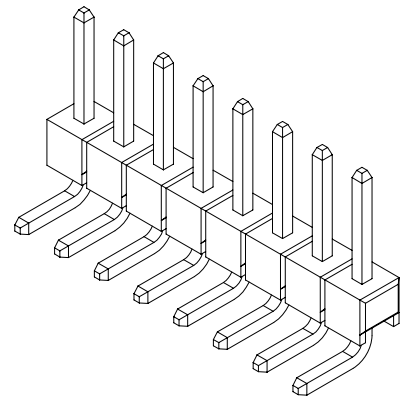


E

CUSTOMER DRAWING
ORIGINAL

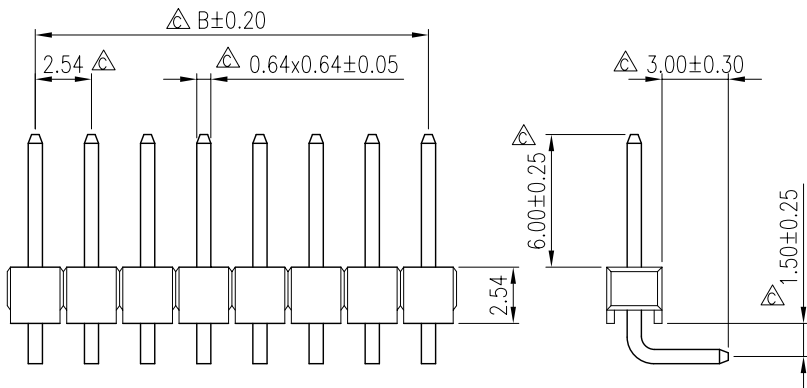


POS. #1

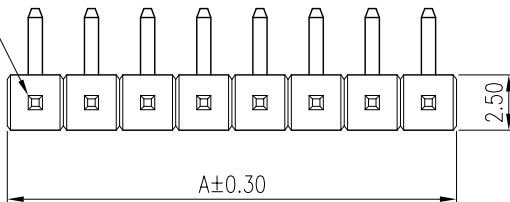

NOTES:

1. INSULATOR: LCP, UL 94V-0, COLOR- BLACK
2. CONTACT: COPPER ALLOY, "XXX"- PIN CONTACT PLATING
"005"- 15 μ " GOLD
"010"- 30 μ " GOLD
"018"- FULL GOLD FLASH
"025"- 5 μ " GOLD
"032"- FULL TIN
3. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2002/95/EC FOR RoHS.
4. PACKING IS PER AMTA PACKING SPECIFICATION PKS-0001
5. A ARE CRITICAL DIMENSIONS

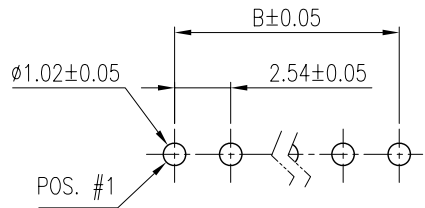

RECOMMENDED P.C.B. LAYOUT

TOLERANCE m/m		APPROVALS		DATE	TITLE			Amphenol® Amphenol Corporation Amphenol Taiwan Corporation SCALE N.A. SHEET 1 OF 1					
x.	±0.30	DRAWN	Sondra Sang	12/11/07	G801 SERIES								
x.x	±0.25	CHECKED	Chenny Yeh	12/11/07	SINGLE ROW HEADER								
x.xx	±0.15	APPROVED		Hank Hsu	12/11/07	2.54MM-PITCH							
x.xxx	±0.08					R/A PCB MOUNT							
ANGULAR	±2°												
UNLESS OTHERWISE SPECIFIED				UNIT	MM	SIZE	A4	PART NO.	G801 LQ XXX XXX EU	DWG NO.	HEAD-G801LQXXXXXXEU_1-13	REV.	A