
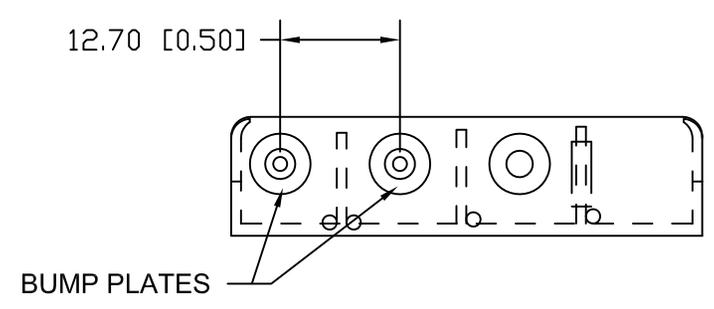


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
05/05/17	E	DIM. 61.30 WAS 61.26 DIM. 15.50 WAS 15.44 ADDED DIM. 55.0, Ø2.90	T.B.	B.S.	

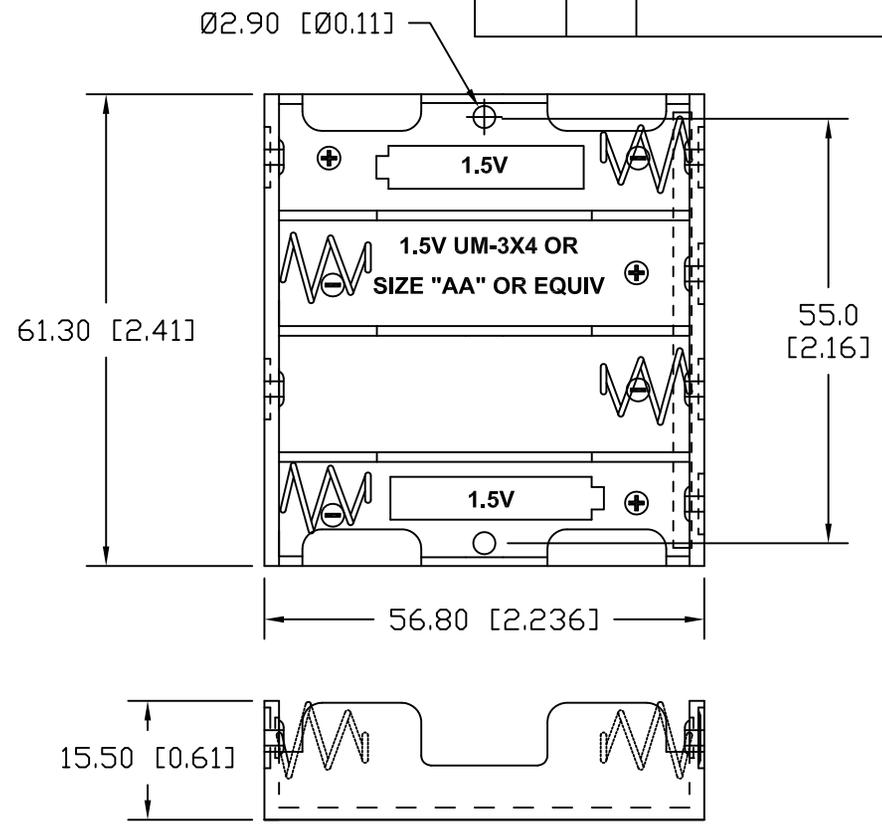

**MATERIAL:**  
HOUSING: POLYPROPYLENE  
FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959  
TEMPERATURE RANGE: -10°C to +100°C  
SPRINGS: SPRING STEEL, NICKEL PLATED  
RIVETS: BRASS, NICKEL PLATED  
CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS  
PER EIA-540J000  
ROHS COMPLIANT

Tolerance (Inches)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ±.8 (.030)	Title 4 "AA" BATTERY HOLDER		
Angular ± 3°	Date 05/05/17	Drawing Number BC4AAB	
		Approved By T.B.	