


New  
**BK1100FHU (BK-110FHB01)**  
 F size

High temperature & long life type

**U** type

■ Dimensions (with tube)

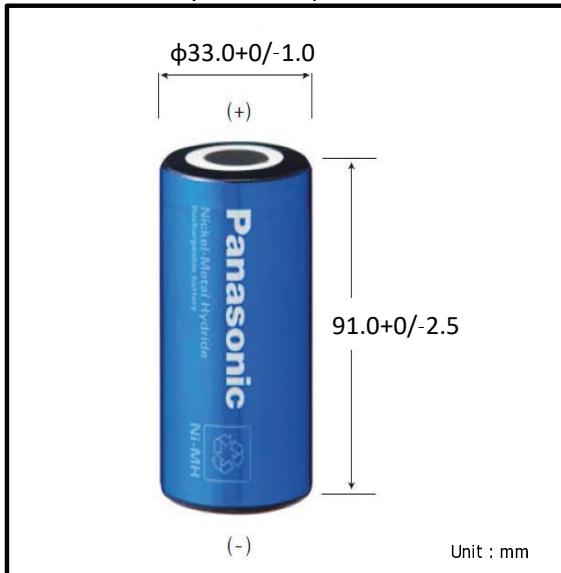

■ Specifications

|  |                    |
|--|--------------------|
| Diameter   | 33.0 +0 / -1.0 mm  |
| Height   | 91.0 +0 / -2.5 mm  |
| Approximate Weight                                     | 250g               |
| Nominal Voltage  | 1.2V               |
| Discharge*1  | Average*2          |
| Capacity   | 12000 mAh          |
| Rated (min.)   | 11000 mAh          |
| Approx. Internal Impedance at 1000Hz at charged state. | 5 mΩ               |
| Charge   | Standard           |
|  | 1100 mA X 16 hrs.  |
|  | Rapid*3            |
|  | 5500 mA X 2.4 hrs. |
|  | Low rate           |
|  | 550 mA X 32 hrs.   |
|  | 367 mA X 48 hrs.   |
| Ambient Temperature                                    | Low rate           |
|  | -20 °C to 75 °C    |
|  | Standard           |
|  | -20 °C to 65 °C    |
| Storage  | Rapid              |
|  | -20 °C to 75 °C    |
|  | <1 year            |
|  | -20 °C to 35 °C    |
|  | <6 months          |
|  | -20 °C to 45 °C    |
|  | <1 month           |
|  | -20 °C to 55 °C    |
|  | <1 week            |
|  | -20 °C to 65 °C    |

\*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It

\*2 For reference only.

\*3 Need specially designed control system. Please contact Panasonic for details.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.