



Replacement for Sanyo/Panasonic which is discontinued. But made in Japan in same factory

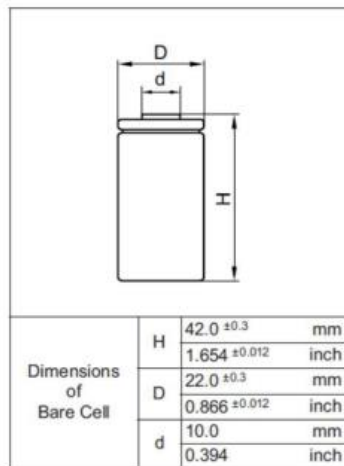


Nominal Capacity		1300mAh
Nominal Voltage		1.2V
Charging Current	Standard	130mA
	Quick	390mA
	Fast	2000mA
Charging Time	Standard	14 to 16Hrs.
	Quick	4 to 6Hrs.
	Fast	about 1Hr.
Ambient Temperature	Charge	Standard 0°C to +45°C [+32°F to 113°F]
		Quick 10°C to +45°C [+50°F to 113°F]
		Fast 5°C to +40°C [+41°F to 104°F]
	Discharge -20°C to +60°C [-4°F to 140°F]	
	Storage -30°C to +50°C [-22°F to 122°F]	
Internal Impedance (Av.) (at 50% discharge)		4.0mΩ (at 1000Hz)
Weight		51g/1.80oz
Dimensions(D)×(H) (with tube)		22.9 <sup>0</sup> <sub>-0.1</sub> × 43.0 <sup>0</sup> <sub>-1.2</sub> mm
		0.90 <sup>0</sup> <sub>-0.04</sub> × 1.69 <sup>0</sup> <sub>-0.05</sub> inch

### Typical Characteristics

Charge (5 sells pack)

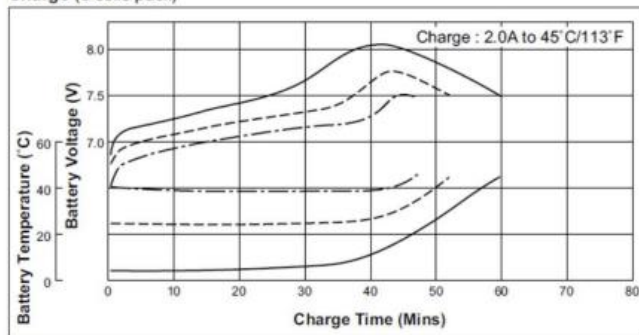


Discharge (at high rate)

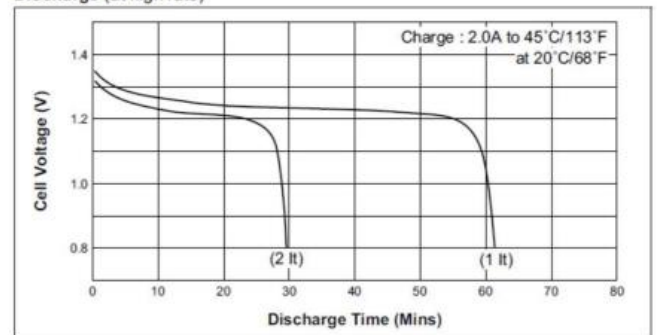


Cell Capacity (at various discharge rate)



Discharge (at high rate)

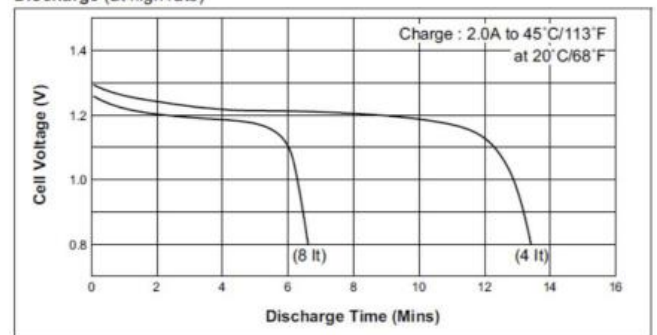

Discharge (at low rate)

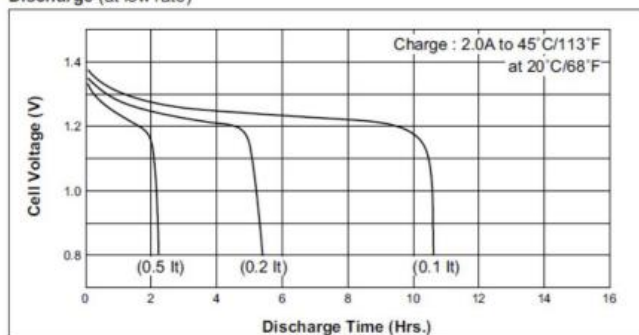

Temperature (Charge & Discharge)

