

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description




Date

Appr


-

RELEASED

8/11/16

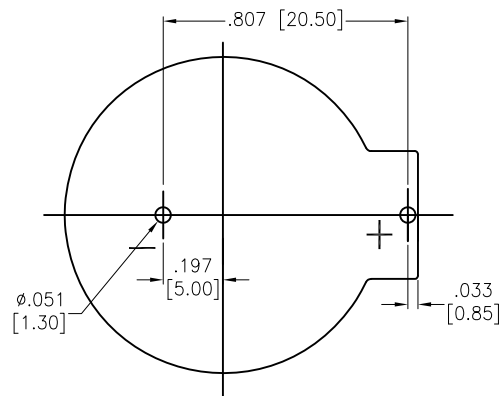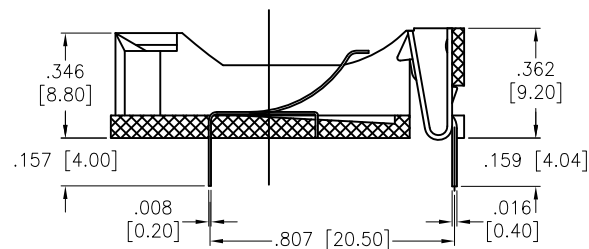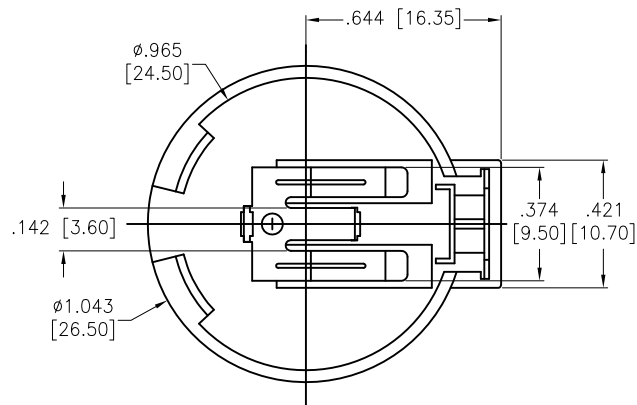

RECOMMENDED PCB LAYOUT

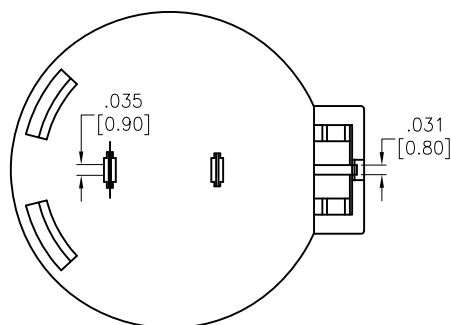

SPECIFICATIONS:

Material:

Housing: PBT, Glass reinforced, rated UL94V-0, Color: Black

Contact: Phosphor Bronze, Nickel plated

Electrical:

Contact resistance: 30 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric Voltage: 500 VAC one sec level

Temperature Rating:

Operating temperature: -25°C to +85°C.

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DATE

DRAWN

HR

8/11/16

CHECKED

LW

8/11/16

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

BATTERY HOLDER, PCB THRU HOLE
FOR CR2450, BLACK COLOR

SIZE

X

PART NO.

BH-32E-1

REV.

-

REF: S00136C

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1