

6

5

4

3




2

1


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description | Date    | Appr |
|-----|-------|-------------|---------|------|
| -   |       | RELEASED    | 3/18/20 |      |

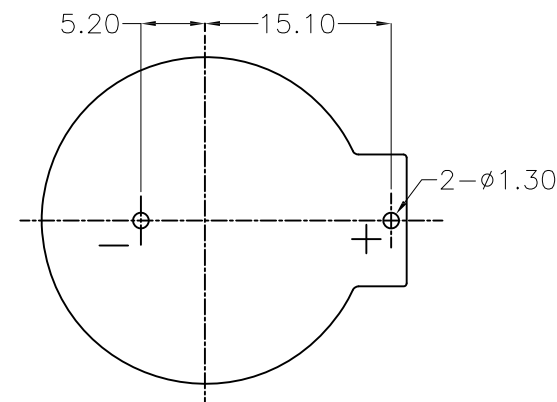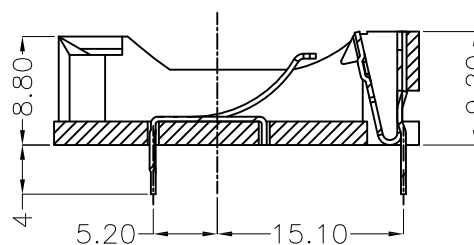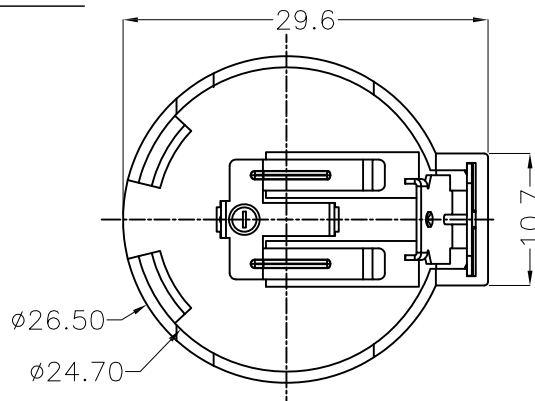

RECOMMENDED PCB LAYOUT

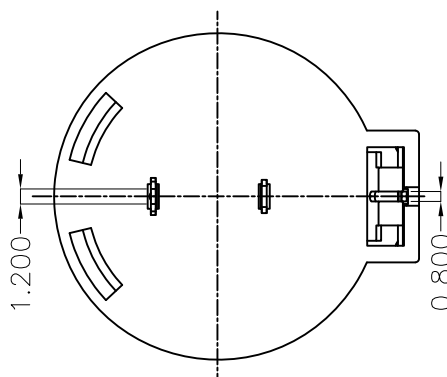

## SPECIFICATIONS:

## Material:

Housing: PBT, rated UL94V-0, Color: Black

Contact: Phosphor Bronze, Nickel Plated

## Electrical:

Contact resistance: 30 Milliohms max

Insulation resistance: 1,000 Megaohms ohms min

Dielectric Voltage: 500 VAC @ sea level

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE MILLIMETERS  
TOLERANCES: EXCEPT AS NOTED  
MM ANGLE

X ± 0.30 X ± 1°  
X.X ± 0.25 X.X ± 0.5°  
X.XX ± 0.20  
X.XXX ± 0.10

| APPROVALS |    | DATE    |
|-----------|----|---------|
| DRAWN     | LH | 3/18/20 |
| CHECKED   | MY | 3/18/20 |
| APPROVED  |    |         |

**ADAM**  
**TECH**  
**INTERCONNECTS**

909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

TITLE BATTERY HOLDER, PCB THRU HOLE  
FOR 2450, DIP TYPE

|              |                      |              |
|--------------|----------------------|--------------|
| SIZE<br>X    | PART NO.<br>BH-32H-1 | REV.<br>-    |
| REF: S00136C | SCALE: NTS           | SHEET 1 OF 1 |