
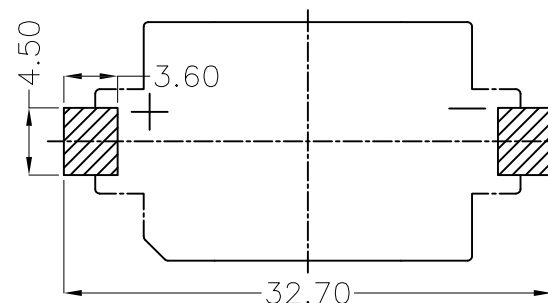
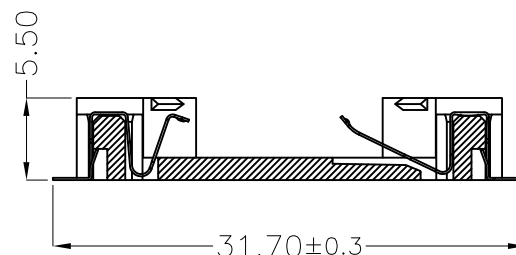




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/30/15	
A		UPDATE DRAWING	1/15/19	AY/YC
B		UPDATE DRAWING	4/9/20	LH/OC

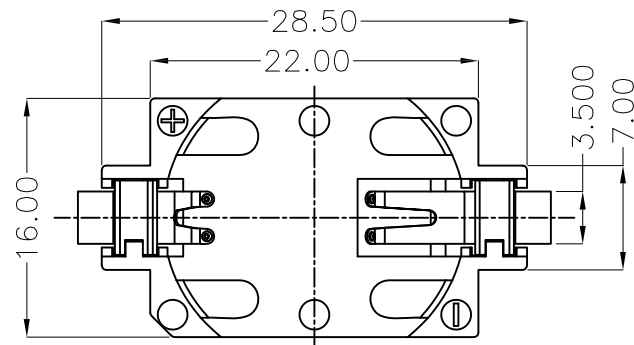

RECOMMENDED P.C.B LAYOUT

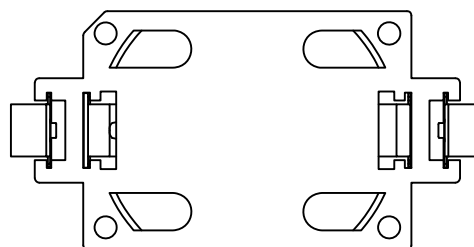

SPECIFICATIONS:

Material:

Housing: Hi-Temp Thermoplastic, rated UL94V-0, Color: White

Contact: Phosphor Bronze, Gold plated

Electrical:

Contact resistance: 30 Milliohms max

Insulation resistance: 1,000 Megaohms ohms min

Dielectric Voltage: 500 VAC @ sea level

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
MM ANGLE
X ± 0.30 X ± 1°
X.X ± 0.25 X.X ± 0.5°
X.XX ± 0.20
X.XXX ± 0.10

APPROVALS		DATE
DRAWN	AY	4/9/20
CHECKED	NC	4/9/20
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
COIN CELL BATTERY HOLDER FOR
CELL CR2032, SMT TYPE

SIZE X	PART NO. BH-49A-5	REV. B
-----------	----------------------	-----------

REF: S00136C SCALE: NTS SHEET 1 OF 1