

6

5

4

3






2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description | Date    | Appr |
|-----|-------|-------------|---------|------|
| -   |       | RELEASED    | 3/19/20 |      |

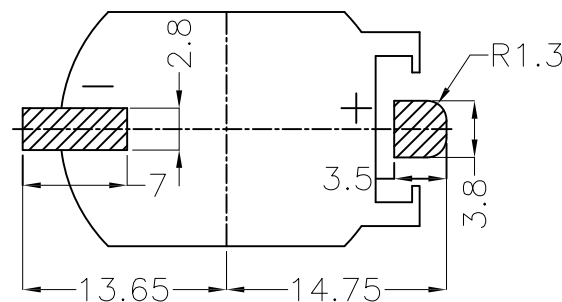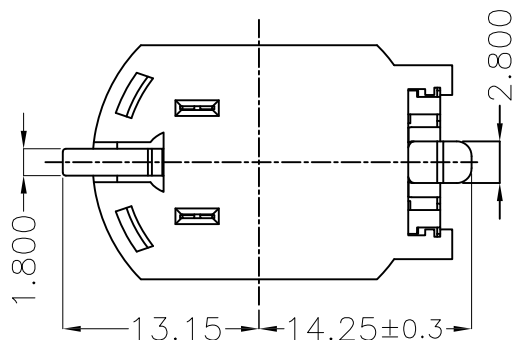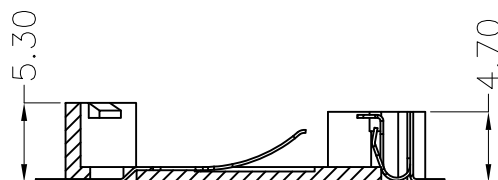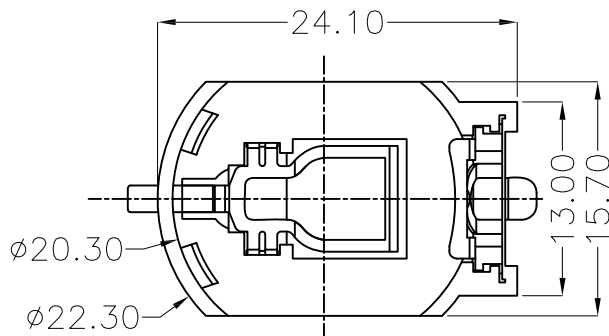

RECOMMENDED PCB LAYOUT

## SPECIFICATIONS:

## Material:

Housing: Hi-temp thermoplastic, Color: Brown

Contact: Phosphor Bronze, Gold plated

## Electrical:

Contact resistance: 30 mohms max

Insulation resistance: 1,000 Megaohms ohms min

Dielectric Voltage: 500 VAC one sec level

Temperature Rating:

Operating temperature: -25°C to +85°C

## Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE MILLIMETERS  
TOLERANCES: EXCEPT AS NOTED  
MM ANGLE

|       |        |     |        |
|-------|--------|-----|--------|
| X     | ± 0.30 | X   | ± 1°   |
| X.X   | ± 0.25 | X.X | ± 0.5° |
| X.XX  | ± 0.20 |     |        |
| X.XXX | ± 0.10 |     |        |

**ADAM**  
**TECH**  
**INTERCONNECTS**

909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

| APPROVALS |    | DATE    |
|-----------|----|---------|
| DRAWN     | LH | 3/19/20 |
| CHECKED   | MY | 3/19/20 |
| APPROVED  |    |         |

|              |          |                                                           |     |
|--------------|----------|-----------------------------------------------------------|-----|
| TITLE        |          | BATTERY HOLDER, SURFACE MOUNT,<br>FOR CR2032, BROWN COLOR |     |
| SIZE         | PART NO. | REV.                                                      |     |
| X            | BH-74F-5 | -                                                         |     |
| REF:         | S00136C  | SCALE:                                                    | NTS |
| SHEET 1 OF 1 |          |                                                           |     |