





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/30/15	
A		UPDATE DRAWING	3/18/20	LH/MY

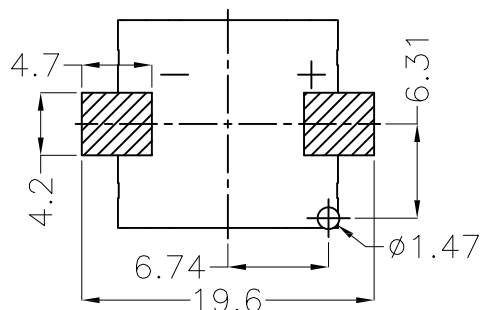

RECOMMENDED PCB LAYOUT

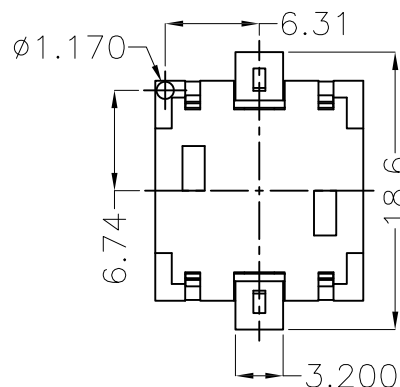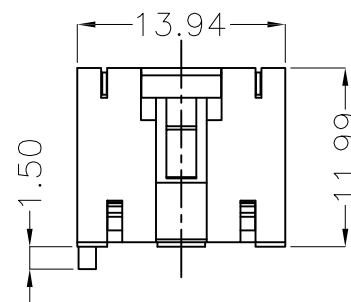

PART NO.	MATERIAL
BH-82-5-1A	PBT, BLACK
BH-82-5-1B	PA66, BLACK
BH-82-5-2A	PPA, BROWN
BH-82-5-2B	PPA, BLACK
BH-82-5-3A	PPS, BROWN
BH-82-5-3B	PPS, BLACK
BH-82-5-4A	LCP, WHITE
BH-82-5-4B	LCP, BLACK

SPECIFICATIONS:

Material:

Housing: (See chart)

Housing Color: (See chart)

Contact: Phosphor Bronze, Gold Plated

Electrical:

Contact resistance: 30 Milliohms max

Insulation resistance: 1,000 Megaohms ohms min

Dielectric Voltage: 500 VAC one sec level

Temperature Rating:

Operating temperature: -25°C to +85°C.

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
MM ANGLE
X ± 0.30 X ± 1°
X.X ± 0.25 X.X ± 0.5°
X.XX ± 0.20
X.XXX ± 0.10

APPROVALS		DATE
DRAWN	HR	8/17/15
CHECKED	NC	8/17/15
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE			
BATTERY HOLDER, SMT TYPE, FOR TWO AG13 / LR44 COIN CELL			
SIZE X	PART NO. BH-82-5-XX	REV. A	
REF: S00136C	SCALE: NTS	SHEET 1 OF 1	