
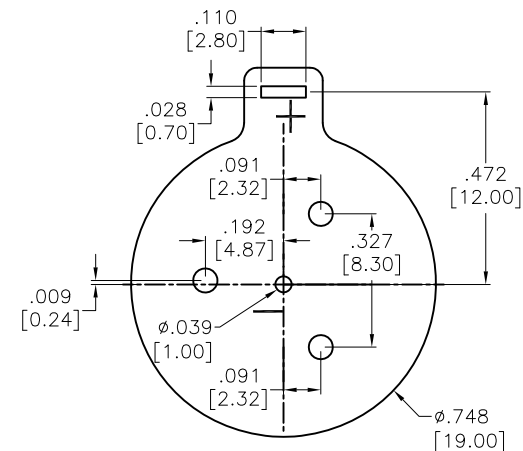
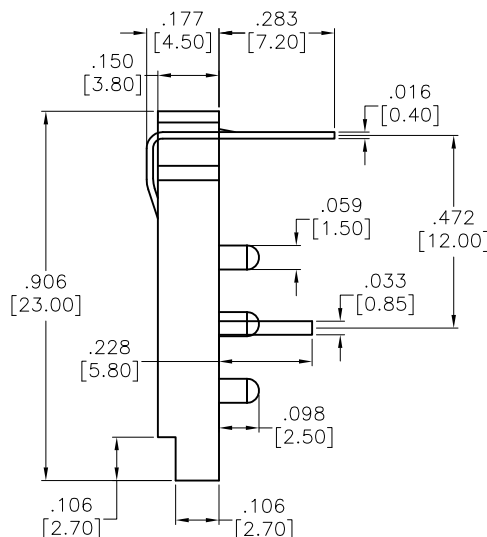


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/1/17	

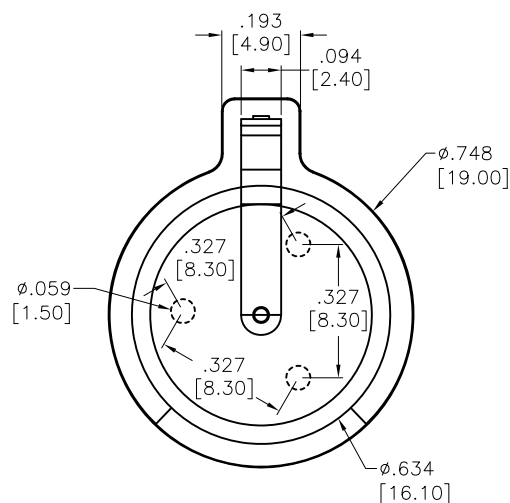

RECOMMENDED PCB LAYOUT

**SPECIFICATIONS:**

**Material:**

Housing: PBT, rated UL94V-0

Housing Color: Black

Contact: Mn Steel, Brass, Nickel plated

**Plating:**

**Electrical:**

Contact resistance: 30 Milliohms max

Insulation resistance: 1,000 Megaohms min

Dielectric Voltage: 500 VAC one sec level

**Temperature Rating:**

Operating temperature: -25°C to +85°C.

**Environmental:**

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			<b>ADAM TECH</b> INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS DRAWN AY 12/1/17 CHECKED KC 12/1/17 APPROVED			DATE DATE DATE			TITLE COIN CELL BATTERY HOLDER FOR CELL CR1620, DIP TYPE
SIZE X		PART NO. BH-94A-1		REV. -		
REF: S00136C		SCALE: NTS		SHEET 1 OF 1		