
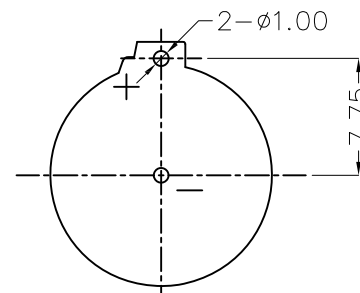





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/2/17	
A		UPDATE DRAWING	3/18/20	LH/MY

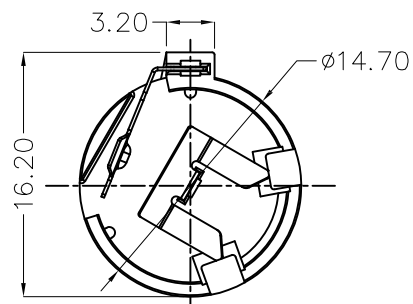

RECOMMENDED PCB LAYOUT

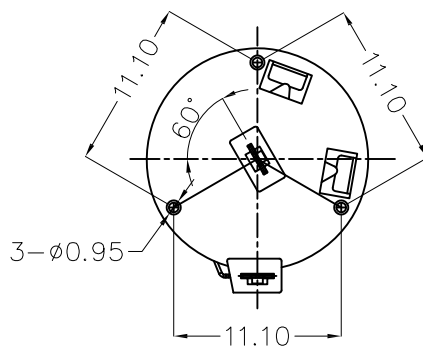

SPECIFICATIONS:

Material:

Housing: PBT, rated UL94V-0, Color: Black

Contact: Phosphor Bronze, Nickel plated

Electrical:

Contact resistance: 30 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric Voltage: 500 VAC one sec level

Temperature Rating:

Operating temperature: -25°C to +85°C.

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
MM ANGLE
X ± 0.30 X ± 1°
X.X ± 0.25 X.X ± 0.5°
X.XX ± 0.20
X.XXX ± 0.10

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

APPROVALS		DATE
DRAWN	AY	8/2/17
CHECKED	MY	8/2/17
APPROVED		

TITLE BATTERY HOLDER, DIP TYPE, FOR CR1220 BLACK COLOR, REVERSE		
SIZE X	PART NO. BH-98R-1	REV. A
REF: S00136C	SCALE: NTS	SHEET 1 OF 1