STRADA-2X2-ME-WIDE1

Beam with excellent longitudinal luminance uniformity fulfilling EN13201 M-class requirements where road width is equal to or less than the pole height. Added house-side backlight.

SPECIFICATION:

Dimensions	50.0 x 50.0
Height	8.9 mm
Fastening	glue, pin, screw
ROHS compliant	yes

MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
STRADA-2X2-ME-WIDE1	Multi-lens	PMMA	clear		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C14164_STRADA-2X2-ME-WIDE1 » Box size: 480 x 280 x 300 mm	800	160	160	8.6

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

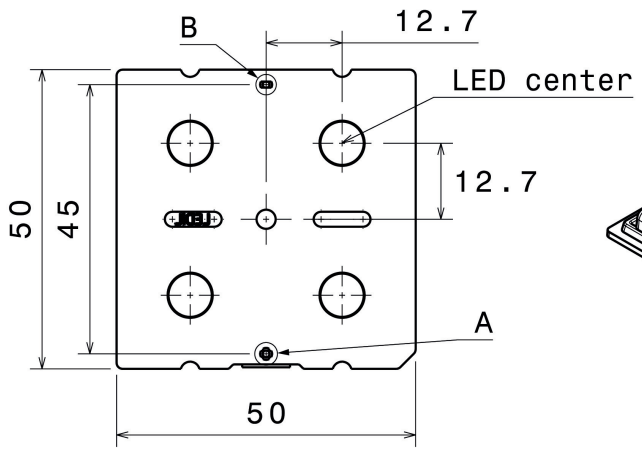

Bottom view

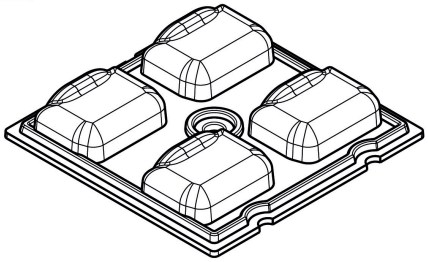

Isometric view

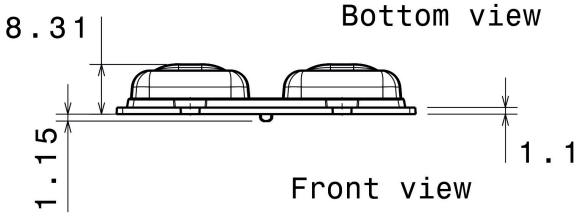

Front view

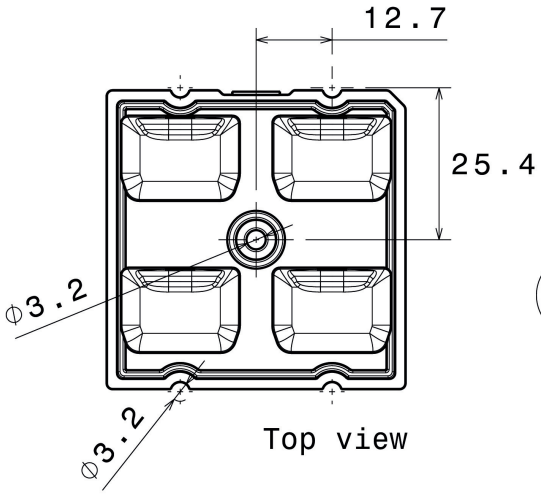

Top view



Detail B



Detail A

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

THIRD ANGLE PROJECTION:

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

DRAWING TITLE
STRADA-2X2-ME-WIDE1

SIZE	PART NUMBER		
A4	C14164		
SCALE 1:1	WEIGHT -		SHEET 1/1

See also our general installation guide: www.ledil.com/installation_guide

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

CREE LEDs

LED	XD16
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.7 cd/lm
LEDs/each optic	4
Light colour/type	White
Required components:	

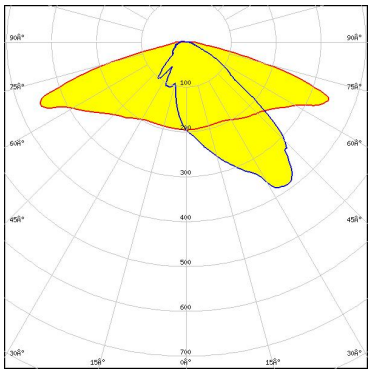

Light distribution files

CREE LEDs

LED	XP-G
FWHM / FWTM	Asymmetric
Efficiency	86 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

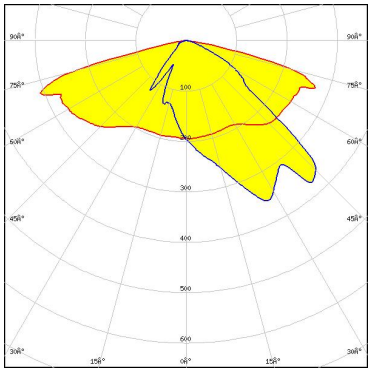

Light distribution files

CREE LEDs

LED	XP-G2
FWHM / FWTM	Asymmetric
Efficiency	83 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

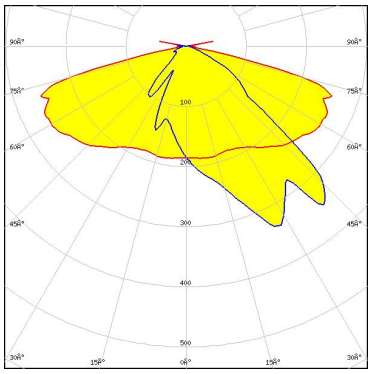

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

CREE LEDs

LED	XP-G3
FWHM / FWTM	Asymmetric
Efficiency	78 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White

Required components:
C17677_STRADA-2X2-SHD-BLK

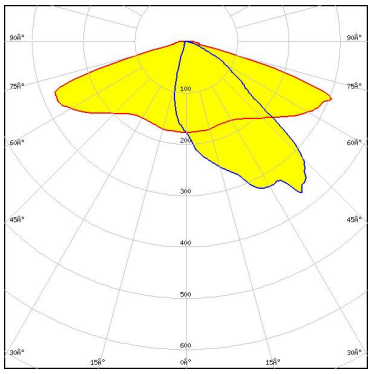

Light distribution files

CREE LEDs

LED	XP-G3
FWHM / FWTM	Asymmetric
Efficiency	90 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White

Required components:
C17580_STRADA-2X2-SHD-WHT

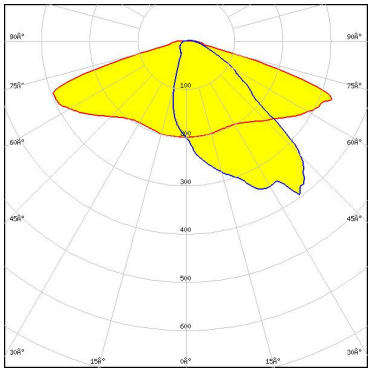

Light distribution files

CREE LEDs

LED	XP-G3
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White

Required components:

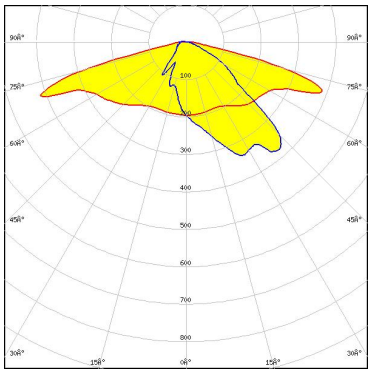

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

CREE LEDs

LED	XP-L HD
FWHM / FWTM	Asymmetric
Efficiency	83 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

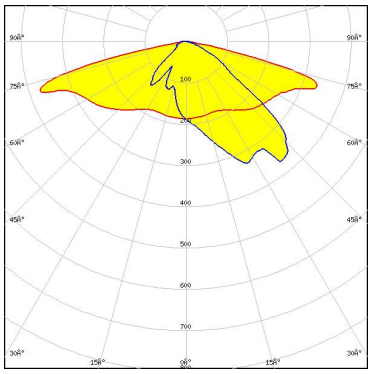

Light distribution files

CREE LEDs

LED	XP-L2
FWHM / FWTM	Asymmetric
Efficiency	85 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

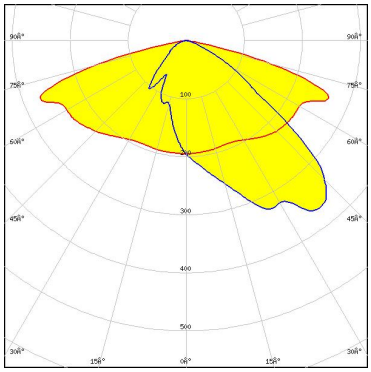

Light distribution files

ELECTRIO

LED	EHP-2x8-3535
FWHM / FWTM	Asymmetric
Efficiency	97 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

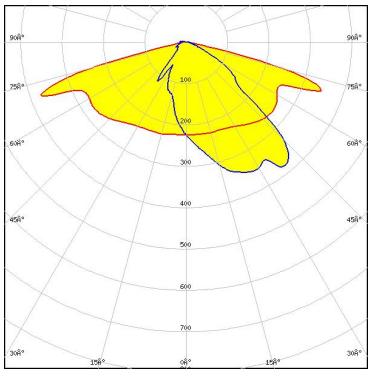

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

inventronics

LED	PL-BRICK HP 3800 2x8 SSG
FWHM / FWTM	Asymmetric
Efficiency	96 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

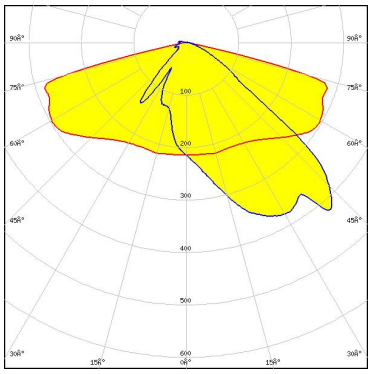

Light distribution files

inventronics

LED	PrevaLED Brick HP 2x8
FWHM / FWTM	Asymmetric
Efficiency	86 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

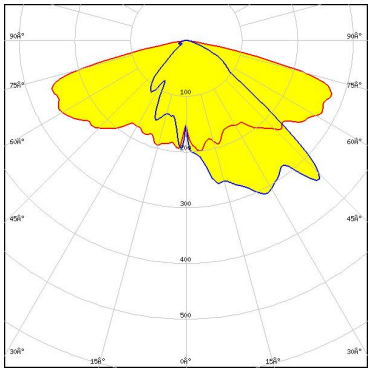

Light distribution files

LUMILEDS

LED	LUXEON TX
FWHM / FWTM	Asymmetric
Efficiency	84 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

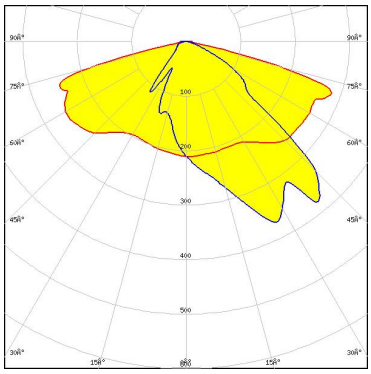

Protective plate, glass

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

LUMILEDS

LED	LUXEON V
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

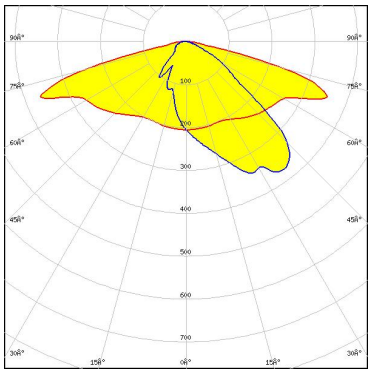

Light distribution files

MST Your solutions

LED	RecLED 122x50mm 1900lm 730 2x4 Opt G1
FWHM / FWTM	Asymmetric
Efficiency	97 %
Peak intensity	1.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

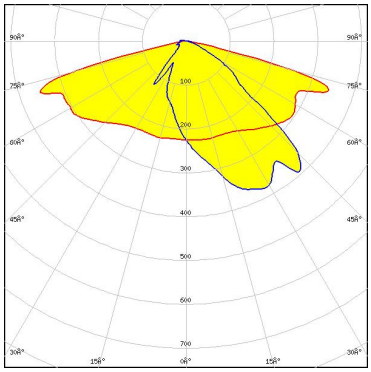

Light distribution files

NICHIA

LED	NVSW219F
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

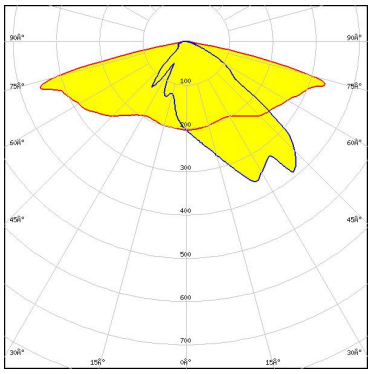

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

NICHIA

LED	NVSW319B
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

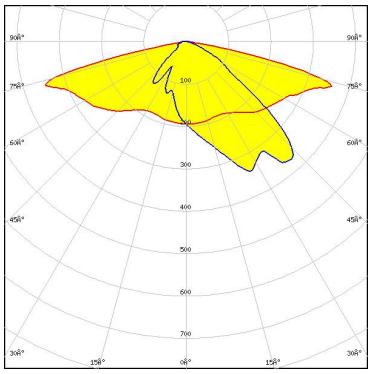

Light distribution files

NICHIA

LED	NVSW3x9A
FWHM / FWTM	Asymmetric
Efficiency	86 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

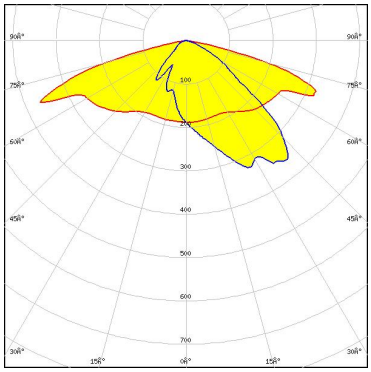

Light distribution files

OSRAM
Opto Semiconductors

LED	OSLON Square CSSRM2/CSSRM3
FWHM / FWTM	Asymmetric
Efficiency	86 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

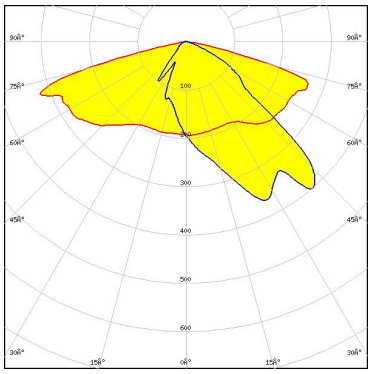

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

OSRAM
Opto Semiconductors

LED	OSLON Square PC
FWHM / FWTM	Asymmetric
Efficiency	84 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

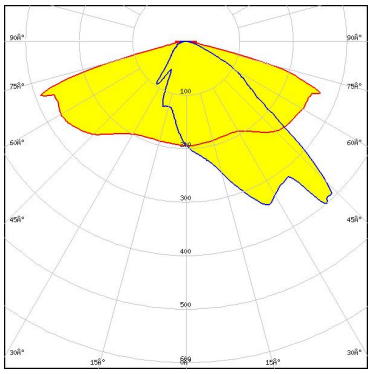

Protective plate, glass

Light distribution files

PHILIPS

LED	Fortimo FastFlex LED 2x8 DA G4
FWHM / FWTM	Asymmetric
Efficiency	86 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

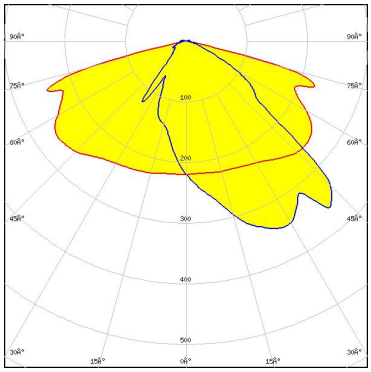

Protective plate, glass

Light distribution files

PHILIPS

LED	Fortimo FastFlex LED 2x8 DA G4+
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

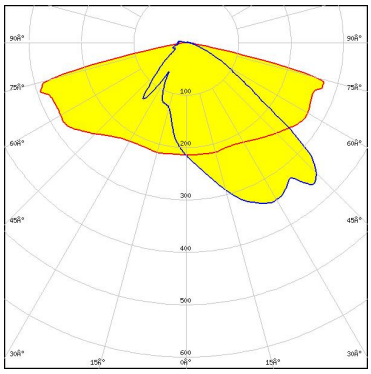

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

PHILIPS

LED	Fortimo FastFlex LED 2x8 DA G5
FWHM / FWTM	Asymmetric
Efficiency	97 %
Peak intensity	1.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

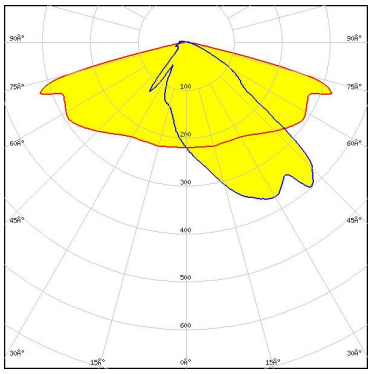

Light distribution files

PHILIPS

LED	Fortimo FastFlex LED 2x8 DAX G4
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

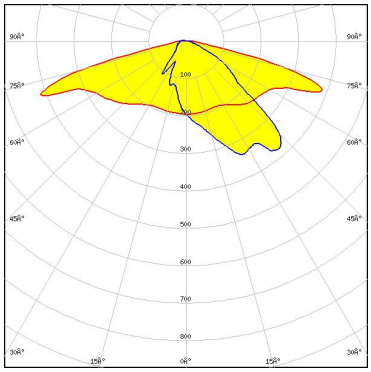

Light distribution files

SAMSUNG

LED	HiLOM RC12 Z (LH181B)
FWHM / FWTM	Asymmetric
Efficiency	98 %
Peak intensity	1.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

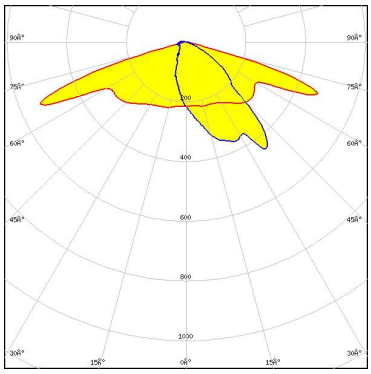

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

SAMSUNG

LED	HiLOM RH16 (LH351C)
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

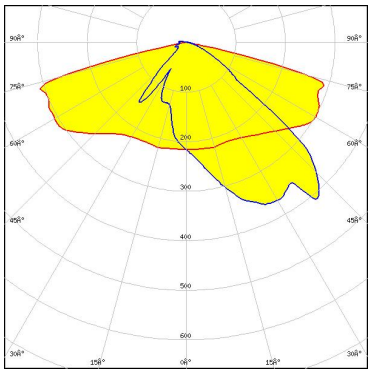

Light distribution files

SAMSUNG

LED	LH351B
FWHM / FWTM	Asymmetric
Efficiency	87 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

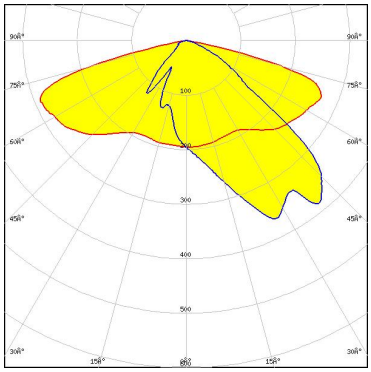

Protective plate, glass

Light distribution files

SAMSUNG

LED	LH351B
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

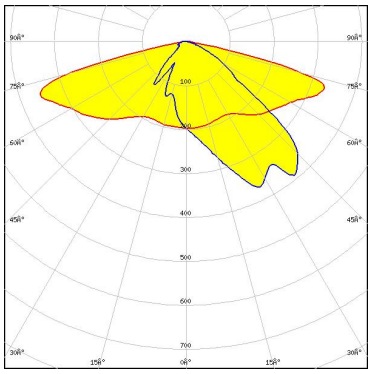

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

LED	LED-Pa-L15c2W11c2-xxx-C050-01
FWHM / FWTM	Asymmetric
Efficiency	98 %
Peak intensity	1.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

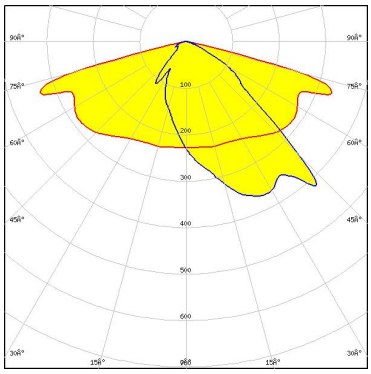

Light distribution files

LED	Z5M3
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

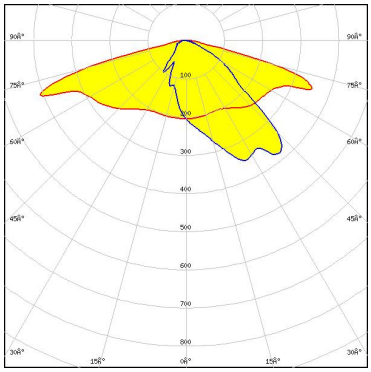

Light distribution files

LED	Z5M4
FWHM / FWTM	Asymmetric
Efficiency	98 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

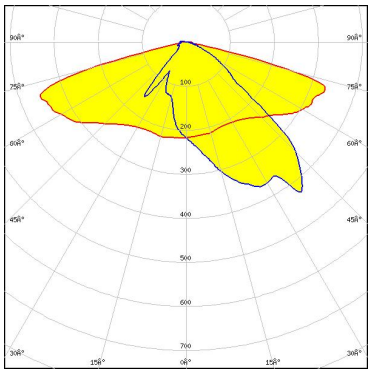

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

SEOUL SEMICONDUCTOR

LED	Z8Y22
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

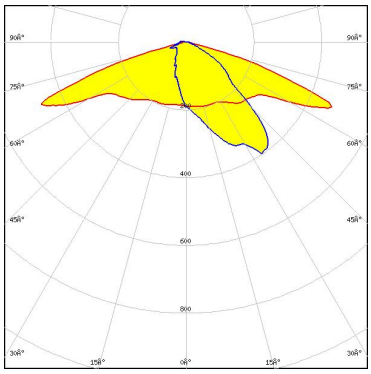

Light distribution files

TOSHIBA
Leading Innovation

LED	TL1L4
FWHM / FWTM	Asymmetric
Efficiency	83 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

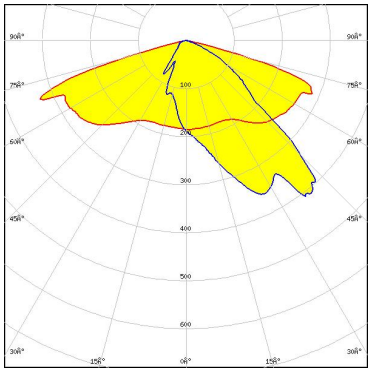

Protective plate, glass

Light distribution files

TRIDONIC

LED	RLE 2x4 2000lm HP EXC2 OTD
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

TRIDONIC

LED	RLE 2x8 4000lm HP EXC2 OTD
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

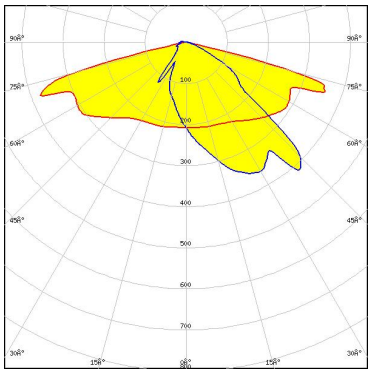

Light distribution files

TRIDONIC

LED	RLE G1 49x121mm 2000lm xxx EXC OTD
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.2 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

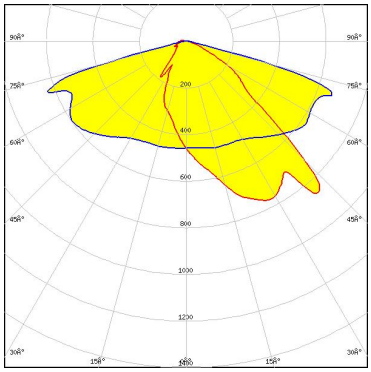

Light distribution files

TRIDONIC

LED	RLE G1 49x133mm 2000lm xxx EXC OTD
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.2 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

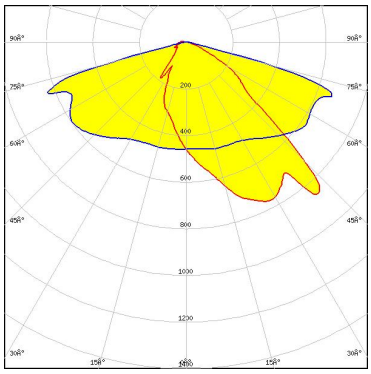

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (MEASURED):

TRIDONIC

LED	RLE G1 49x223mm 4000lm xxx EXC OTD
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.2 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

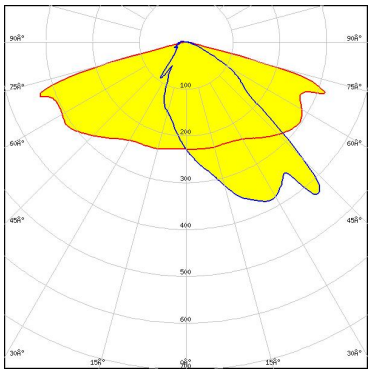

Light distribution files

TRIDONIC

LED	RLE G1 49x245mm 4000lm xxx EXC OTD
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.2 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

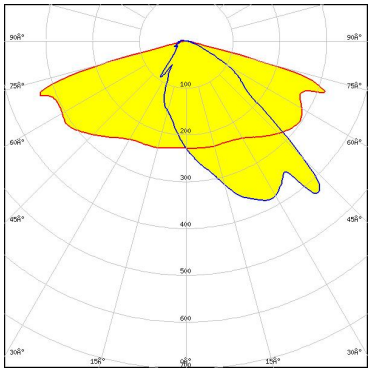

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

bridgelux

LED	SMD 3535 BXEX-XXX-11H-3B1
FWHM / FWTM	Asymmetric
Efficiency	96 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

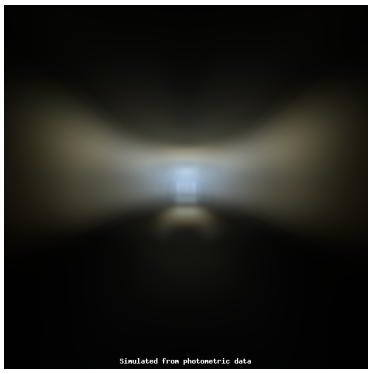

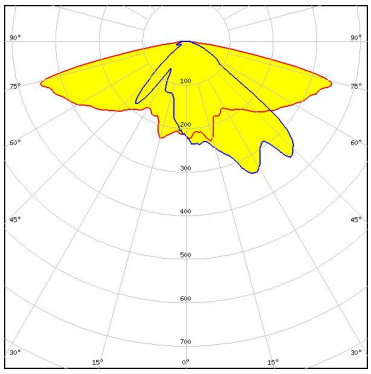

Light distribution files

bridgelux

LED	SMD 3535 BXEX-XXX-11H-3B1
FWHM / FWTM	Asymmetric
Efficiency	82 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

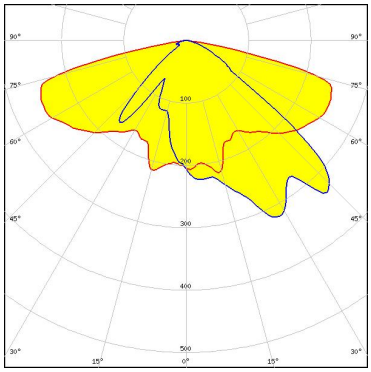

Protective plate, glass

Light distribution files

CREE LEDs

LED	XHP35 HD
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

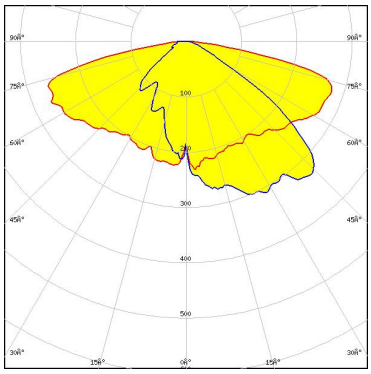

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

CREE LEDs

LED	XHP35 HI
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

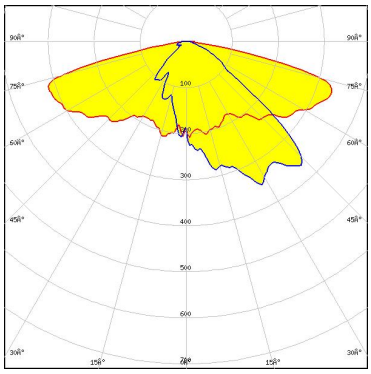

Light distribution files

CREE LEDs

LED	XP-G2
FWHM / FWTM	Asymmetric
Efficiency	80 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

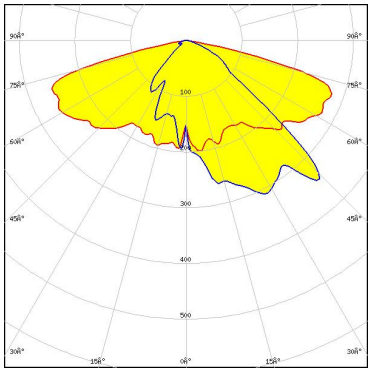

Light distribution files

CREE LEDs

LED	XP-G2 HE
FWHM / FWTM	Asymmetric
Efficiency	92 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

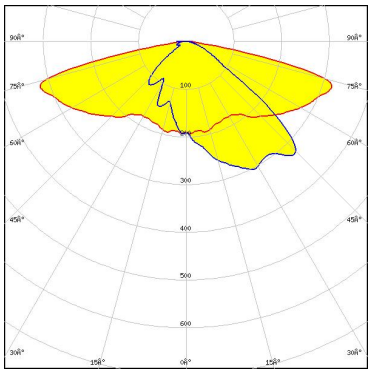

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

CREE LEDs

LED	XP-G3
FWHM / FWTM	Asymmetric
Efficiency	76 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C17580_STRADA-2X2-SHD-WHT	

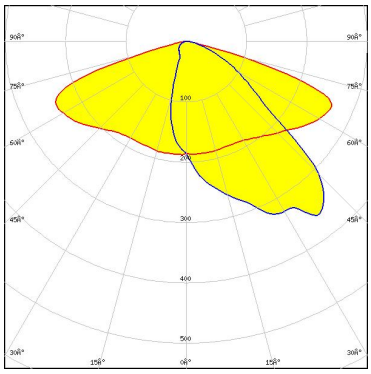

Light distribution files

Protective plate, glass

CREE LEDs

LED	XP-G3
FWHM / FWTM	Asymmetric
Efficiency	78 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

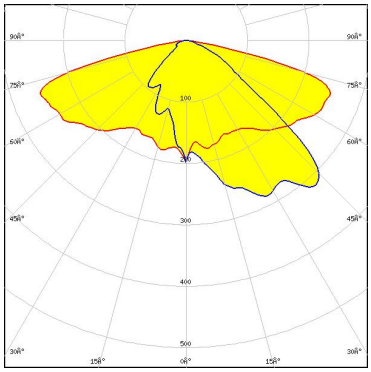

Light distribution files

Protective plate, glass

CREE LEDs

LED	XP-G4
FWHM / FWTM	Asymmetric
Efficiency	97 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

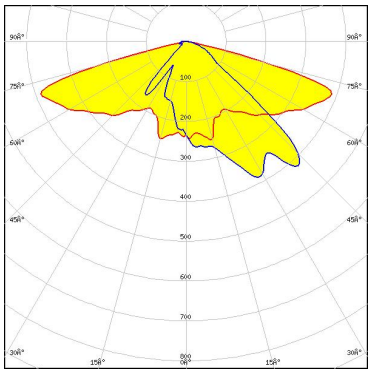

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

CREE LEDs

LED	XP-G4
FWHM / FWTM	Asymmetric
Efficiency	84 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

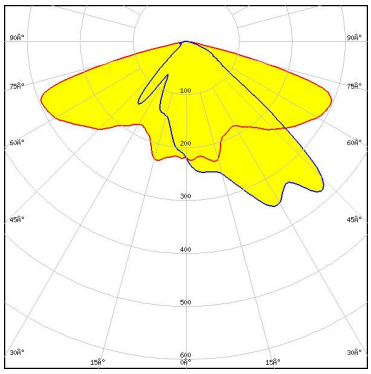

Protective plate, glass

Light distribution files

CREE LEDs

LED	XP-L HI
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

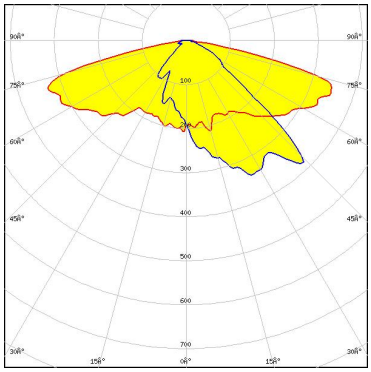

Light distribution files

CREE LEDs

LED	XP-L2
FWHM / FWTM	Asymmetric
Efficiency	80 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

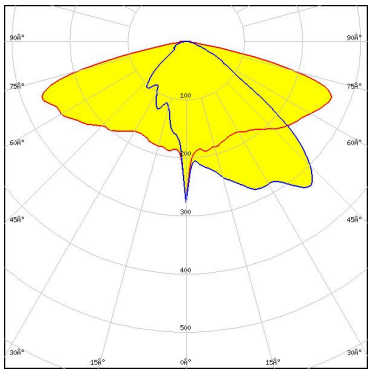

Protective plate, glass

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

CREE LEDs

LED	XT-E
FWHM / FWTM	Asymmetric
Efficiency	84 %
LEDs/each optic	1
Light colour/type	White
Required components:	

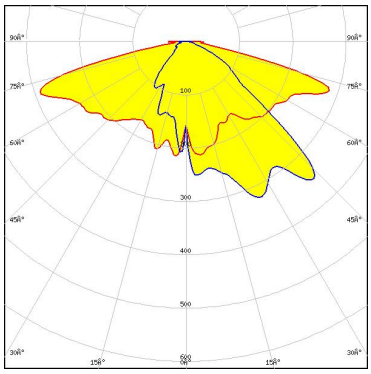

Protective plate, glass

Light distribution files

LUMILEDS

LED	LUXEON 3030 2D (Round LES)
FWHM / FWTM	Asymmetric
Efficiency	82 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

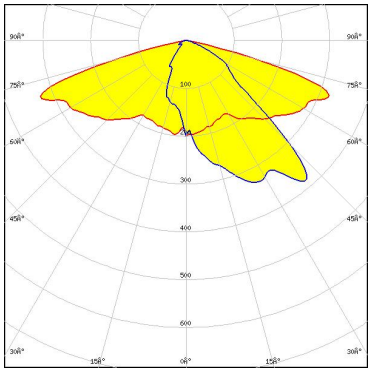

Light distribution files

LUMILEDS

LED	LUXEON HL2X
FWHM / FWTM	Asymmetric
Efficiency	81 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

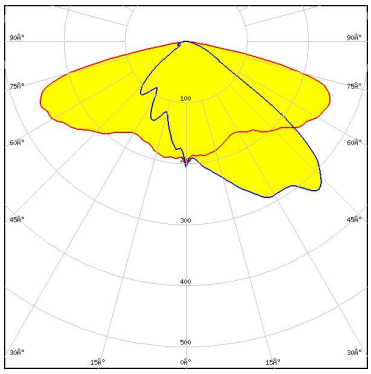

Protective plate, glass

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

LUMILEDS

LED	LUXEON HL2X-V
FWHM / FWTM	Asymmetric
Efficiency	97 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

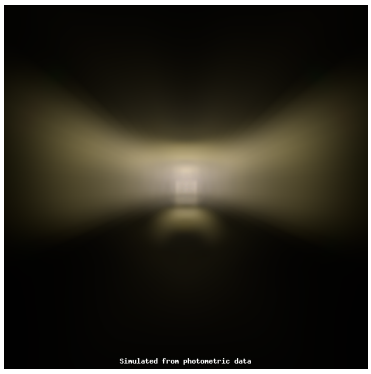

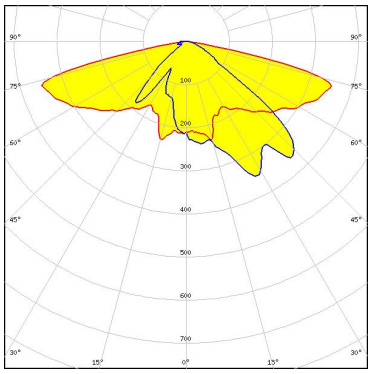

Light distribution files

LUMILEDS

LED	LUXEON HL2X-V
FWHM / FWTM	Asymmetric
Efficiency	82 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

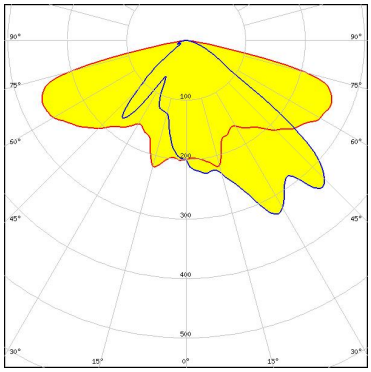

Light distribution files

LUMILEDS

LED	LUXEON HL4X
FWHM / FWTM	Asymmetric
Efficiency	81 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

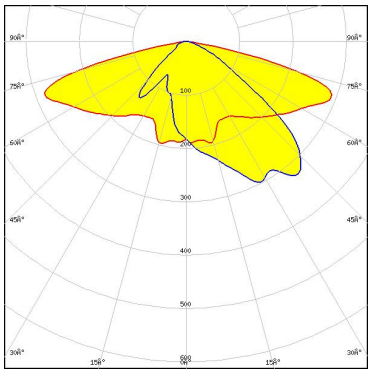

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

LUMILEDS

LED	LUXEON HL4X
FWHM / FWTM	Asymmetric
Efficiency	96 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

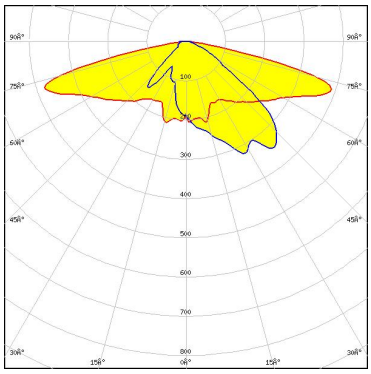

Light distribution files

LUMILEDS

LED	LUXEON T
FWHM / FWTM	Asymmetric
Efficiency	84 %
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

Light distribution files

LUMILEDS

LED	LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)
FWHM / FWTM	Asymmetric
Efficiency	96 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

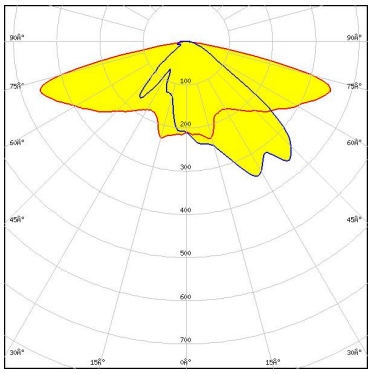

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

LUMILEDS

LED	LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)
FWHM / FWTM	Asymmetric
Efficiency	82 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

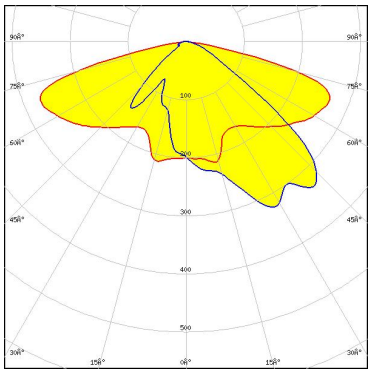

Protective plate, glass

Light distribution files

NICHIA

LED	NF2x757G
FWHM / FWTM	Asymmetric
Efficiency	82 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

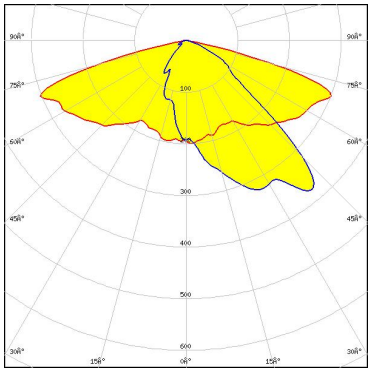

Protective plate, glass

Light distribution files

NICHIA

LED	NV4WB35AM
FWHM / FWTM	Asymmetric
Efficiency	95 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

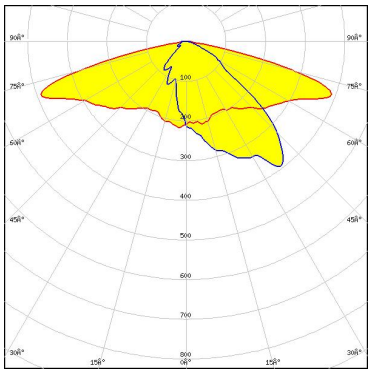

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

NICHIA

LED	NVSW219F
FWHM / FWTM	Asymmetric
Efficiency	82 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

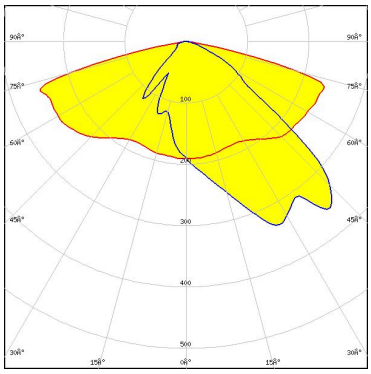

Protective plate, glass

Light distribution files

NICHIA

LED	NVSW3x9A
FWHM / FWTM	Asymmetric
Efficiency	93 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

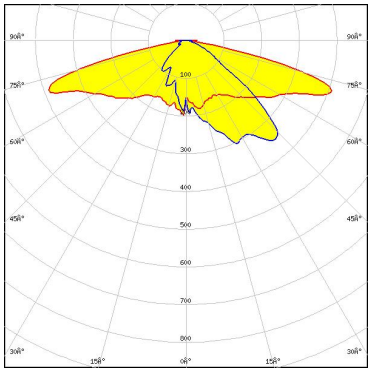

Light distribution files

NICHIA

LED	NVSW519A
FWHM / FWTM	Asymmetric
Efficiency	83 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

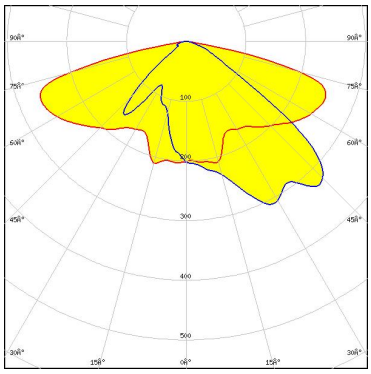

Protective plate, glass

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

NICHIA

LED	NVSW519A
FWHM / FWTM	Asymmetric
Efficiency	93 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

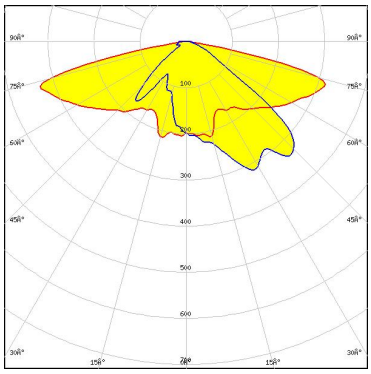

Light distribution files

NICHIA

LED	NVSxE21A
FWHM / FWTM	Asymmetric
Efficiency	81 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

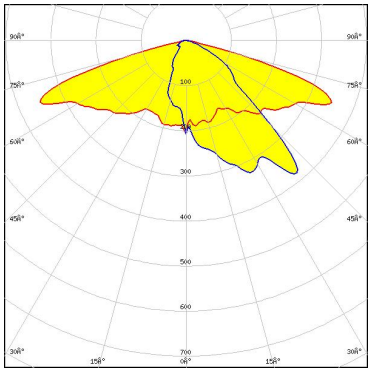

Protective plate, glass

Light distribution files

NICHIA

LED	NVSxx19B/NVSxx19C
FWHM / FWTM	Asymmetric
Efficiency	82 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

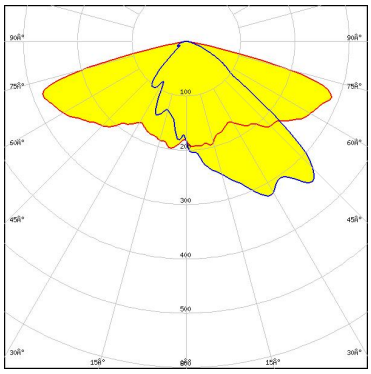

Protective plate, glass

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

NICHIA

LED	NVSxx19B/NVSxx19C
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

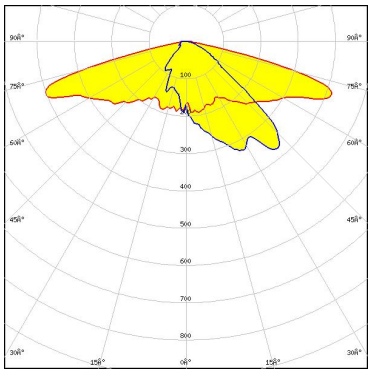

Light distribution files

OSRAM
Opto Semiconductors

LED	OSCONIQ P 3737 (2W version)
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

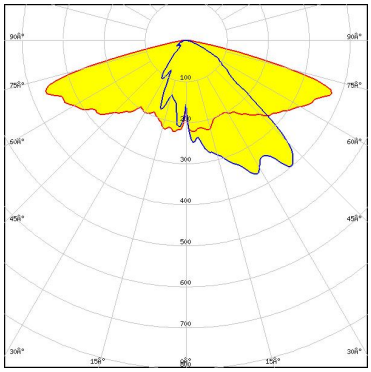

Light distribution files

OSRAM
Opto Semiconductors

LED	OSCONIQ P 3737 (3W version)
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

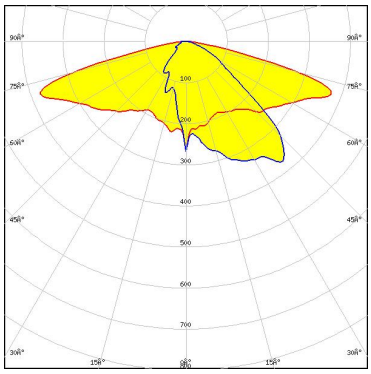

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors

LED	OSLON Square CSSRM2/CSSRM3
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

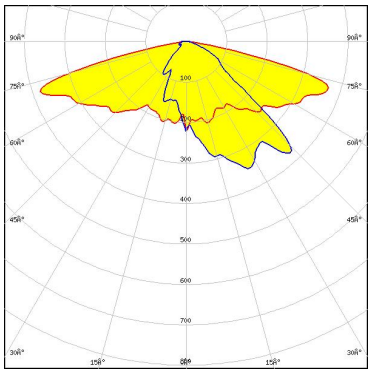

Light distribution files

OSRAM
Opto Semiconductors

LED	OSLON Square CSSRM2/CSSRM3
FWHM / FWTM	Asymmetric
Efficiency	73 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C17580_STRADA-2X2-SHD-WHT	

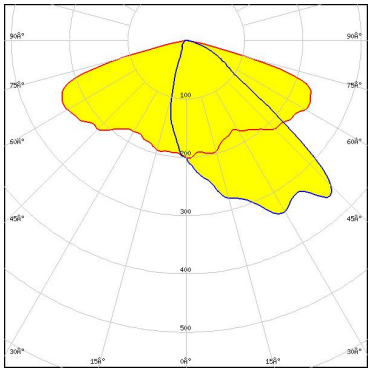

Light distribution files

Protective plate, glass

OSRAM
Opto Semiconductors

LED	OSLON Square CSSRM2/CSSRM3
FWHM / FWTM	Asymmetric
Efficiency	78 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C17677_STRADA-2X2-SHD-BLK	

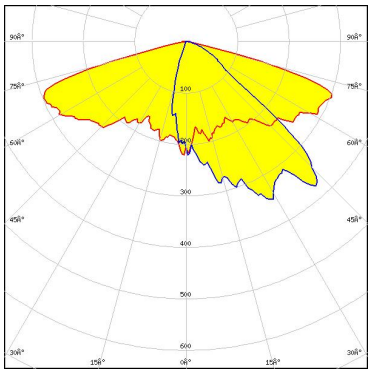

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors

LED	OSLON Square CSSRM2/CSSRM3
FWHM / FWTM	Asymmetric
Efficiency	69 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C17677_STRADA-2X2-SHD-BLK	

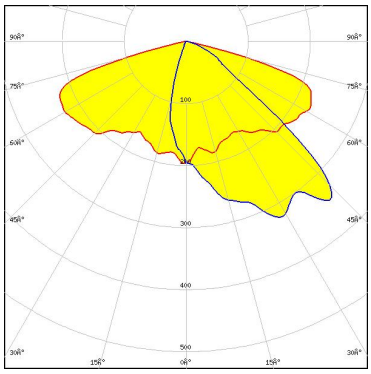

Light distribution files

Protective plate, glass

OSRAM
Opto Semiconductors

LED	OSLON Square CSSRM2/CSSRM3
FWHM / FWTM	Asymmetric
Efficiency	84 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C17580_STRADA-2X2-SHD-WHT	

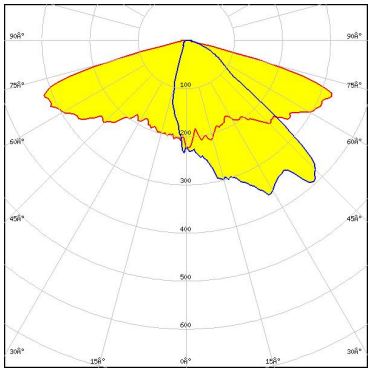

Light distribution files

OSRAM
Opto Semiconductors

LED	OSLON Square CSSRM2/CSSRM3
FWHM / FWTM	Asymmetric
Efficiency	80 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

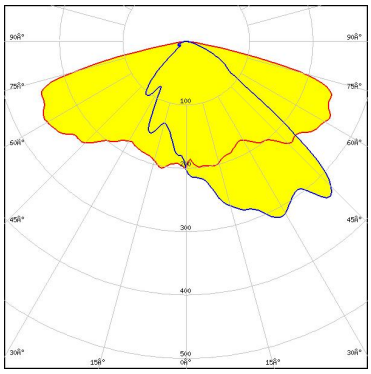

Protective plate, glass

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

PHILIPS

LED	Fortimo FastFlex LED 2x8 DA (U)HE
FWHM / FWTM	Asymmetric
Efficiency	97 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

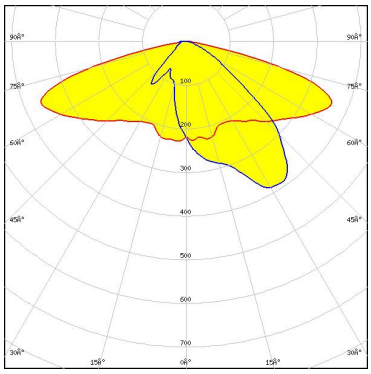

Light distribution files

PHILIPS

LED	Fortimo FastFlex LED 2x8 DA (U)HE
FWHM / FWTM	Asymmetric
Efficiency	83 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

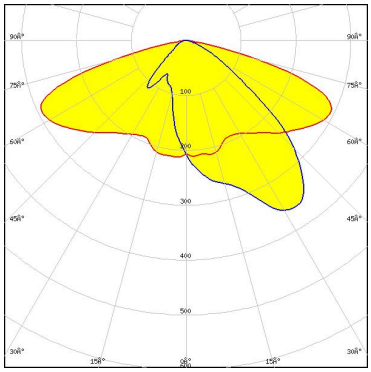

Protective plate, glass

Light distribution files

PHILIPS

LED	Fortimo FastFlex LED 2x8 DA G5
FWHM / FWTM	Asymmetric
Efficiency	84 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

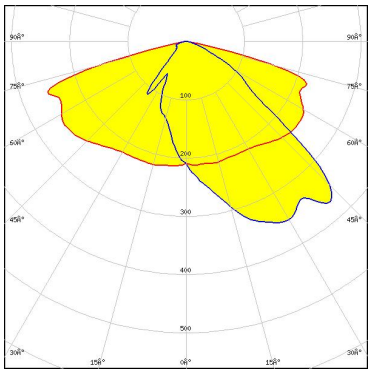

Protective plate, glass

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED	HiLOM RH16 (LH351C)
FWHM / FWTM	Asymmetric
Efficiency	84 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

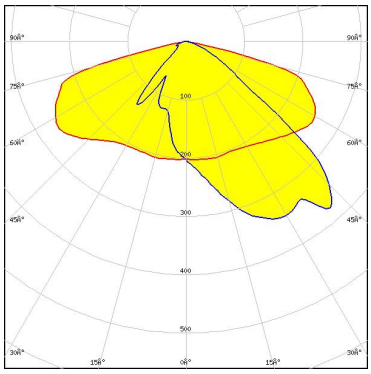

Protective plate, glass

Light distribution files

SAMSUNG

LED	LH351D
FWHM / FWTM	Asymmetric
Efficiency	76 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

Light distribution files

SEOUL SEMICONDUCTOR

LED	Z5M3
FWHM / FWTM	Asymmetric
Efficiency	82 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

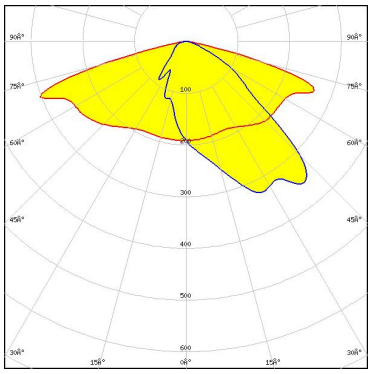

Protective plate, glass

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

SEOUL SEMICONDUCTOR

LED	Z5M3-E1
FWHM / FWTM	Asymmetric
Efficiency	97 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

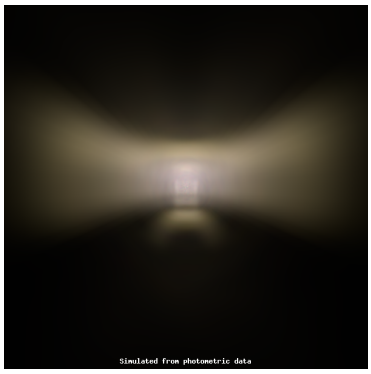

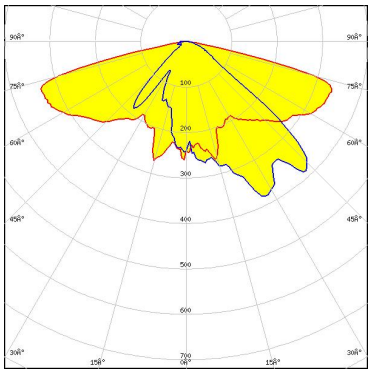

Light distribution files

SEOUL SEMICONDUCTOR

LED	Z5M3-E1
FWHM / FWTM	Asymmetric
Efficiency	84 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

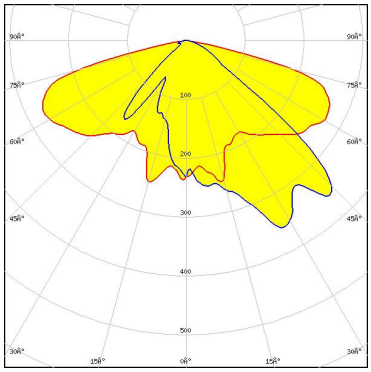

Light distribution files

SEOUL SEMICONDUCTOR

LED	Z5M4
FWHM / FWTM	Asymmetric
Efficiency	83 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

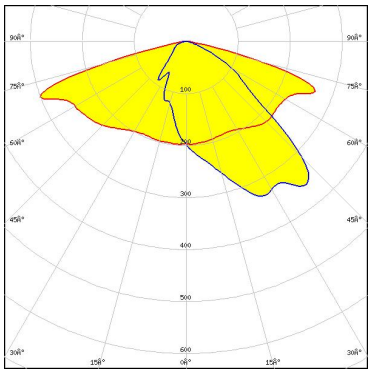

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

SEOUL SEMICONDUCTOR

LED	Z5M5
FWHM / FWTM	Asymmetric
Efficiency	96 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

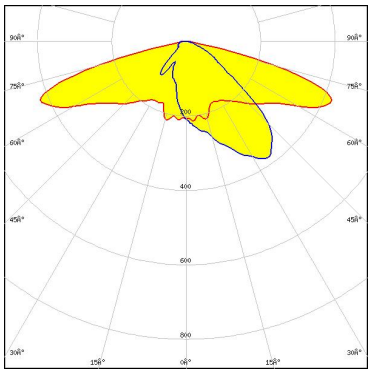

Light distribution files

SEOUL SEMICONDUCTOR

LED	Z5M5
FWHM / FWTM	Asymmetric
Efficiency	82 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

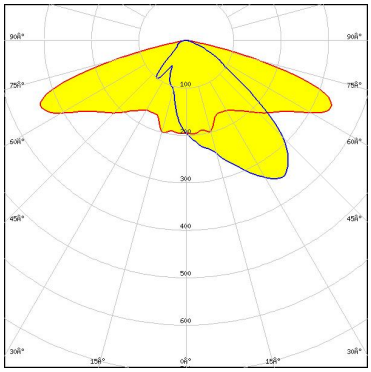

Light distribution files

TRIDONIC

LED	RLE 2x8 4000lm HP EXC2 OTD
FWHM / FWTM	Asymmetric
Efficiency	81 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	
C17677_STRADA-2X2-SHD-BLK	

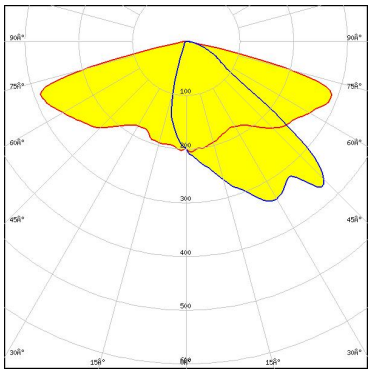

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

OPTICAL RESULTS (SIMULATED):

TRIDONIC

LED	RLE 2x8 4000lm HP EXC2 OTD
FWHM / FWTM	Asymmetric
Efficiency	84 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

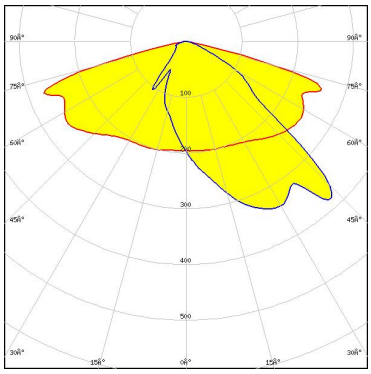

Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy
Joensuunkatu 7
FI-24240 SALO
Finland

LEDiL Inc.
228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.
405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support
www.ledil.com/where_to_buy

Shipping locations
Poznan, Poland
Hong Kong, China

Distribution Partners
www.ledil.com/where_to_buy

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.