

ZORYA-SC-B

~340° omnidirectional decorative beam.
Assembly with ZORYA adapter.

SPECIFICATION:

Dimensions	Ø 56.0 mm
Height	27.3 mm
Fastening	socket
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish	Length
ZORYA-SC	Single lens	Silicone	clear		56.0
ZORYA-SC-ADAPTER-B	Holder	PC	clear		49.1

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
FP15073_ZORYA-SC-B	Single lens	140	35	35	3.1
» Box size: 398 x 298 x 140 mm					

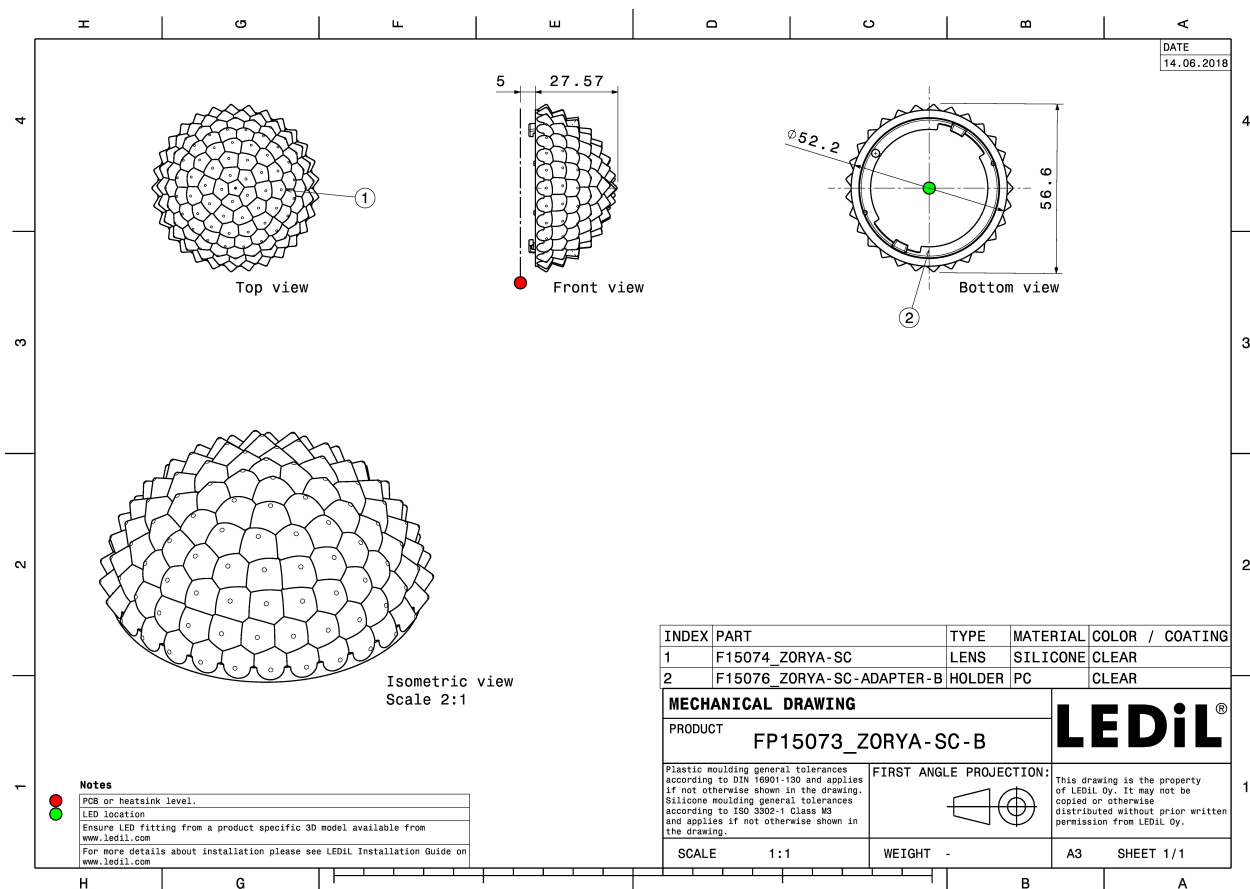


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):




LED V8 Gen6
FWHM / FWTM 234.0° / 310.0°
Efficiency 94 %
Peak intensity 0.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15253_HEKLA-SOCKET-A

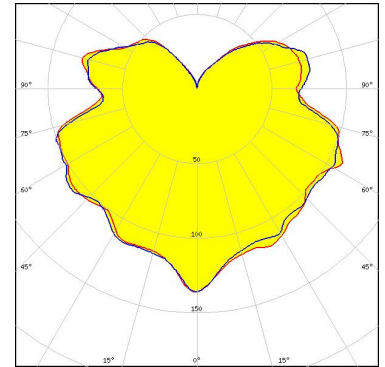

Light distribution files

CITIZEN


LED CLL03x/CLU03x
FWHM / FWTM 171.0° / 317.0°
Efficiency 94 %
Peak intensity 0.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15859_HEKLA-SOCKET-I

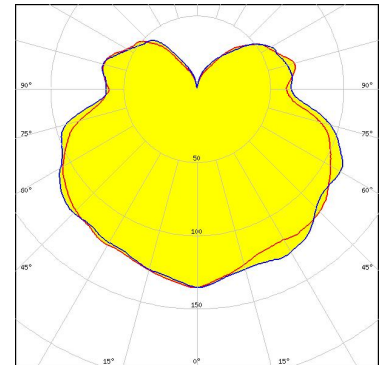

Light distribution files

CITIZEN

LED CLU700/701/702/703
FWHM / FWTM 230.0° / 313.0°
Efficiency 94 %
Peak intensity 0.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15255_HEKLA-SOCKET-C


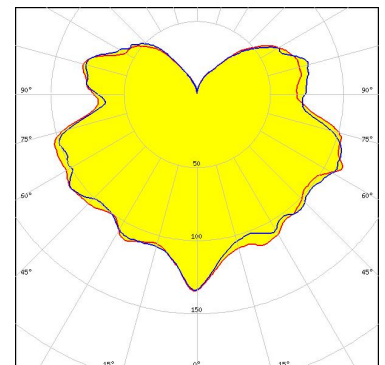


Light distribution files

OPTICAL RESULTS (MEASURED):




LED LUXEON CoB 1211
FWHM / FWTM 160.0° / 300.0°
Efficiency 94 %
Peak intensity 0.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
A.A.G. STUCCHI: 8102-G2

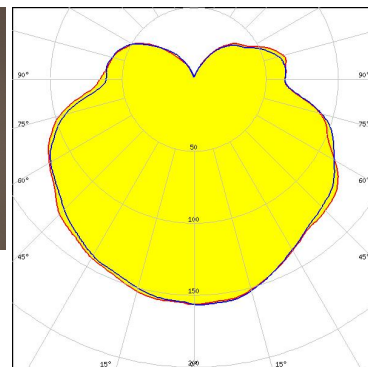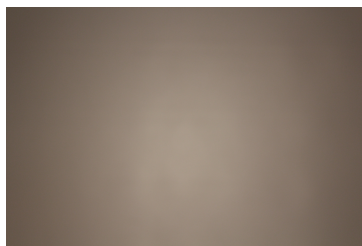

Light distribution files



LED LC020C G2
FWHM / FWTM 214.0° / 237.0°
Efficiency 81 %
Peak intensity 0.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15859_HEKLA-SOCKET-I

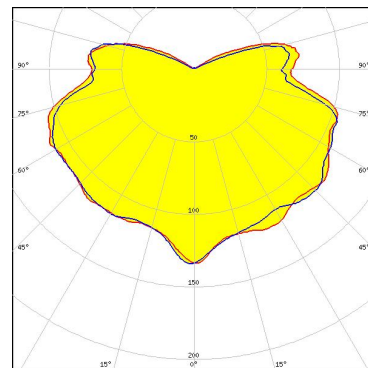


Light distribution files

OPTICAL RESULTS (SIMULATED):



LED BXRA ES Rectangle
 FWHM / FWTM 256.0° / 326.0°
 Efficiency %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

BJB: 47.319.2040

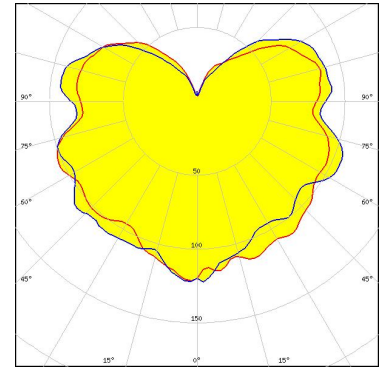


Light distribution files



LED VERO18
 FWHM / FWTM 215.0° / 296.0°
 Efficiency 88 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

C18264_HEKLA-SOCKET-VERO18

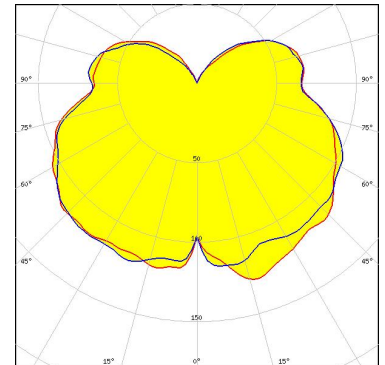


Light distribution files

CITIZEN

LED CLL03x/CLU03x
 FWHM / FWTM 253.0° / 344.0°
 Efficiency 97 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

BJB: 47.319.2021

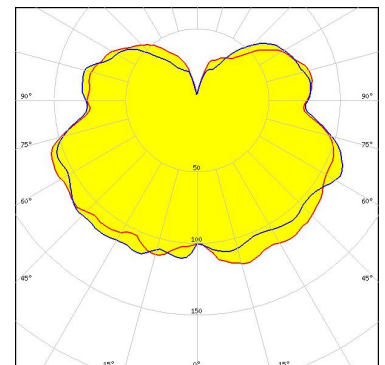


Light distribution files

OPTICAL RESULTS (SIMULATED):

CITIZEN

LED CLL04x/CLU04x
FWHM / FWTM 165.0° / 341.0°
Efficiency 97 %
Peak intensity 0.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

BJB: 47.319.2030

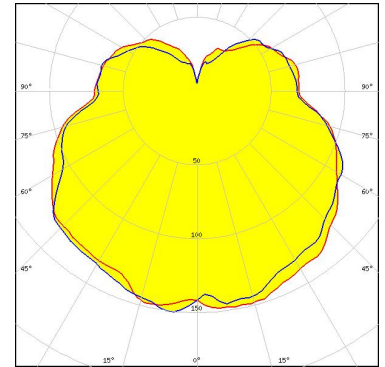


Light distribution files

CITIZEN

LED CLU710/711
FWHM / FWTM 268.0° / 25.0°
Efficiency 98 %
Peak intensity 0.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

BJB: 47.319.2021

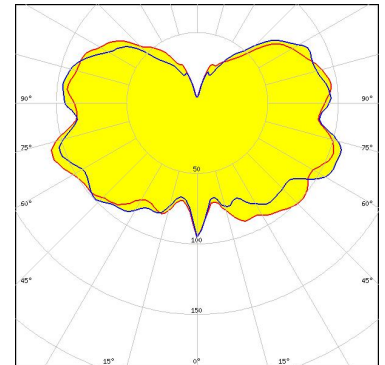


Light distribution files

CITIZEN

LED CLU720/721/723
FWHM / FWTM 265.0° / 28.0°
Efficiency %
Peak intensity 0.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

BJB: 47.319.2021

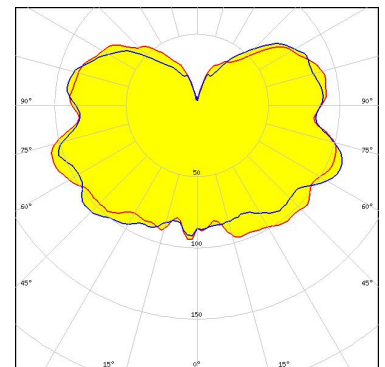


Light distribution files

OPTICAL RESULTS (SIMULATED):

CITIZEN

LED CLU730/731/733
 FWHM / FWTM 264.0° / 344.0°
 Efficiency %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

BJB: 47.319.2030

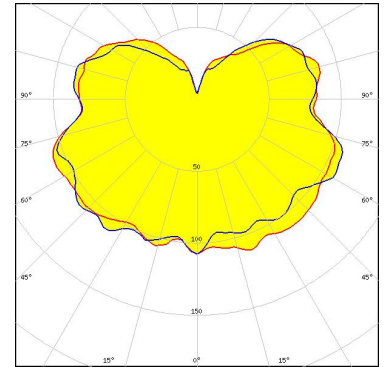


Light distribution files



LED CMT19xx
 FWHM / FWTM 273.0° / 352.0°
 Efficiency 97 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Bender Wirth: 477 Typ L7

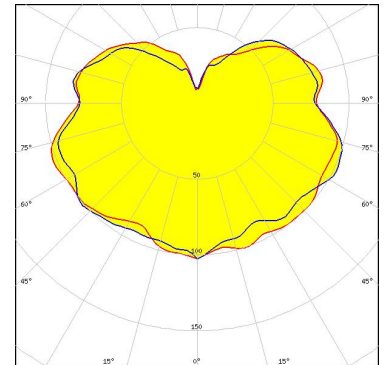


Light distribution files



LED CXA/B 1816 & CXA/B 1820 & CXA 1850
 FWHM / FWTM 266.0° / 338.0°
 Efficiency 95 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

BJB: 47.319.2131

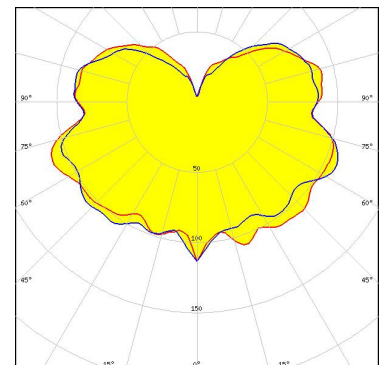


Light distribution files

OPTICAL RESULTS (SIMULATED):



LED CXA/B 25xx
FWHM / FWTM 240.0° / 343.0°
Efficiency 97 %
Peak intensity 0.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

BJB: 47.319.2040

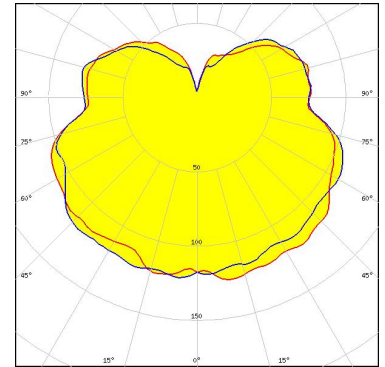


Light distribution files



LED CXA/B 30xx
FWHM / FWTM 242.0° / 343.0°
Efficiency 97 %
Peak intensity 0.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

BJB: 47.319.2151

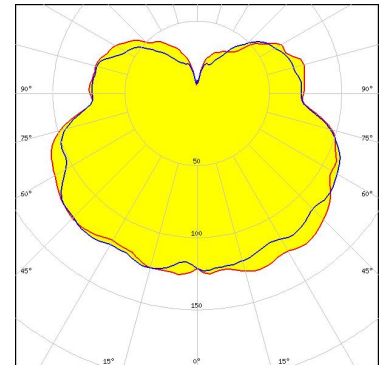


Light distribution files



LED LUXEON CoB 1204/1205
FWHM / FWTM 263.0° / 340.0°
Efficiency 97 %
Peak intensity 0.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

BJB: 47.319.2011

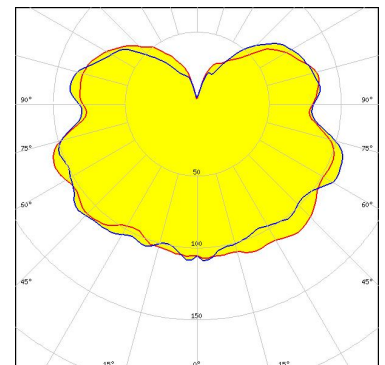


Light distribution files

OPTICAL RESULTS (SIMULATED):



LED LUXEON CoB 1208
 FWHM / FWTM 253.0° / 329.0°
 Efficiency 94 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

BJB: 47.319.2011

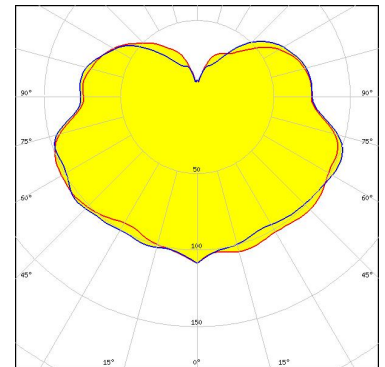


Light distribution files



LED LUXEON CoB 1213/1216/1812
 FWHM / FWTM 157.0° / 303.0°
 Efficiency 93 %
 Peak intensity 0.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

A.A.G. STUCCHI: 8102-G2

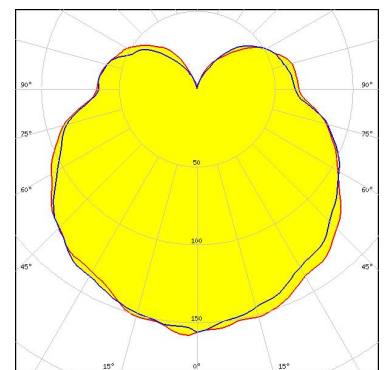


Light distribution files



LED COB L-Type (LES 9)
 FWHM / FWTM 264.0° / 328.0 + 324.0°
 Efficiency 90 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Bender Wirth: 638a Bayonet50

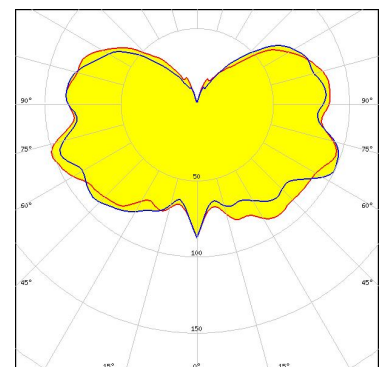


Light distribution files

OPTICAL RESULTS (SIMULATED):



LED COB S-Type (LES 7)
 FWHM / FWTM 263.0° / 327.0°
 Efficiency 91 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Bender Wirth: 652a Bayonet50

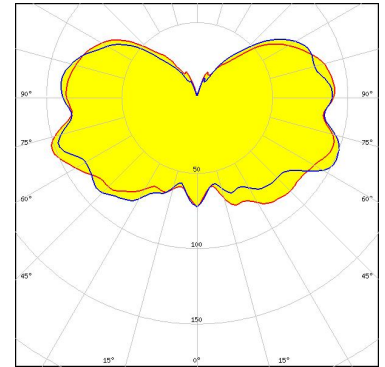


Light distribution files



LED NF2x757G
 FWHM / FWTM 264.0° / 326.0°
 Efficiency 91 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 9
 Light colour/type White
 Required components:

BJB: 47.319.2021

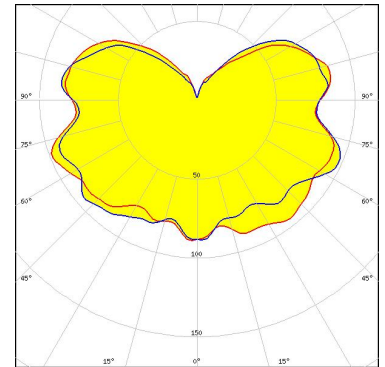


Light distribution files



LED NF2x757G
 FWHM / FWTM 262.0° / 322.0°
 Efficiency 91 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 4
 Light colour/type White
 Required components:

BJB: 47.319.2021

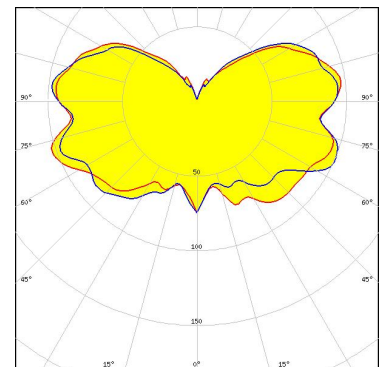


Light distribution files

OPTICAL RESULTS (SIMULATED):



LED Soleriq S19
 FWHM / FWTM 246.0° / 341.0°
 Efficiency 97 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

BJB: 47.319.2170

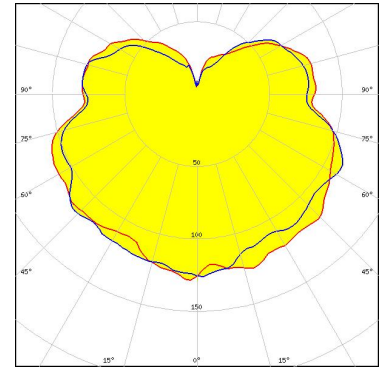


Light distribution files



LED ZC12/18
 FWHM / FWTM 265.0° / 138.0°
 Efficiency 97 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

BJB: 47.319.2021

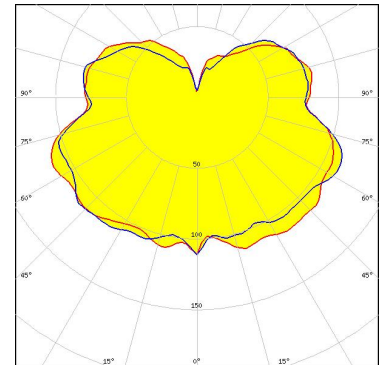


Light distribution files



LED ZC25/40/60
 FWHM / FWTM 166.0° / 342.0°
 Efficiency 97 %
 Peak intensity 0.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

BJB: 47.319.2030

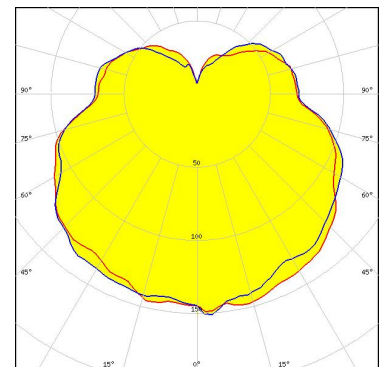


Light distribution files

OPTICAL RESULTS (SIMULATED):

SHARP

LED Mega Zenigata (GW5DGC)
 FWHM / FWTM 257.0° / 78.0°
 Efficiency 96 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

BJB: 47.319.2011

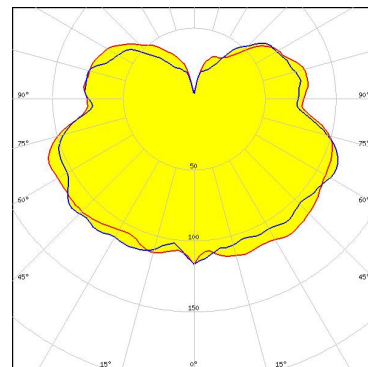


Light distribution files

SHARP

LED Mega Zenigata (GW6DME)
 FWHM / FWTM 250.0° / 340.0°
 Efficiency 96 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


BJB: 47.319.2011

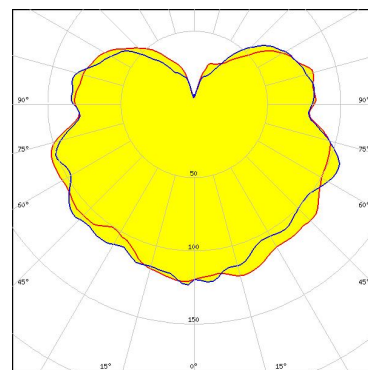

Light distribution files

TRIDONIC

LED SLE G7 LES17 H
 FWHM / FWTM 213.0° / 293.0°
 Efficiency 92 %
 Peak intensity 0.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

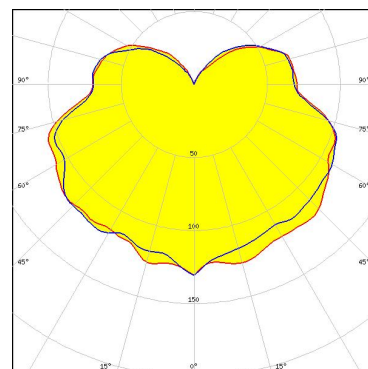


Light distribution files

OPTICAL RESULTS (SIMULATED):

TRIDONIC

LED	SLE G7 LES21 H
FWHM / FWTM	169.0° / 291.0°
Efficiency	91 %
Peak intensity	0.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

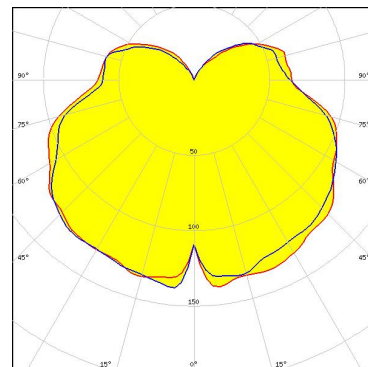

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)