

**Harvatek Surface Mount CHIP LEDs Data Sheet**  
**B36J3RGB-F6C0001H4U1930**

Official Product	HT Part No. B36J3RGB-F6C0001H4U1930			
Tentative Product	*****	*****		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	V1.0	Page 1/16

<b>DISCLAIMER</b> .....	3
<b>LIFE SUPPORT POLICY</b> .....	3
<b>PRODUCT SPECIFICATIONS</b> .....	4
<b>ATTENTION: ELECTROSTATIC DISCHARGE (ESD) PROTECTION</b> .....	4
<b>LABEL SPECIFICATIONS</b> .....	5
<b>SPECIFICATIONS RANGE</b> .....	6
<b>ELECTRO-OPTICAL CHARACTERISTICS</b> .....	7
<b>PACKAGE OUTLINE DIMENSION AND RECOMMENDED SOLDERING PATTERN FOR REFLOW</b>	
<b>SOLDERING</b> .....	7
<b>ABSOLUTE MAXIMUM RATINGS</b> .....	8
<b>CHARACTERISTICS OF B36J3RGB</b> .....	9
<b>PRECAUTION FOR USE</b> .....	10
<b>PACKAGING</b> .....	11
<b>TAPE DIMENSION</b> .....	11
<b>REEL DIMENSION</b> .....	12
<b>PACKING</b> .....	12
<b>DRY PACK</b> .....	13
<b>BAKING</b> .....	13
<b>PRECAUTIONS</b> .....	13
<b>HANDLING OF SILICONE RESIN LEDS</b> .....	14
<b>REFLOW SOLDERING</b> .....	15
<b>REWORKING</b> .....	15
<b>CLEANING</b> .....	15
<b>CAUTIONS OF PICK AND PLACE</b> .....	16
<b>REVISE HISTORY</b> .....	16

Official Product	HT Part No. B36J3RGB-F6C0001H4U1930			
Tentative Product	*****	*****		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	V1.0	Page 2/16

**DISCLAIMER**

HARVATEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. HARVATEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

**Life Support Policy**

HARVATEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of HARVATEK or HARVATEK INTERNATIONAL. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Official Product	HT Part No. B36J3RGB-F6C0001H4U1930			
Tentative Product	*****	*****		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	V1.0	Page 3/16

## Product Specifications

Item	Specification	Material	Quantity
Luminous Intensity(Iv)	Red : 32 mcd typical Green : 46 mcd typical Blue : 8 mcd typical R@5mA;G/B@2mA/ Ts= 25° C; Tolerance ±10%		
Dominant Wavelength	Red : 621 nm typical Green : 530 nm typical Blue : 470 nm typical R@5mA;G/B@2mA/ Ts= 25° C; Tolerance ± 0.5nm		
Forward Voltage	Red : 2.4 V maximum Green : 3.1 V maximum Blue : 3.1 V maximum R@5mA;G/B@2mA/ Ts= 25° C; Tolerance ± 0.05V		
I <sub>r</sub>	< =1 μA @ V <sub>R</sub> = 5 V		
Resin	Dark	Epoxy	
Carrier tape	EIA 481-1A specs	Conductive black tape	4000pcs/reel
Reel	EIA 481-1A specs	Conductive black	
Label	HT standard	Paper	
Packing bag	250x230mm	Aluminum laminated bag/ no-zipper	One reel per bag
Carton	HT standard	Paper	Non-specified

Others:

Each immediate box consists of 5 reels. The 5 reels may not necessarily have the same lot number or the same bin combinations of I<sub>v</sub>, λ<sub>d</sub> and V<sub>f</sub>. Each reel has a label identifying its specification; the immediate box consists of a product label.

※Remarks: This product should be operated in forward bias. If a reverse voltage is continuously applied to the product, such operation can cause migration resulting in LED damage.

### ATTENTION: Electrostatic Discharge (ESD) protection



The symbol to the left denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlGaInP, GaN, or/and InGaN based chips are **STATIC SENSITIVE devices**. ESD precaution must be taken during design and assembly.

If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.

Official Product	HT Part No. B36J3RGB-F6C0001H4U1930		
Tentative Product	*****	*****	
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	Page 4/16

## Label Specifications



### Harvatek P/N:

**B      36J      3      RGB-      F6C      0001      HO**

Product	Package size	Dice Q'ty	Color	Current	Series Number	Taping
PCB	0.65(L) x 0.65(W) x 0.5(H) mm	3 : Tri.	RGB(Full color)	R:5mA G:2mA B:2mA	X001~XZZZ	1.Taping style 2. Q'ty

### Lot No.:

1	2	3	4	5	6	7	8	9	10
E	1	A	1	A	2	2	L	1	2
Code 1 2		Code 3	Code 4	Code 5	Code 6	Code 7	Code 8	Code 9	Code 10
		Mfg. Year	Mfg. Month	Mfg. Date	Consecutive number		Special code		
Internal Tracing Code		2020-L		1:A	01~ZZ		000~ZZZ		
		2021-M		2:B					
		2022-P	1:Jan.	3:C					
		2023-Q	2:Feb.	...					
		...	...	26:Z					
		2026-T	A:Oct.	27:7					
		2027-V	B:Nov.	28:8					
		...	C:Dec.	29:9					
		2030-Y		30:3					
		2031-Z		31:4					
		...							

Official Product	HT Part No. B36J3RGB-F6C0001H4U1930			
Tentative Product	*****	*****		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	V1.0	Page 5/16

## Specifications Range

■ Luminous Intensity (Iv) Bin:

Luminous Intensity (Iv) Bin: R@5mA;G/B @2mA

B36J3RGB Series								
IV								
Red			Green			Blue		
HF3	21.3	26.7	HG3	30	37.5	HB3	5.4	6.8
HG1	24	30	HH1	33.5	42	HC1	6	7.5
HG2	26.7	33.5	HH2	37.5	47	HC2	6.8	8.5
HG3	30	37.5	HH3	42	52.5	HC3	7.5	9.4
HH1	33.5	42	HJ1	47	60	HD1	8.5	10.7
HH2	37.5	47	HJ2	52.5	65.7	HD2	9.4	12
HH3	42	52.5	HJ3	60	75	HD3	10.7	13.4

Note: It maintains a tolerance of  $\pm 10\%$  on Luminous Intensity

Dominant Wavelength ( $\lambda_D$ ) Bin: R@5mA;G/B @2mA

B36J3RGB Series								
WD								
Red			Green			Blue		
RH2	618	623	GH1	526	530	BH1	464	468
RH3	623	628	GH2	528	532	BH2	466	470
RH4	628	633	GH3	530	534	BH3	468	472
			GH4	532	536	BH4	470	474
			GH5	534	538			

Note: It maintains a tolerance of  $\pm 0.5\text{nm}$  on Color Bin

Forward Voltage (Vf) Bin: R@5mA;G/B @2mA

B36J3RGB Series								
Vf								
Red			Green			Blue		
E18	1.6	2.4	F2a	2.1	3.1	F2a	2.1	3.1

Note: It maintains a tolerance of  $\pm 0.05\text{V}$  on forward voltage measurements

Official Product	HT Part No. B36J3RGB-F6C0001H4U1930				
Tentative Product	*****		*****		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.			16/10/2023	V1.0	Page 6/16

Official Product	HT Part No. B36J3RGB-F6C0001H4U1930		
Tentative Product	*****	*****	
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	V1.0 Page 7/16

## Absolute Maximum Ratings

(T<sub>s</sub> 25 °C)

Series (系列)	P <sub>D</sub> (mW) (消耗功率)	I <sub>F</sub> (mA) (順向電流)	IFP (mA) (脈衝順向電流)	VR (反向電壓)	T <sub>OP</sub> (°C) (操作溫度)	T <sub>ST</sub> (°C) (儲存溫度)
Color	Power Dissipation	Forward Current	Pulse Forward Current	Reverse Voltage	Operation Temperature	Storage Temperature
Red/	24.4	5	20	5	-30~+80	-40~+85
Green		2				
Blue		2				


\*\* Condition for I<sub>FP</sub> is pulse of 1/10 duty and 0.1msec width

Remarks: This product should be operated in forward bias. If a reverse voltage is continuously applied to the product, such operation can cause migration resulting in LED damage.


Official Product	HT Part No. B36J3RGB-F6C0001H4U1930				
Tentative Product	*****	*****			
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.			16/10/2023	V1.0	Page 8/16

## Characteristics of B36J3RGB


Relative Intensity vs. Forward Current

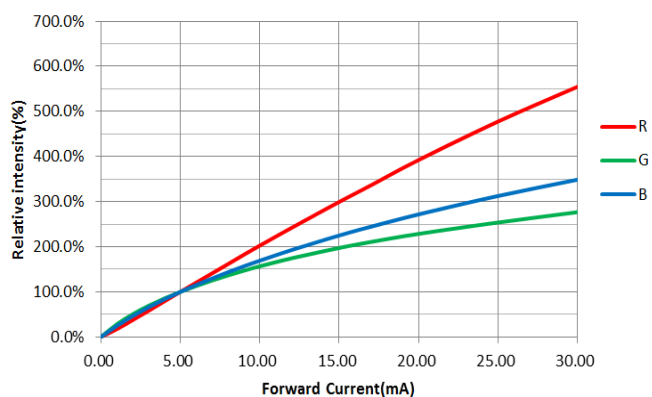




Forward Voltage vs. Forward Current

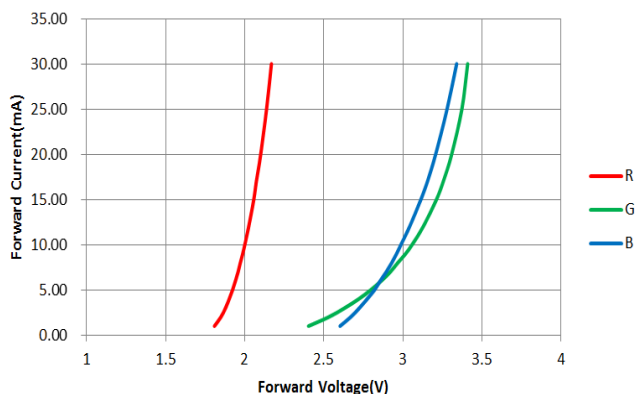

Forward Current vs. Ambient Temperature

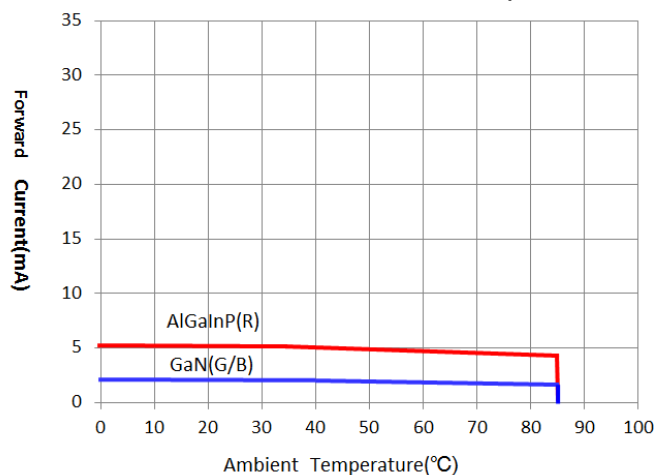

Wavelength vs. Forward Current

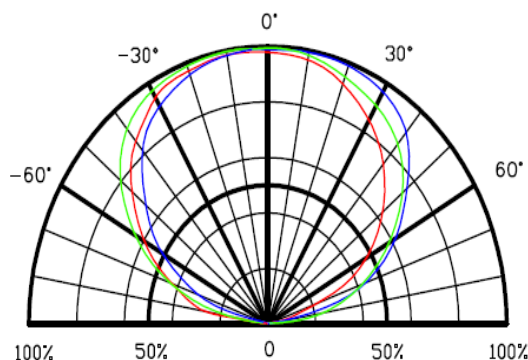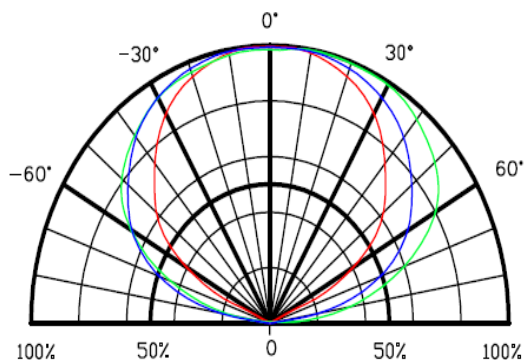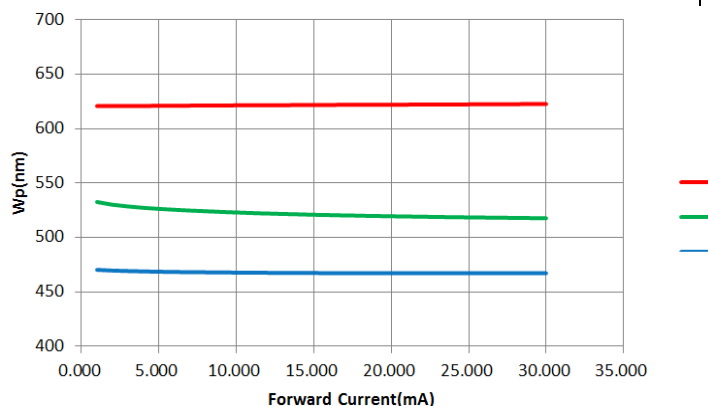


Official Product	HT Part No. B36J3RGB-F6C0001H4U1930		
Tentative Product	*****	*****	*****
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	Page 9/16

**Precaution for Use**

1. The chips should not be used directly in any type of fluid such as water, oil, organic solvent, etc.
2. When the LEDs are illuminating, the maximum ambient temperature should be first considered before operation.
3. LEDs must be stored in a clean environment. A sealed container with a nitrogen atmosphere is necessary if the storage period is over 3 months after shipping.
4. The LEDs must be used within 4 weeks after unpacked. Unused products must be repacked in an anti-electrostatic package, folded to close any opening and then stored in a dry and cool space.
5. The appearance and specifications of the products may be modified for improvement without further notice.
6. The LEDs are sensitive to the static electricity and surge. It is strongly recommended to use a grounded wrist band and anti-electrostatic glove when handling the LEDs. If a voltage over the absolute maximum rating is applied to LEDs, it will damage LEDs. Damaged LEDs will show some abnormal characteristics such as remarkable increase of leak current, lower turn-on voltage and getting unlit at low current.


Official Product	HT Part No. B36J3RGB-F6C0001H4U1930			
Tentative Product	*****	*****		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	V1.0	Page 10/16

## Packaging Tape Dimension

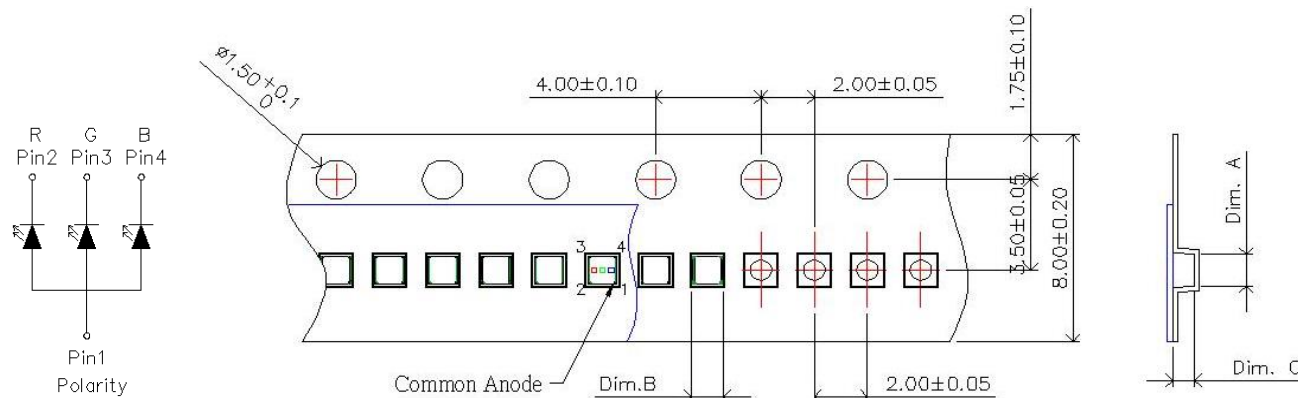


Dim. A	Dim. B	Dim. C	Q'ty/Reel
0.72±0.03	0.72±0.03	0.56±0.03	4K

Unit: mm

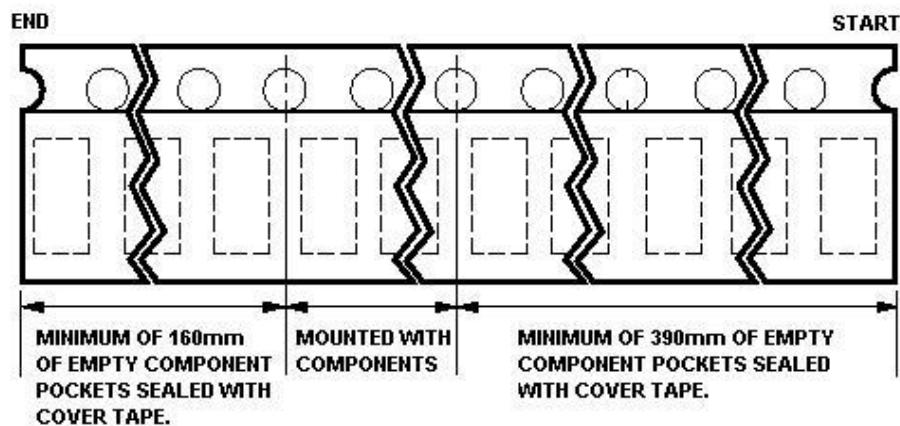


Official Product	HT Part No. B36J3RGB-F6C0001H4U1930		
Tentative Product	*****	*****	*****
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	Page 11/16

## Reel Dimension

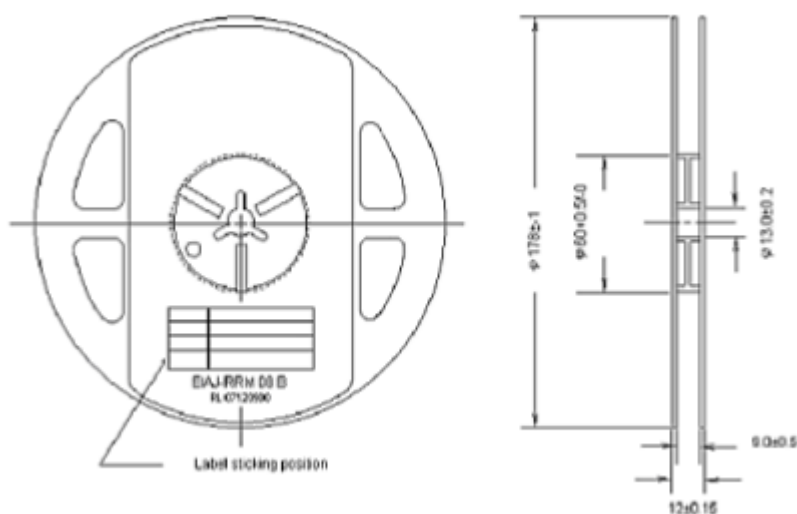

## Packing

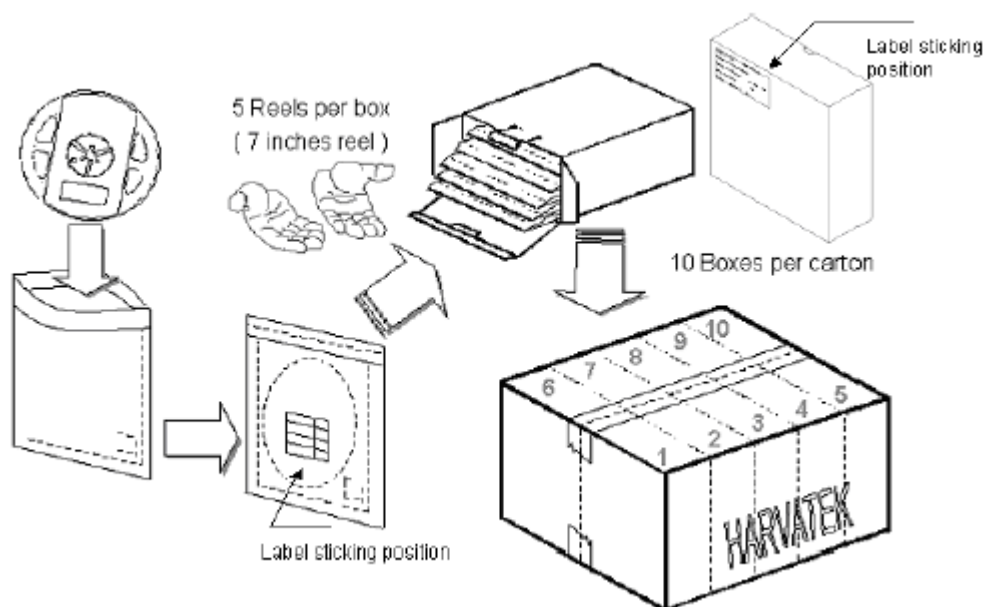

5 boxes per carton is available depending on shipment quantity.


Official Product	HT Part No. B36J3RGB-F6C0001H4U1930		
Tentative Product	*****	*****	*****
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	Page 12/16

## Dry Pack

All SMD optical devices are **MOISTURE SENSITIVE**. Avoid exposure to moisture at all times during transportation or storage. Every reel is packaged in a moisture protected anti-static bag. Each bag is properly sealed prior to shipment.

A humidity indicator will be included in the moisture protected anti-static bag prior to shipment.

The packaging sequence is as follows:

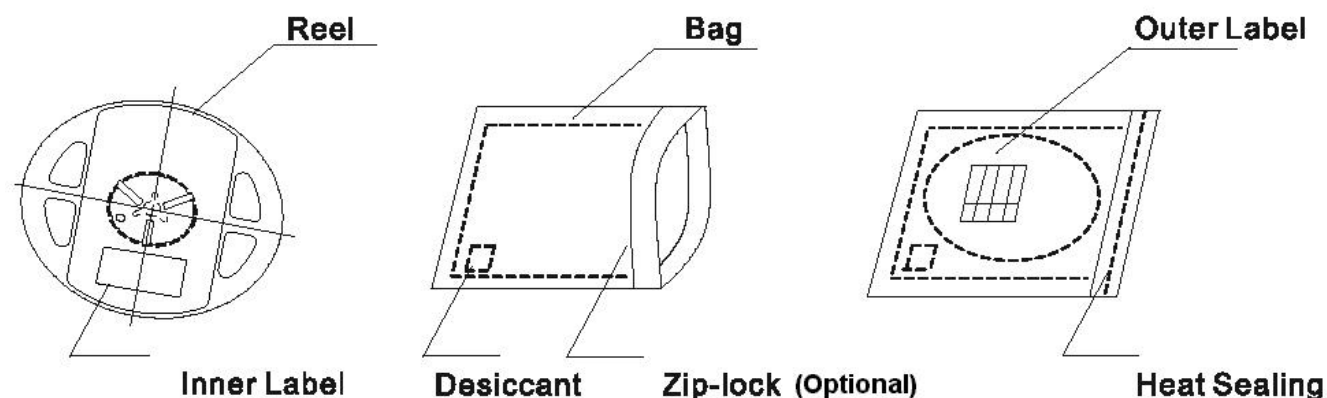

## Baking

Baking before soldering is recommended when the package has been unsealed for 4weeks.

The conditions are as followings:

1. MBB open $\leq$ 672hrs,  $50\pm3^{\circ}\text{C}\times(3\text{hrs})$ .
2. MBB open $>$ 672hrs,  $50\pm3^{\circ}\text{C}\times(8\sim12\text{hrs})$  and  $<5\%\text{RH}$ , taped reel type.
3.  $100\pm3^{\circ}\text{C}\times(45\text{min}\sim1\text{hr})$ , bulk type.
4.  $130\pm3^{\circ}\text{C}\times(15\text{min}\sim30\text{min})$ , bulk type.

## Precautions

1. Avoid exposure to moisture at all times during transportation or storage.
2. Anti-Static precaution must be taken when handling GaN, InGaN, and AlGaInP products.
3. It is suggested to connect the unit with a current limiting resistor of the proper size. Avoid applying a reverse voltage beyond the specified limit.
4. Avoid operation beyond the limits as specified by the absolute maximum ratings.
5. Avoid direct contact with the surface through which the LED emits light.
6. If possible, assemble the unit in a clean room or dust-free environment.

Official Product	HT Part No. B36J3RGB-F6C0001H4U1930		
Tentative Product	*****	*****	
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	<div>V1.0</div> <div>Page 13/16</div>

## Handling of Silicone Resin LEDs

### Handling Indications

During processing, mechanical stress on the surface should be minimized as much as possible.

Sharp objects of all types should not be used to pierce the sealing compound.



Figure 1

In general, LEDs should only be handled from the side. By the way, this also applies to LEDs without a silicone sealant, since the surface can also become scratched.

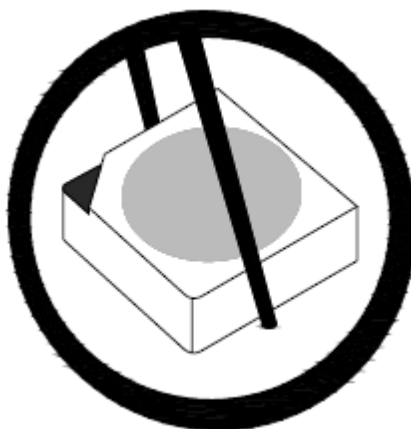


Figure 2

When populating boards in SMT production, there are basically no restrictions regarding the form of the pick and place nozzle, except that mechanical pressure on the surface of the resin must be prevented.

This is assured by choosing a pick and place nozzle which is large than LEDs reflector area.


Official Product	HT Part No. B36J3RGB-F6C0001H4U1930			
Tentative Product	*****	*****		
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	V1.0	Page 14/16

## Reflow Soldering

Recommend soldering paste specifications:

1. Operating temp.: Above 217 °C ,60~150 sec.
2. Peak temp.:260 °CMax.,10sec Max.
3. Reflow soldering should not be done more than two times.
4. Never attempt next process until the component is cooled down to room temperature after reflow.
5. The recommended reflow soldering profile (measured on the surface of the LED terminal) is as following:

Lead-free Solder Profile

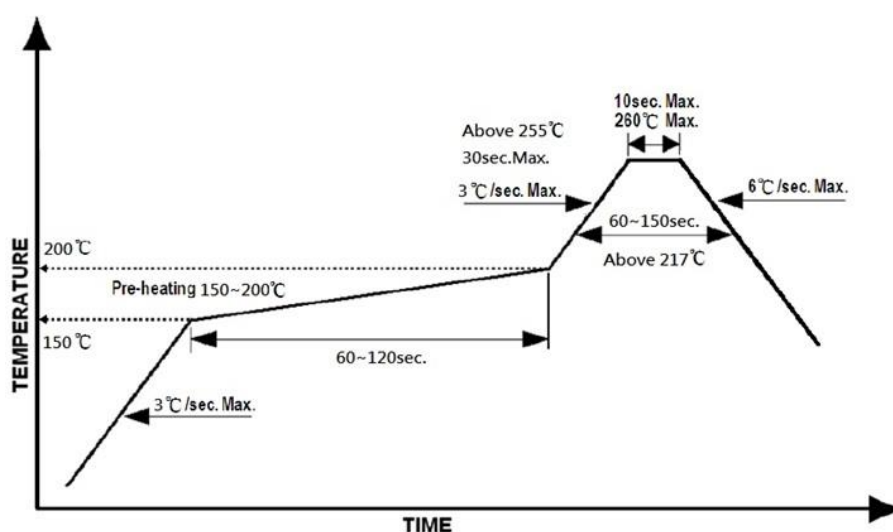

## Reworking

- Rework should be completed within 5 seconds under 260 °C.
- The iron tip must not come in contact with the copper foil.
- Twin-head type is preferred.

## Cleaning

Following are cleaning procedures after soldering:

- An alcohol-based solvent such as isopropyl alcohol (IPA) is recommended.
- Temperature x Time should be 50°C x 30sec. or <30°C x 3min
- Ultrasonic cleaning: < 15W/ bath; bath volume ≤ 1liter
- Curing: 100 °C max, <3min

Official Product	HT Part No. B36J3RGB-F6C0001H4U1930		
Tentative Product	*****	*****	
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	<div>V1.0</div> <div>Page 15/16</div>

## Cautions of Pick and Place

- Avoid stress on the resin at elevated temperature.
- Avoid rubbing or scraping the resin by any object.
- Electric-static may cause damage to the component. Please ensure that the equipment is properly grounded. Use of an ionizer fan is recommended.

## Revise History

Rev.	Descriptions	Date	Page
-	-	16/10/2023	-

Official Product	HT Part No. B36J3RGB-F6C0001H4U1930		
Tentative Product	*****	*****	*****
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		16/10/2023	Page 16/16