


# CCT Tunable Dimmer

Intuitive User Interface with Dual Channel 0 – 10V Dimming, Customizable Settings

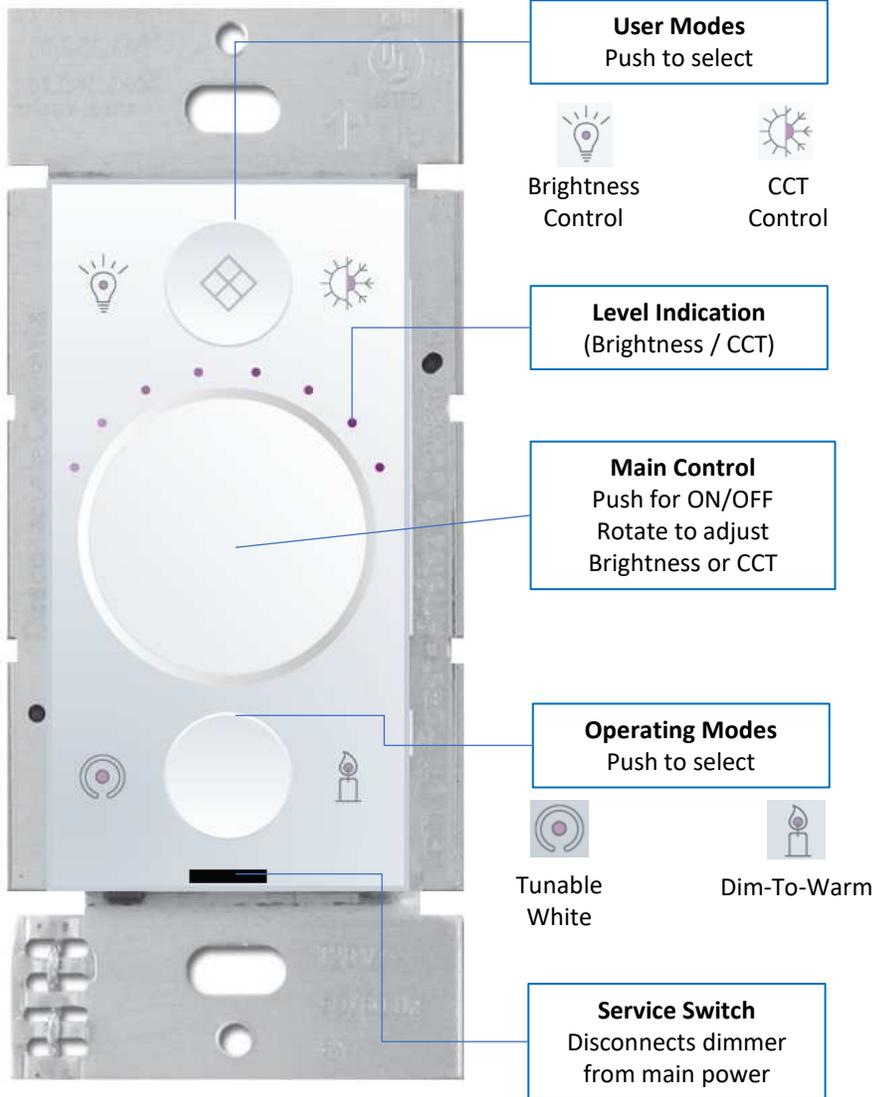

## Product Offering

**Part number: SDW-AOD1K4/2-ZZ-M**

- Universal Input Voltage (100 – 277V)
- User friendly, intuitive rotary dial user interface
- User Modes:
  - Brightness control
  - CCT control
- Operating Modes:
  - CCT Tunable Mode
  - Dim-To-Warm Mode
- Customize:
  - Min and Max Brightness settings
  - Min and Max CCT settings
  - Min and Max Brightness Dim-To-Warm settings
  - On/Off Fade-in/Fade-Out Duration

## Perfect Companion for Cuvee's 2-Channel Driver (DMR series)

**Part number: DMR-AOD038/2-PC1K1-42**



116.9 x 62.5 x 27 mm

### Input Characteristics

Input Voltage Range	100 – 277 VAC
Absolute Input Voltage	90 – 305 VAC
Input Frequency	50/60Hz

### Output Characteristics

Output Current Control	5A
------------------------	----

### Dimming Characteristics

Control Channels	2
Dimming Protocol	0 – 10V

### Warranty

Dimmer Warranty	5 years
Combined Warranty (Purchase Luminus COB + Cuvee CCT Driver/Dimmer, contact Luminus for more information)	5 years

## CCT Tunable Dimmer

Intuitive User Interface with Dual Channel 0 – 10V Dimming, Customizable Settings

