

OSRAM PLPT9 450D_E A01

Datasheet

Discontinued

Published by **ams-OSRAM AG**

Tobelbader Strasse 30, 8141 Premstaetten, Austria

Phone +43 3136 500-0

ams-osram.com

© All rights reserved



Metal Can

PLPT9 450D_E A01

Blue Laser Diode in TO90 Package



Applications

- Static Forward Lighting

Features

- Corrosion Robustness Class: 1B
- Qualifications: Depending on the mode of operation, these devices emit highly concentrated visible light which can be hazardous to the human eye. Products which incorporate these devices have to follow the safety precautions found in IEC 60825 "Safety of laser products".
- Typical emission wavelength: 447 nm
- Efficient radiation source for cw and pulsed operation
- TO90 package
- ESD protection diode
- Laser diode isolated against package

Ordering Information

Type	Peak output power typ. P_{opt}	Ordering Code
PLPT9 450D_E A01	3.5 W	Q65112A4348

Maximum Ratings

Parameter	Symbol		Values
Operating temperature	T_{op}	min.	-40 °C
		max.	120 °C
Storage temperature	T_{stg}	min.	-40 °C
		max.	135 °C
Junction temperature	T_j	max.	160 °C
Peak output power ¹⁾ $T_{case} \leq 60 \text{ °C}$	P_{opt}	max.	3.7 W
Forward current ²⁾ $T_{case} = 25 \text{ °C}$	I_F	max.	2.6 A
Reverse current	I_R	max.	20 mA
Soldering temperature $t_{max} = 10 \text{ sec}$	T_s	max.	260 °C

Operation outside these conditions may damage the device. Operation at the maximum ratings may influence lifetime.

Characteristics

$P_{opt} = 3.5 \text{ W}$; $T_{case} = 25 \text{ °C}$

Parameter	Symbol		Values
Peak wavelength ³⁾	λ_{peak}	min.	440 nm
		typ.	447 nm
		max.	455 nm
Peak output power $I_F = 2.2 \text{ A}$	P_{opt}	typ.	3.5 W
Beam divergence (FWHM) parallel to pn-junction	$\Theta_{ }$	min.	6 °
		typ.	9 °
		max.	13 °
Beam divergence (FWHM) perpendicular to pn-junction	Θ_{\perp}	min.	41 °
		typ.	49 °
		max.	57 °
Threshold current	I_{th}	typ.	0.25 A
		max.	0.40 A
Forward voltage ⁴⁾	V_F	max.	5.5 V
Forward current ²⁾	I_F	typ.	2.2 A
		max.	2.5 A
Total power dissipation	P_{tot}	typ.	6.5 W
TE polarization	P_{TE}	typ.	100:1
Thermal resistance junction case real	R_{thJC}	typ.	9 K / W


Wavelength Groups

$T_{\text{case}} = 25\text{ °C}$

Group	Peak wavelength ⁵⁾ $P_{\text{opt}} = 3.5\text{ W}$ min. λ_{peak}	Peak wavelength ⁵⁾ $P_{\text{opt}} = 3.5\text{ W}$ max. λ_{peak}
1	440 nm	442 nm
2	442 nm	444 nm
3	444 nm	446 nm
4	446 nm	448 nm
5	448 nm	450 nm
6	450 nm	452 nm
7	452 nm	455 nm


Relative Spectral Emission 6), 7)

$$P_{\text{opt}} = f(\lambda)$$

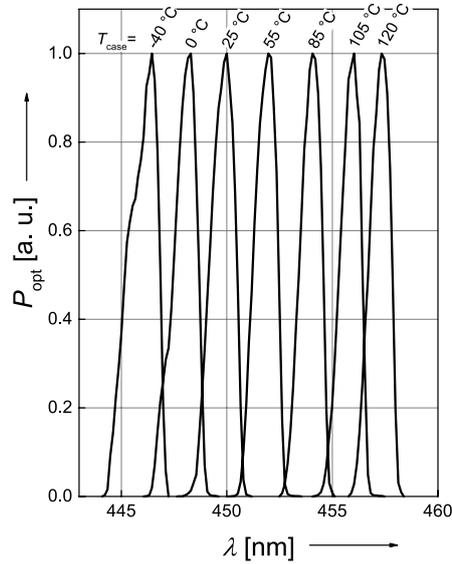


Optical Output Power 6), 7)

$$P_{\text{opt}} = f(I_F)$$

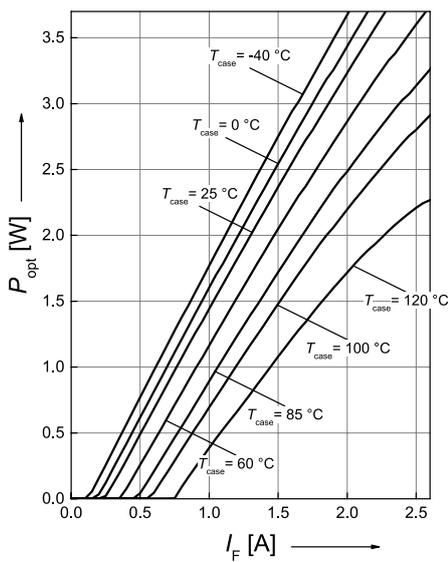

Forward Voltage 6)


$$V_F = f(I_F)$$

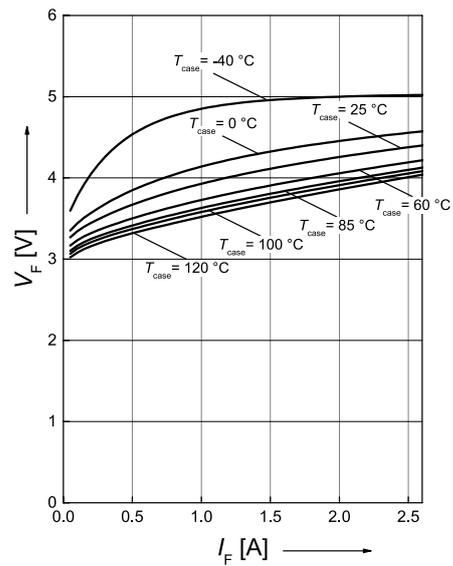

Discontinued


Threshold Current ⁶⁾

$$I_{th} = f(T_A)$$

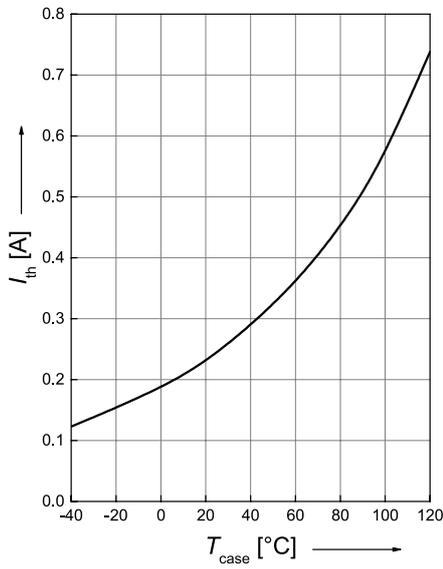


Max. Permissible Opt. Output Power

$$P_{opt} = f(T_A)$$

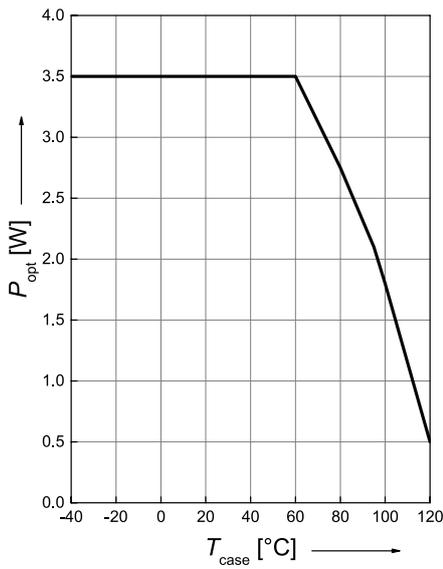

Dimensional Drawing ⁸⁾

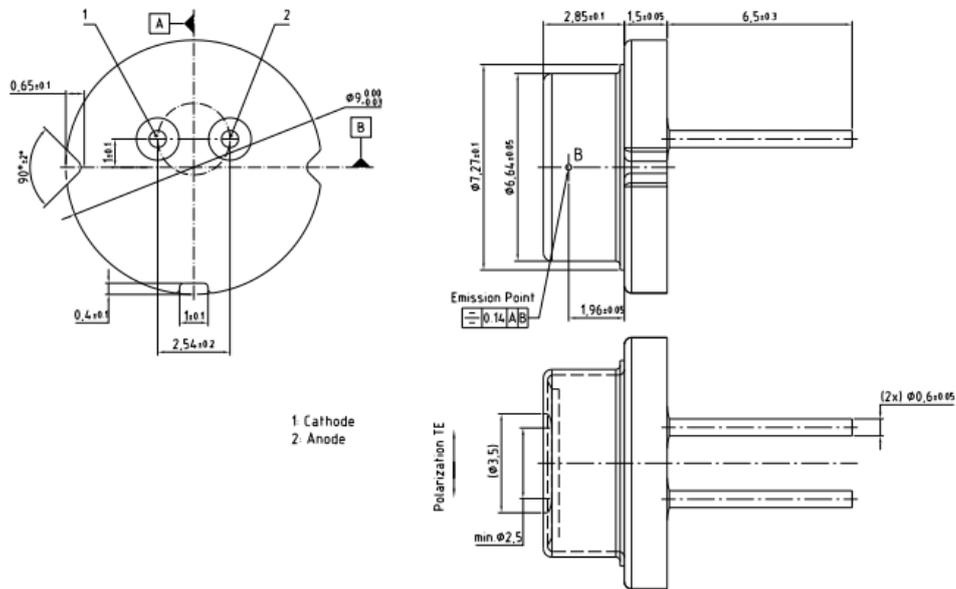


E062 5902 06-03

Further Information:

Approximate Weight: 500.0 mg

Corrosion test: Class: 1B
Test condition: 25°C / 75 % RH / 200ppb SO₂, 200ppb NO₂, 10ppb H₂S,
10ppb Cl₂ / 21 days (EN 60068-2-60 (Method 4))


Electrical Internal Circuit

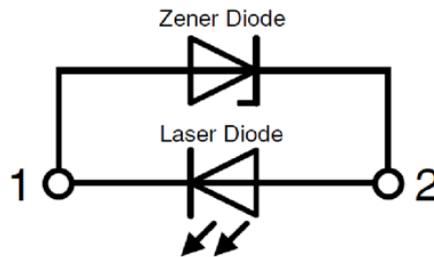


Pin	Description
PIN 1	LD Cathode
PIN 2	LD Anode

TTW Soldering

IEC-61760-1 TTW

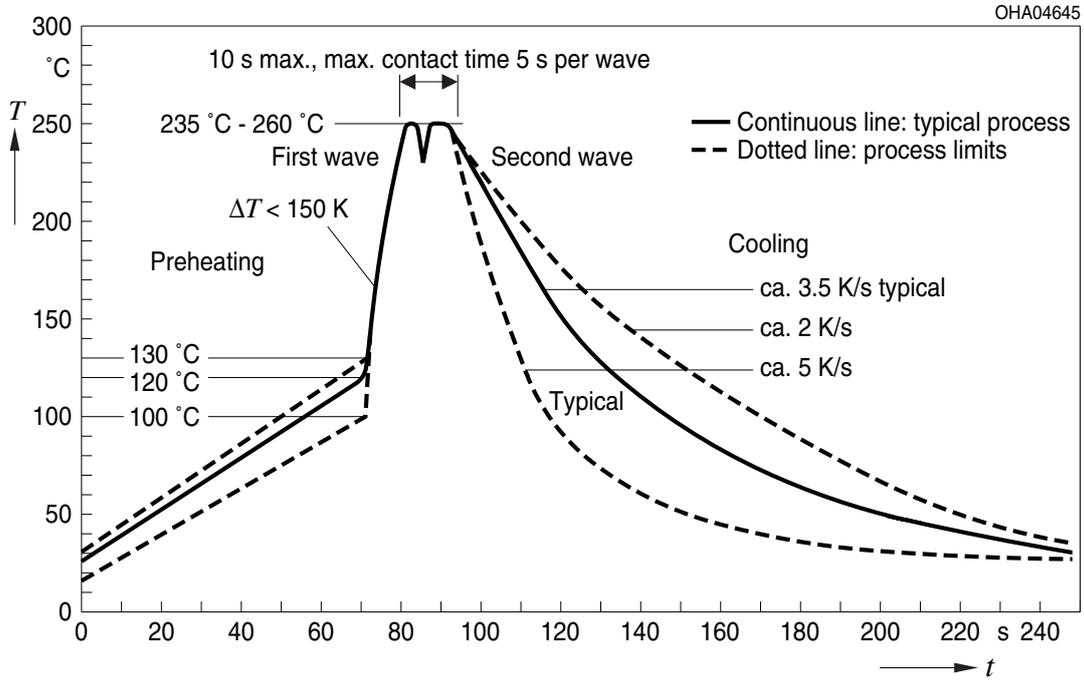


Taping ⁸⁾

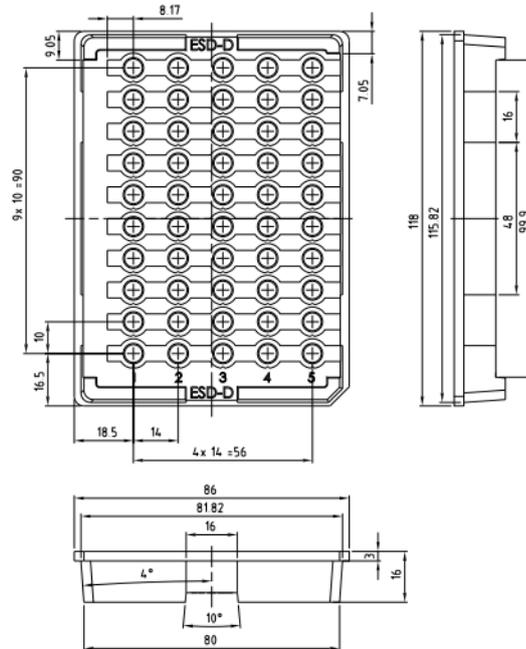

C63092-A4382-X1-01

Discontinued

Tape and Reel ⁹⁾

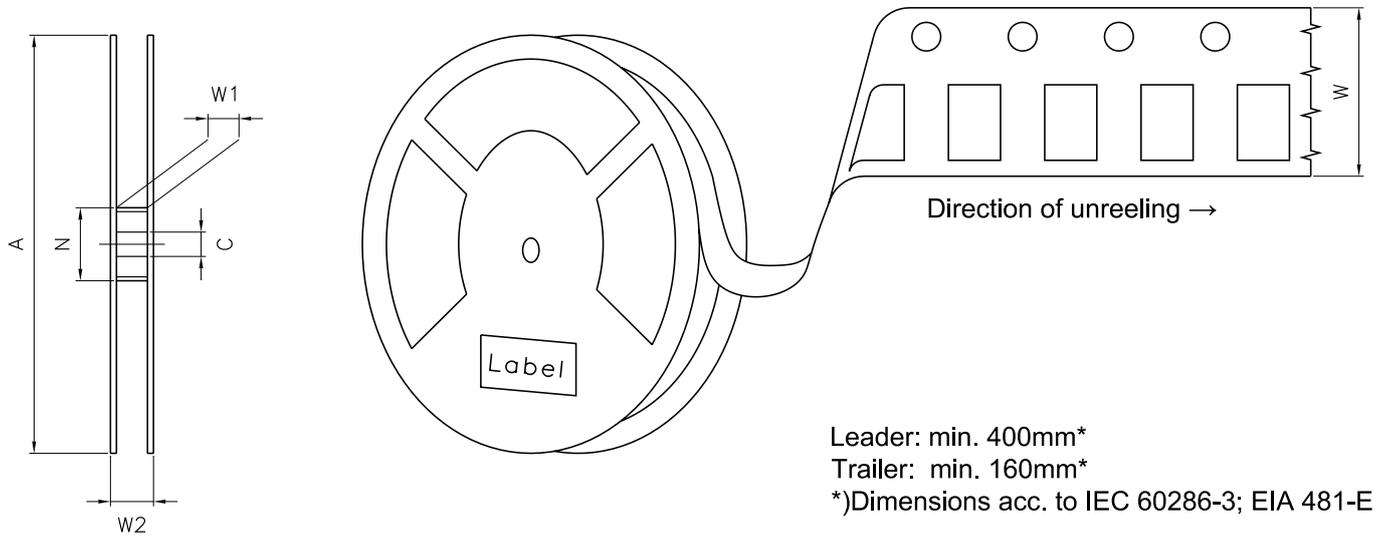

Barcode-Product-Label (BPL)

OSRAM LX XXXX BIN1: XX-XX-X-XXX-X

RoHS Compliant

(6P) BATCH NO: 1234567890

(1T) LOT NO: 1234567890 (9D) D/C: 1234

(X) PROD NO: 123456789 (Q) QTY: 9999 (G) GROUP: XX-XX-X-X


ML Temp ST
X XXX °C X

Pack: RXX
DEMY XXX
X_X123_1234.1234 X

OHA04563

Discontinued

Dry Packing Process and Materials

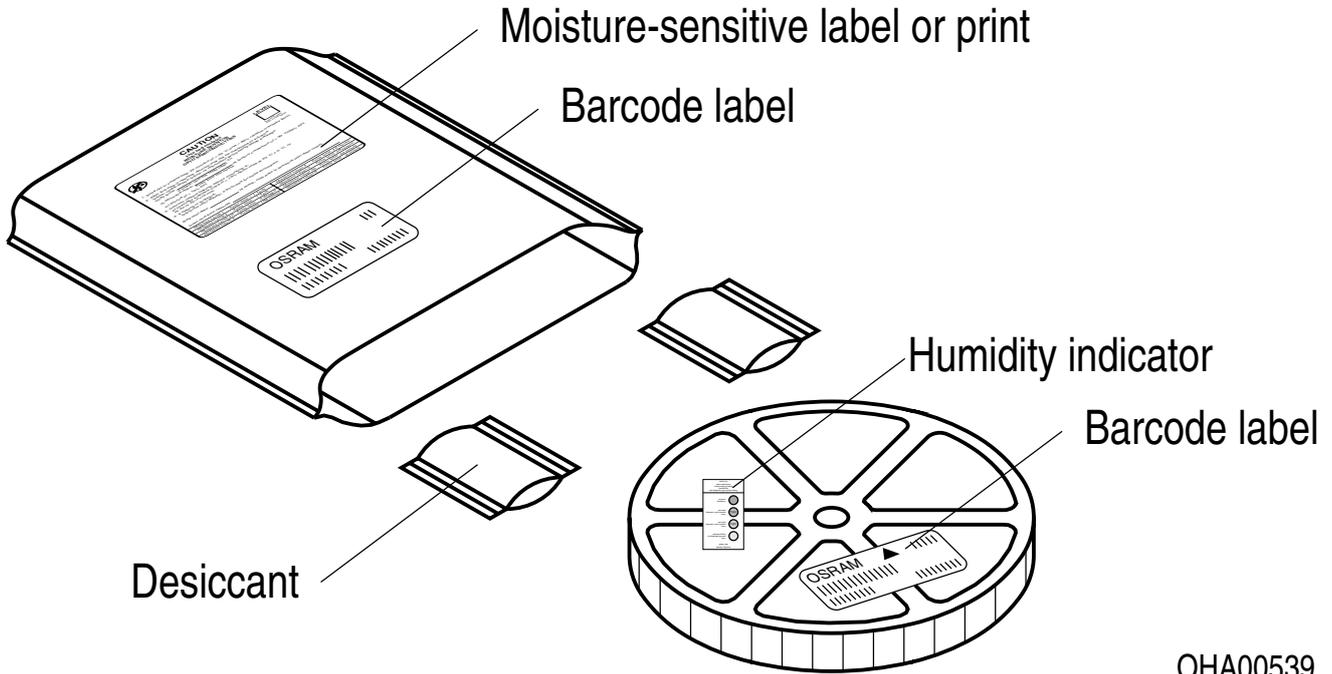

OHA00539

Notes

Depending on the mode of operation, these devices emit highly concentrated visible and non visible light which can be hazardous to the human eye. Products which incorporate these devices have to follow the safety precautions given in IEC 60825-1.

Subcomponents of this device contain, in addition to other substances, metal filled materials including silver. Metal filled materials can be affected by environments that contain traces of aggressive substances. Therefore, we recommend that customers minimize device exposure to aggressive substances during storage, production, and use. Devices that showed visible discoloration when tested using the described tests above did show no performance deviations within failure limits during the stated test duration. Respective failure limits are described in the IEC60810.

Important notes of operation for laser diode

a) Electrical operation

OSRAMs laser diodes are designed for maximum performance and reliability. Operating the laser diode above the maximum rating even for very short periods of time can damage the laser diode or reduce its lifetime. The laser diode must be operated with a suitable power supply with minimized electrical noise. The laser diode is very sensitive to electrostatic discharge (ESD). Proper precautions must be taken.

b) Mounting instructions

In order to maintain the lifetime of the laser diode proper heat management is essential. Due to the design of the laser diode heat is dissipated only through the base plate of the diode's body. A proper heat conducting interconnection between the diodes base plate and the heat sink must be maintained.

For further application related information please visit <https://ams-osram.com/support/application-notes>

Disclaimer

Attention please!

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version on our website.

Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Product and functional safety devices/applications or medical devices/applications

Our components are not developed, constructed or tested for the application as safety relevant component or for the application in medical devices.

Our products are not qualified at module and system level for such application.

In case buyer – or customer supplied by buyer – considers using our components in product safety devices/ applications or medical devices/applications, buyer and/or customer has to inform our local sales partner immediately and we and buyer and /or customer will analyze and coordinate the customer-specific request between us and buyer and/or customer.

Glossary

- 1) **Brightness:** The brightness values are measured with a tolerance of $\pm 11\%$.
- 2) **Operating/Forward current:** IF is measured with an internal reproducibility of $\pm 7\%$ (acc. to GUM with a coverage factor of $k = 3$).
- 3) **Wavelength:** λ_{peak} is measured with an internal reproducibility of ± 0.3 nm (acc. to GUM with a coverage factor of $k = 3$).
- 4) **Forward Voltage:** The forward voltages are measured with a tolerance of ± 0.1 V.
- 5) **Wavelength:** The wavelengths are measured with a tolerance of ± 1 nm.
- 6) **Typical Values:** Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- 7) **Testing temperature:** TA = 25°C (unless otherwise specified)
- 8) **Tolerance of Measure:** Unless otherwise noted in drawing, tolerances are specified with ± 0.1 and dimensions are specified in mm.
- 9) **Tape and Reel:** All dimensions and tolerances are specified acc. IEC 60286-3 and specified in mm.

Revision History

Version	Date	Change
1.2	2018-11-29	Dimensions of Transportation Box Disclaimer Further Information
1.3	2021-04-01	Maximum Ratings
1.4	2023-08-01	New Layout Applications Discontinued

Discontinued



EU RoHS and China RoHS compliant product

此产品符合欧盟 RoHS 指令的要求；
按照中国的相关法规和标准，
不含有毒有害物质或元素。

Published by ams-OSRAM AG

Tobelbader Strasse 30, 8141 Premstaetten, Austria

Phone +43 3136 500-0

ams-osram.com

© All rights reserved

am  **OSRAM**