

# VUE-3215

## 21.5" Touch Monitor

Preliminary



### Features


- 21.5" active screen size
- 6-axis color adjustment (Green/Red/Blue/Cyan/Magenta/Yellow) for high level and more accuracy customized image
- Full-flat cover glass for extremely simple and elegant surface design
- Anti-glare (AG) treatment on screen for comfortable viewing experience
- Front IK08 high-level impact protection
- Adopts industrial-grade components for guaranteed performance
- Support 10-point touch function (PCAP technology)
- Excellent touch noise immunity well-suited for rugged applications (CS 10V)
- Compliant with many touch methods including fingers, glove, and stylus
- Built-in multiple I/O interfaces for diverse media connectivity

### Specifications

<b>Display</b>	Active Screen Size		21.5 inch
	Resolution		1920 x 1080 (FHD)
	Brightness		250nits (LCM panel, typ.)
	Contrast Ratio		3000:1
	Aspect Ratio		16:9 (Wide)
	Viewing Angle		89° / 89° / 89° / 89° (typ.)
	Backlight Life (hours)		40,000 (typ.)
<b>Touch</b>	Touch Type		Projected Capacitive Touch (PCAP)
	Touch Function		10 points
	Touch Interface		USB
	Touch Method		Finger/Glove
	Stylus		Active Pen (optional accessory)
<b>Connectivity</b>	Input	Video	VGA x 1, HDMI x 1, DVI-D x 1, DisplayPort x 1
		Audio	Audio line in x 1
		Control	USB3.0 typeB x 1 (for touch function)
		Others	USB3.0 typeA x 2
	Output	Video	N/A
		Audio	2W+2W Internal Speaker
Control		N/A	
<b>System</b>	OSD Language		English, Spanish, French, Portuguese, Russian, Simplified Chinese, Traditional Chinese, Korean
	OS function		Hot key (ON/OFF, LEFT, RIGHT, MENU, AUTO)
<b>Power</b>	Power Type		External AC to DC power adapter, 20V, 65W
	Power Input-AC		100-240V <sub>AC</sub> , 50-60Hz, 3.25A
	Power Consumption		ON Mode< 65W; Standby Mode< 0.5W; OFF Mode< 0.3W
<b>Environment</b>	Operating	Temperature	0°C ~ 40°C
		Humidity	10% to 85% (non-condensing)
	Storage	Temperature	-20 ~ 60 °C
		Humidity	5% to 80% (non-condensing)
<b>Mechanical Specification</b>	Housing Material		Texture (Black/White)
	Waterproof Rating		N/A
	VESA Compatibility		100 x 100 mm
	Side mount screw hole		N/A
	Hand Hoder/Stand		Yes, with hinge stand
	Cable Management		N/A
	Dimensions (W x H x D)	Physical with stand	522 x 397 x 58 mm
		Packing	609 x 415 x 201 mm
	Weight	Net	6.5 kg
Gross		9 kg	
<b>Installation</b>	Installation rotation		Landscape
	Mounting on a wall		100 x 100 mm, VESA grid
	Mounting with stand/arm		100 x 100 mm, VESA grid
	Mounting through bracket		N/A
	Extending PC/peripherals		N/A
<b>Certificate</b>		IEC/EN 60950+62368, UL62368, CE, FCC, UKCA, CCC, BSMI	
<b>Warranty</b>		2-year (1-year for panel)	

## Dimensions

Unit: mm

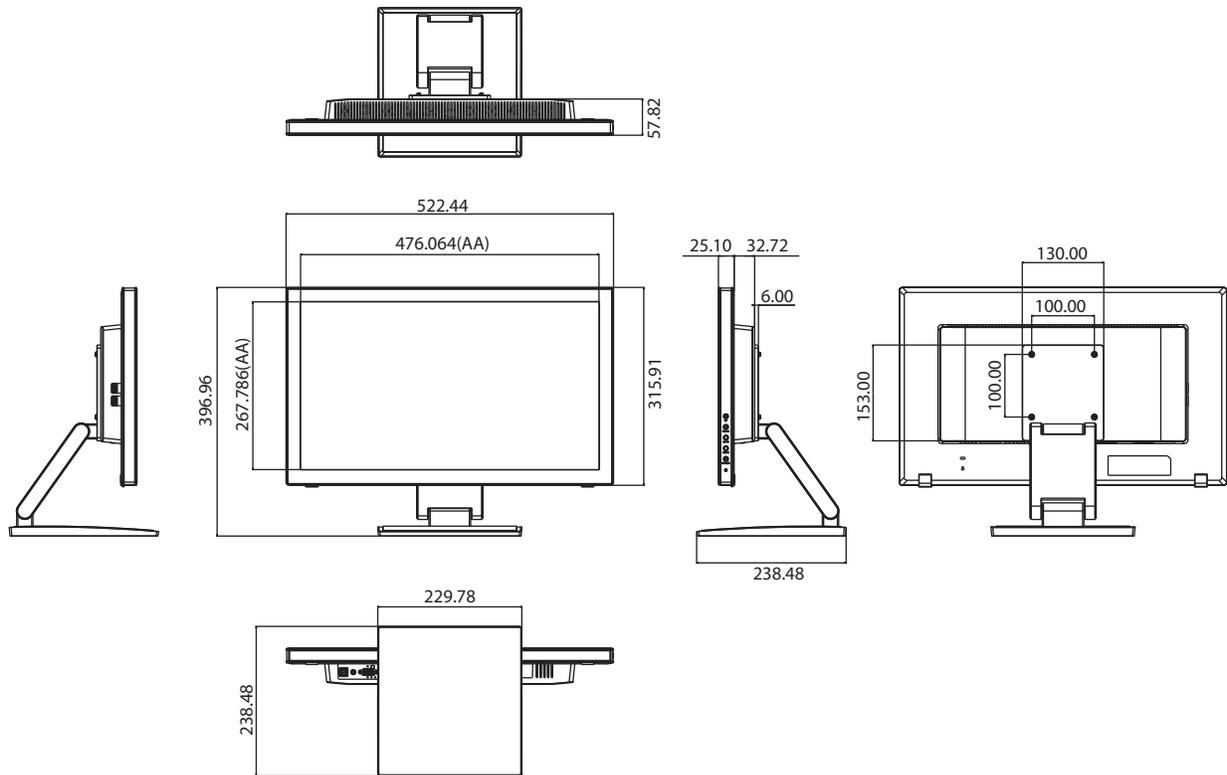

## Ordering Information

Part Number		Description	Packing List
Black housing	White housing		
VUE-3215-FD25PA-N4	VUE-3215-FD25PA-N3	Advantech 21.5" Full HD PCAP Touch Monitor (incl. Japan, Korea, Australia, and Middle East Power Cord)	<ul style="list-style-type: none"> <li>▪ Power Cord (1.5M, Black)</li> <li>▪ Power Adaptor (1.5M, Black)</li> <li>▪ VGA Cable (1.5M, Black)</li> <li>▪ HDMI Cable (1.5M, Black)</li> <li>▪ DisplayPort Cable (1.5M, Black)</li> <li>▪ DVI Cable (1.5M, Black)</li> <li>▪ USB Cable (1.8M, Black) for touch</li> <li>▪ Audio Cable (1.5M, Black)</li> <li>▪ Hinge Stand (Black/White housing)</li> <li>▪ Startup Manual (Paper)</li> </ul>
VUE-3215-FD25PC-N4	VUE-3215-FD25PC-N3	Advantech 21.5" Full HD PCAP Touch Monitor (incl. China Power Cord)	
VUE-3215-FD25PX-N4	VUE-3215-FD25PX-N3	Advantech 21.5" Full HD PCAP Touch Monitor (incl. Europe, Taiwan, UK and US Power Cord)	

## Optional Accessories

Part Number	Description
960T-A15DEE-B0	Active Stylus Pen for VUE-2000 and VUE-3000 series, Black