

## Specification for LED Driver Series

### AB-D2030-V12-S

### AB-D2030-V24-S

#### Features:

- Universal AC input / (max 264VAC)
- Built-in active PFC function
- IP20, Suitable for dry environment
- Protections: Short Circuit / Over Voltage / Over Temperature
- Adopt plastic case
- Built-in lightning protection device, it can satisfy DM 1kV
- Complies with world lighting equipment safety standards
- 5 Years Warranty



#### Description:

AB-D2030-Vxx-S series is an indoor constant voltage LED driver with an input voltage range of 90-264Vac, whose efficiency is up to 85%, and it works in the temperature range of - 20 ° C to + 45 ° C under free air convection. It also has a high power factor, ultra-low total harmonic distortion, low standby power consumption, lightning protection, and other comprehensive protective functions, which not only greatly improve the reliability of the product, but also guarantee the product life cycle. This series of products is designed for LED lighting and is used in indoor lighting applications. It is suitable for a wide range of applications in almost every environment where LED luminaires can be installed. It complies with the World Safety standard for lighting equipment and ensures the safety of the user and the luminaire system during installation.

#### Model

Model	Rated Output Voltage	Rated Output Current	Maximum Output Power	Power Factor (Typ.)	Efficiency (Typ.)	THD (Typ.)
AB-D2030-V12-S	12V±5%	0-2.5A	30W	0.90	85%	8%
AB-D2030-V24-S	24V±5%	0-1.25A	30W	0.90	85%	8%

**Remark:** All parameters NOT specially mentioned are measured at 230VAC input, full load, and 25°C of ambient temperature.

## Input

Parameter	Minimum Value	Typical Value	Maximum Value	Note
Rated Input Voltage	100Vac		240Vac	Derating curve is shown in Figure
Input Voltage	90Vac		264Vac	
Input Frequency	47Hz		63Hz	
Maximum Input Current			0.5A	100Vac, Full Load
			0.25A	230Vac, Full Load
Input Inrush Current			75A	264Vac/50Hz, Cold Start
Power Factor		0.90		230Vac, Full Load
Total Harmonic Input		8%	10%	230Vac, Full Load
Leakage Current			0.75mA	230Vac/50Hz, Full Load
Stand-By Power Consumption		0.35W	0.5W	230Vac/50Hz, No Load

## Output

Parameter	AB-D2030-V12-S	AB-D2030-V24-S	Note
Output Voltage Range	11.4-12.6VDC	22.8-25.2VDC	Maximum Output power should comply to: $P_o = V_o \cdot I_o = 30W$
Rated Output Current	2.5A	1.25A	
Output Current	0-2.5A	0-1.25A	
Rated Output Power	30W	30W	
Rated Output Efficiency	85%	85%	230Vac
Output Voltage Precision	±5%		
Output Voltage Ripple (PK-PK)	±1%		Full Load (Test under 20M bandwidth)
Rise Time	100ms		230Vac
Startup Time	500ms		230Vac
Line Regulation	±1%		Full Load
Load Regulation	±2%		

## Characteristic Curve

Fig.1 Output Load-Temperature Curve:

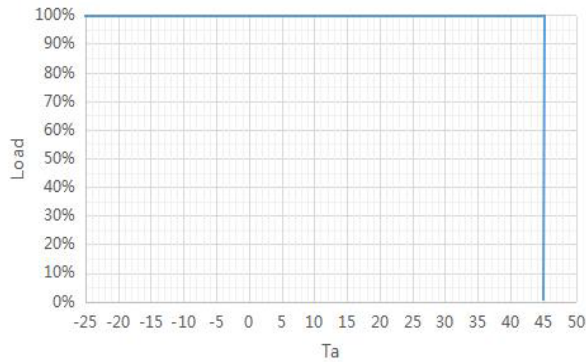


Fig.2 Static Characteristic Curve:

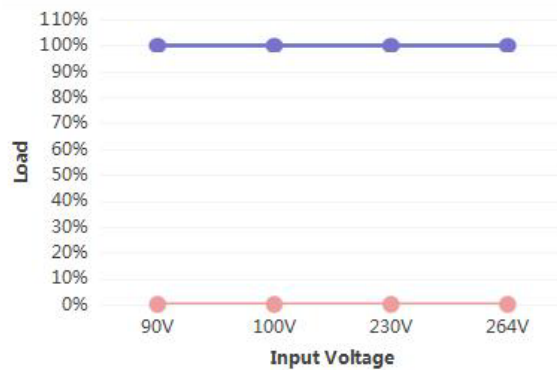


Fig.3 Power Factor Curve (PF):

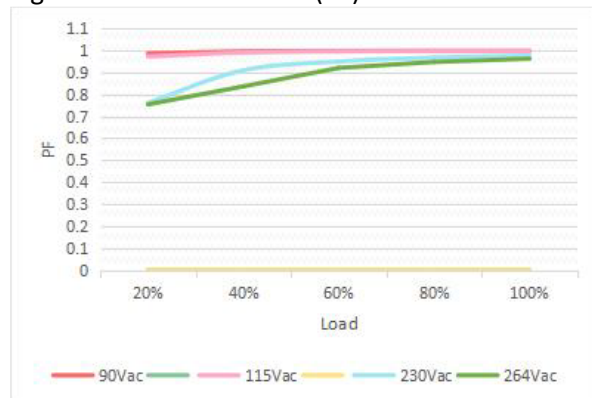


Fig.4 Total Harmonic Distortion Curve (THD):


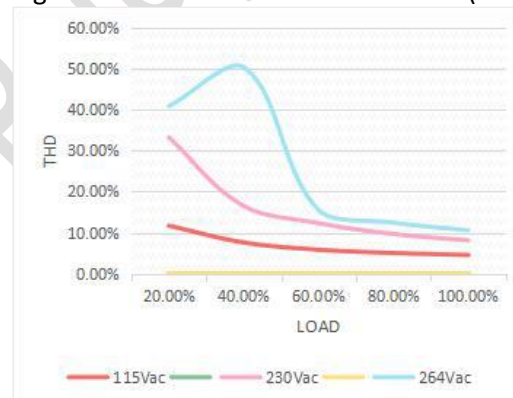


Fig.5 Efficiency-Load Curve:

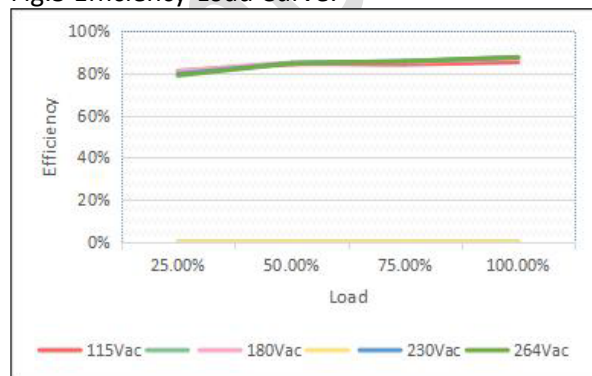

## Protection

Parameter		Conditions	Note
Protection	Overload	1.1-1.5 times rated load	Auto-recovery after overload removed
	Short Circuit	Short circuit power $\leq 1W$	Hiccup mode, auto-recovery after short circuit removed
	Over Voltage	$\leq 1.5$ times of rated output power	Auto-recovery after over voltage fault removed
	Over Temperature	$65 \pm 5^{\circ}C$	Auto-recovery after over temperature fault removed

## Environment Requirement

Parameter	Minimum	Typical	Maximum	Note
Working Temperature	$-20^{\circ}C$	$25^{\circ}C$	$+45^{\circ}C$	
Storage Temperature	$-40^{\circ}C$	$25^{\circ}C$	$+85^{\circ}C$	
Working Humidity	45%RH		85%RH	
Storage Humidity	5%RH		95%RH	
IP Grade			IP20	
Cooling Mode	Natural Cooling			

## Naming System:

### AB-D2030-V12-S

20: IP20

30: 30 Watts

V12: 12 Volts

S: Socket and connector output

### AB-D2030-V24-S

20: IP20

30: 30 Watts

V24: 24 Volts

TR: Socket and connector output

## Safety & EMC Standard

Certificate		Safety Standards	Certification	Note
UL/CUL		UL8750		
TUV		EN61347-1:2015 EN 61347-2-13:2014+A1 EN62493:2015		
SAA		AS/NZS 61347.2.13		
CCC		GB 19510.14-2009		
CE		EN 61347-2-13:2014 +A1 EN61347-1:2015		
Safety Test		Technical Indexes	Note	
Dielectric Strength	Input-Output	3750Vac/5mA Max/60s	Reinforced insulation, no breakdown, no flashover Test voltage: 500Vdc	
Insulation Resistance	Input-Output	≥50MΩ		
Leakage Current		≤0.75mA	240Vac	
EMI/EMS Item		Standard	Data	
Conduction CE		EN55015		
Radiation RE		EN55015		
Harmonics		EN IEC 61000-3-2	Class C	

## Others

Parameter	Condition	Note
Lifetime	30,000 Hours	230Vac, Full Load, TC: 75°C
MTBF	200,000 Hours	230Vac, Full load, Ta: 25°C (MIL-HDBK-217F)
TC	75°C	
Warranty	5 Years	TC: 80°C
Weight	156g±5g	
Dimensions	287.7*30*16.2mm	L x W x H

Mechanical Specification (Unit: mm)

