

## AMED100S-GY

Click to  
**ORDER**  
samples



DIN Rail

The AMED100S-GY is slim DIN-rail mounting AC/DC converter that features a cost-effective and energy efficient design. It accepts an input voltage range of 90-264VAC and an output voltage range from 12-48V. Measuring 55.00 x 100.00 x 92.00mm, the converter is easy to install and remove for maintenance, while efficiently organizing all your electrical cables.


This new series offers great operating temperatures, from -10°C to 60°C and features an isolation of 3000VAC for improved reliability and system safety. Furthermore, a high MTBF of 1,885,100h, output over-load protection, output short circuit protection, and output over-voltage protection come standard with the series.

The AMED100S-GY is suitable for electric distribution boxes, grid power, instrumentation, CNC machines, industrial control panels and building automation applications.

## Features


- Wide Input: 90 - 264VAC/127 – 370VDC
- Operating Temp: -10 °C to +60 °C
- Isolation voltage: 3000VAC
- Low ripple & noise, 120mV(p-p), 150mV(p-p), 200mV(p-p) max.
- Short circuit protection, over-voltage protection, and overload protection.
- DC OK Signal Output indication

## Summary

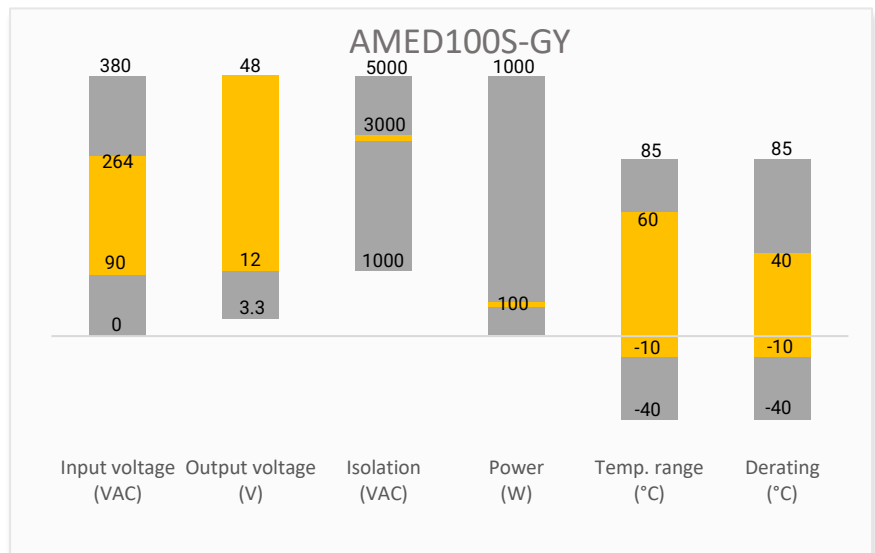


## Training

## Applications

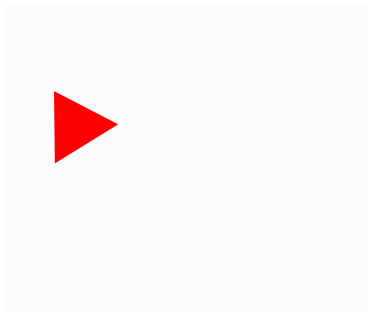

Product Training Video  
(click to open)



Application Notes



Power Grid



Industrial



Telecom

## Models & Specifications



Model	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Max Output wattage (W)	Output Voltage (V)	Output Current max (A)	Efficiency @ 230VAC Typ. (%)
AMED100S-12SGY	90~264/47~63	127~370	90	12	7.5	83
AMED100S-24SGY	90~264/47~63	127~370	96	24	4	86
AMED100S-48SGY	90~264/47~63	127~370	96	48	2	87

### Input Specifications

Parameters	Conditions	Typical	Maximum	Units
Input Current	115VAC	1.3		A
	230VAC	0.8		A
Inrush Current	115VAC, cold start	30		A
	230VAC, cold start	60		A
Leakage Current	240VAC	<1		mA

### Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy	0 - 100% load	± 2		%
Line regulation	Rated load	± 1		%
Load regulation	0 - 100% load	± 1		%
Ripple & Noise*	12 VDC Output		120	mV p-p
	24 VDC Output		150	mV p-p
	48 VDC Output		200	mV p-p
Start-up time	230VAC input, full load		3	s
	115VAC input, full load		3	s
Rise time	230VAC input, full load	50		ms
	115VAC input, full load	50		ms
Hold up time	230VAC input, full load	50		ms
	115VAC input, full load	20		ms
Voltage adjustable range	12 VDC Output	12 - 15		V
	24 VDC Output	24 - 30		V
	48 VDC Output	48 - 56		V

\* Ripple and Noise are measured at 20MHz bandwidth. Please refer to the application note for specific details. Measured with a 47μF electrolytic capacitor and a 0.1μF ceramic capacitor.

### Isolation Specifications



Parameters	Conditions	Typical	Maximum	Units
Tested I/O voltage	60 sec, Leakage current < 10mA	3000		VAC
Tested Input to GND voltage	60 sec, Leakage current < 10mA	2000		VAC
Tested Output to GND voltage	60 sec, Leakage current < 10mA	500		VAC
Tested Output to P-G signal	60 sec, Leakage current < 2mA	500		VAC

Insulation resistance	I to O, I/O to PE, 500VDC	100		MΩ
-----------------------	---------------------------	-----	--	----


General Specifications				
Parameters	Conditions	Typical	Maximum	Units
Over voltage protection	12 VDC Output, manual-recovery	≤ 18		VDC
	24 VDC Output, manual-recovery	≤ 36		VDC
	48 VDC Output, manual-recovery	≤ 64.8		VDC
Overload protection	105~150% rated output power, constant current limiting, auto-recovery			
Short circuit protection	Hiccup, Continuous, auto-recovery			
Operating temperature		-10 to +60		°C
Storage temperature		-40 to +85		°C
Power derating	+40 °C to +60 °C	2.0		% / °C
	90VAC - 100VAC	2.0		% / °C
Cooling	Free air convection			
Storage Humidity	Non-condensing		10~95	% RH
Case material	Plastic			
Weight		400		g
Dimensions (L x W x H)	2.17 x 3.94 x 3.62 inches (55.00 x 100.00 x 92.00 mm)			
MTBF	> 1,885.1k hrs min. Telcordia SR-332 (Bellcore)			
NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.				

Safety Specifications		
Parameters		
Agency approval	UL508, BS/EN62368-1	
Standards	EMC - Conducted and radiated emission	CISPR32 / EN55032, Class B
	Harmonic Current emission	IEC/EN 61000-3-2, Class A
	Voltage Fluctuations & Flicker	IEC/EN 61000-3-3
	Electrostatic Discharge Immunity	IEC/EN 61000-4-2 Contact ±4KV, Air ±8KV, Criteria B
	RF, Electromagnetic Field Immunity	IEC/EN 61000-4-3 3V/m, Criteria A
	Electrical Fast Transient/Burst Immunity	IEC/EN 61000-4-4 ±1KV, Criteria B
	Surge Immunity	IEC/EN 61000-4-5 L-L ±1KV, L-G ±2KV, Criteria B
	CS, Conducted Disturbance Immunity	IEC/EN 61000-4-6 3V, 3V~1V, 1V r.m.s, Criteria A
	Power Frequency Magnetic Field Immunity	IEC/EN 61000-4-8 50, 60Hz, Criteria A
	Voltage dips, Short Interruptions Immunity	IEC/EN 61000-4-11 100% Voltage Dips/Interruptions, 3 cycles, Criteria B

## Derating

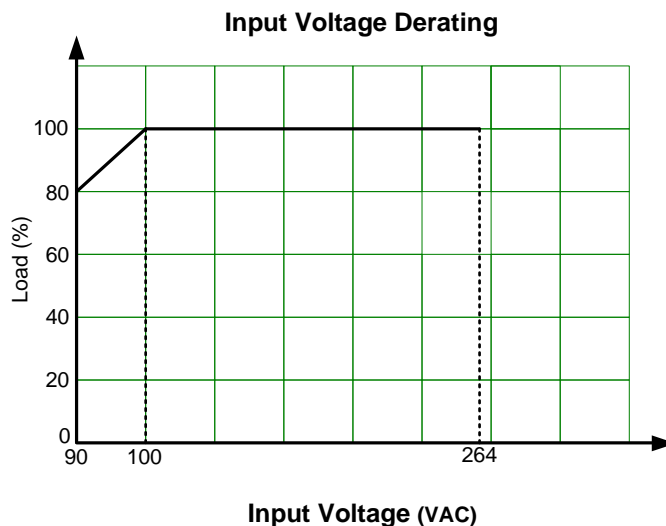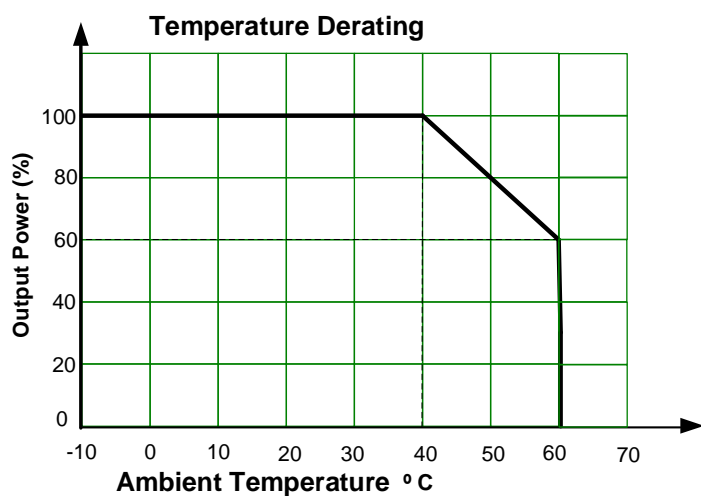


## Functional Diagram

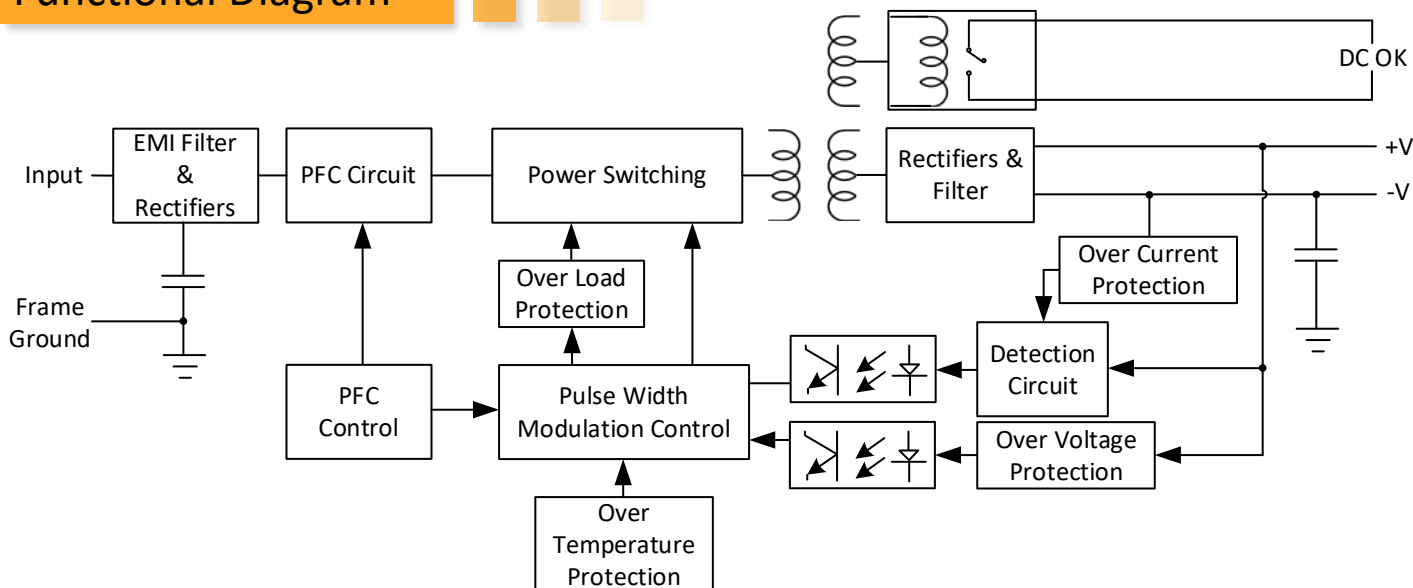

## DC OK Active Signal Application

Contact Closed	Power Supply Unit turns on / DC OK
Contact Open	Power Supply Unit turns off / DC FAIL
Contact Ratings (maximum)	30 V / 1 A resistive load

## Dimensions

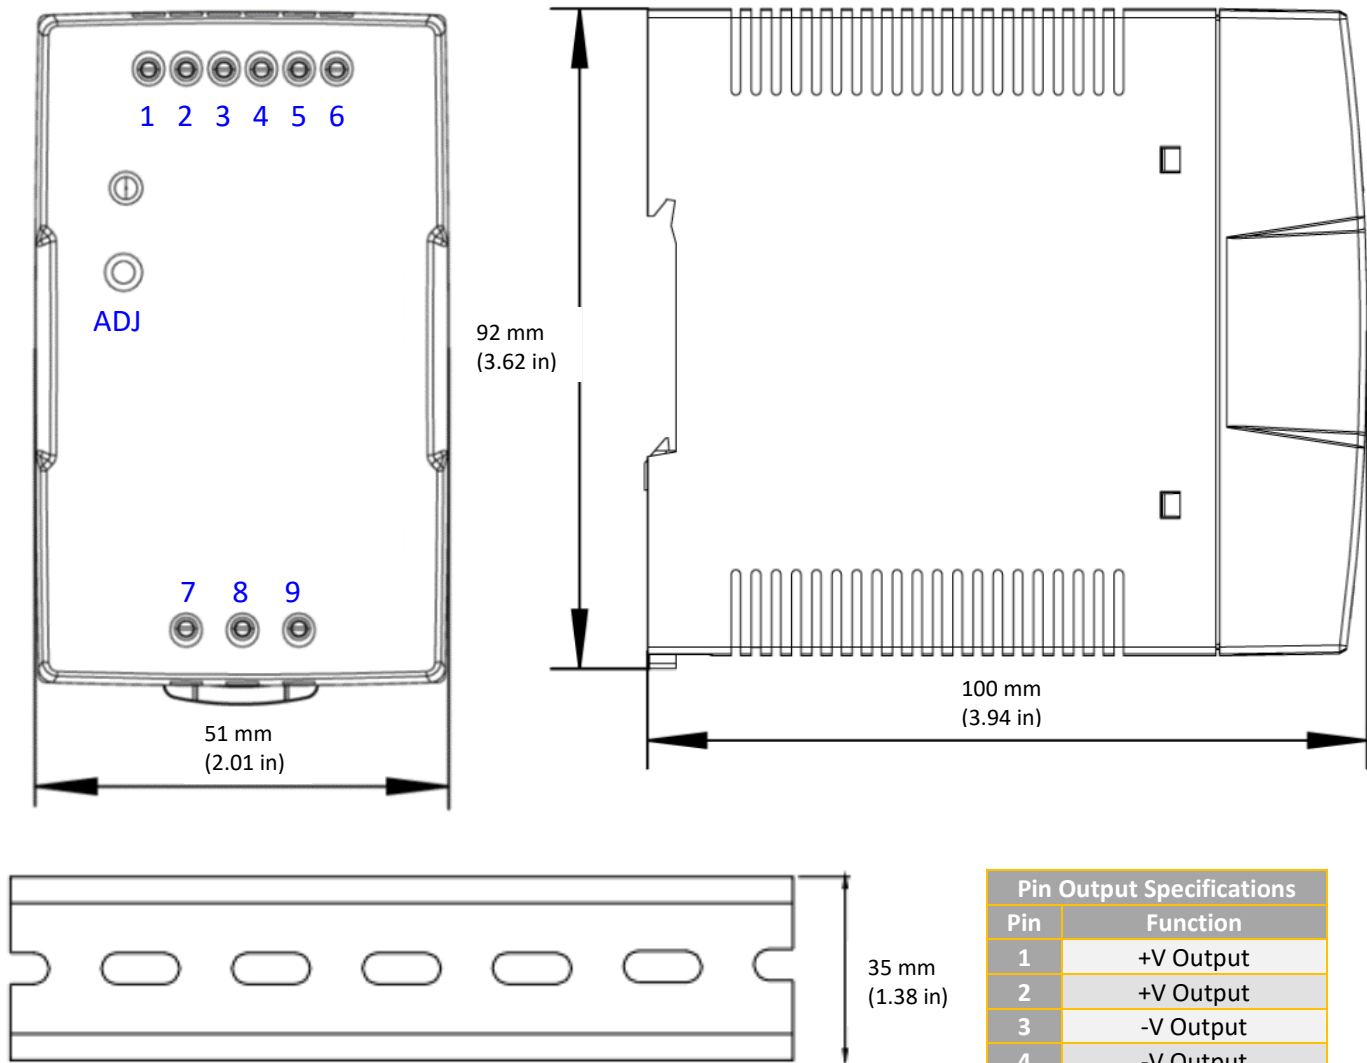

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

Unit: mm (inch)

General Tolerance:  $\pm 1.0$  (0.04)

Wire Gauge: Input 26 – 10AWG

Output 12V 16 – 10AWG

Output 24V 20 – 10AWG

Output 48V 22 – 10AWG

DC, OK 26 – 16AWG

Tightening Torque: 0.5N · m Max.

Mounting Rail: TS35, rail needs to connect to safety ground

Pin Output Specifications	
Pin	Function
1	+V Output
2	+V Output
3	-V Output
4	-V Output
5	DC
6	OK
7	GND $\equiv$
8	N
9	L
ADJ	Voltage Adjustment

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).