



2.75W Fixed Blade USB Charger - UK



Features

- Fixed Blade
- CoC Tier 2 Compliance
- Low Cost
- No Y Caps
- 3,048M Operating Altitude
- The charging scheme: Data Lines (Pins 2 and 3) Shorted

Applications

- Portable Electronics
- Personal Electronics



AQ03K Specifications¹


Model		AQ03K-050A-R	AQ03K-050AW-R ²
Output	DC Output Voltage	5.0V	
	Max Current	0.55A	
	Output Power	2.75W	
	Regulation	± 5%	
	Ripple & Noise P-P(max) ³	150mV	
Input	AC Input Voltage Range	90 to 264VAC	
	AC Input Frequency	47 to 63Hz	
	Input Current	0.1A (RMS) max	
	No Load Power Consumption at 115VAC Input	0.1W	
	No Load Power Consumption at 230VAC Input	0.075W	
	115VAC Average Efficiency ⁴	69.0%	
	230VAC Average Efficiency ⁴	69.0%	
	230VAC 10% Load Efficiency ⁴	> 59.9%	
	Leakage Current	20uA max @264VAC/63Hz	
Protection	Over-Voltage	7.5V max	
	Short Circuit	The output can be shorted without damage	
Environmental	Operating Temperature	0°C to +40°C	
	Non-Operating Temperature	-25° to +75°C	
	Operating Humidity	10% to 90% RH max	
Safety Approvals and EMC	Dielectric Withstand (HI-POT)	Primary to Secondary: 3000VAC for 1min, 10mA	
	Insulation Resistance	Primary to Secondary: >7M ohm for 500VDC	
	Standards	IEC 62368-1	
	EMI Emissions	EN 55032/CISPR 32 Class B Conducted and Radiated	
	Harmonic Current Emissions	IEC 61000-3-2	
	Voltage Fluctuations & Flicker	IEC 61000-3-3	
	Immunity	EN 55024/CISPR 24, EN55035/CISPR 35: IEC 61000-4-2 (Contact: ±8KV, Air: ±15KV), IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5 (±2kV), IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11	
Mechanical	Dimensions (L x W x H)	49.0mm (1.93in) x 48.8mm (1.92in) x 43.4mm (1.71in)	
	Weight	36g	
	DC Output Connector	USB-A, D+/D- shorted	
	Case Color	Black	White
Notes	<ol style="list-style-type: none"> The specifications defined are at ambient temperature of 25C, unless otherwise specified. Special Order. Minimum order quantity applies. 20MHz bandwidth frequency oscilloscope, add a 0.1µF multilayer Cap. and Low ESR Electrolytic Cap. (10µF) at output connector terminals (nominal line voltage, full load). Efficiency is measured after 30 minutes burn-in. 		

Phihong is not responsible for any error and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information. Revised 9/26/2024

--	--



AQ03K Outline Drawing

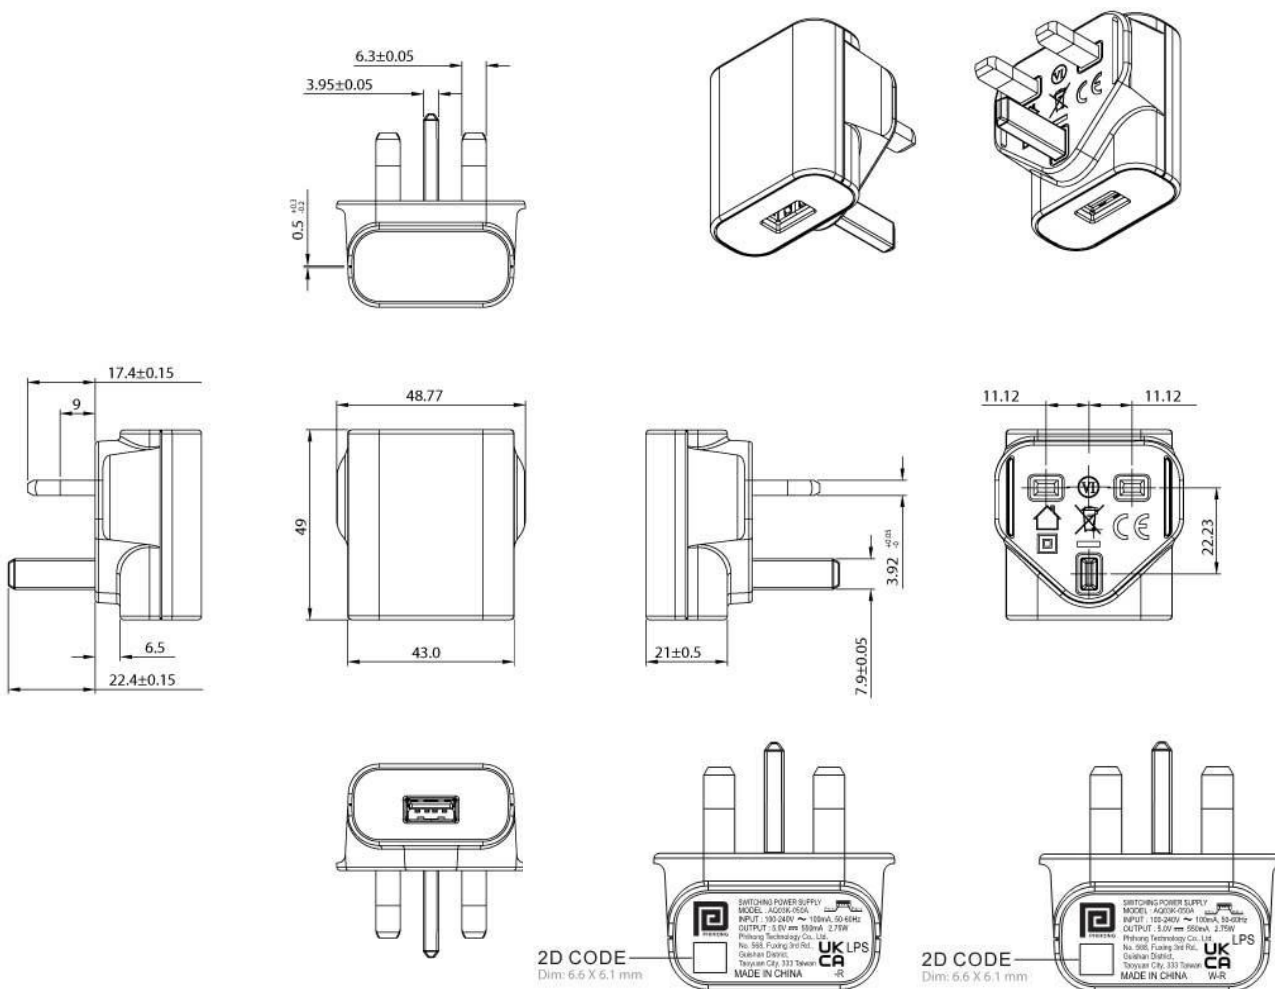



USB Cables – Sold Separately

Unit: mm

Part no: IP-USB1(C10)S	Desc: USB-A to Micro-B – 1 Meter – Black
Part no: IPUSB1CS	Desc: USB to Mini-B – 1.5 Meter – Black
Part no: IPUSB1MS	Desc: USB-A to Micro-B – 1.5 Meter – Black
Part no: IPUSB1M5LD	Desc: USB-A to Micro-B – 24AWG – Low Drop – 1.5 Meter – Black
Part no: IPUSB1P5	Desc: USB-A to Micro-B – 1 Meter – 24AWG – Black
Part no: IPUSB1P5W	Desc: USB-A to Micro-B – 1 Meter – 24AWG – White

Part no: IPUSB1MSW	Desc: USB-A to Micro-B – 1.5 Meter – White
<p>Technical drawing of the IPUSB1MSW cable. It shows a USB-A connector on the left (CN.1) and a Micro-B connector on the right (CN.2). The cable length is $*1500 \pm 50$. The USB-A connector has a width of 12.0 ± 0.3. The Micro-B connector has a width of $*5.4$. The cable is labeled with $UL2725 80^{\circ}C 30V$. The pins are labeled PIN 4, PIN 1, PIN 5, and PIN 1.</p>	
Part no: UES-1001A160	Desc: Low Drop Type-C USB Cable – 1 Meter – 23AWG on Power – 30AWG on Data - Black
<p>Technical drawing of the UES-1001A160 cable. It shows a Type-C connector on the left and a Type-C connector on the right. The cable length is 1000 ± 30. The connector width is $*6.4 \pm 0.1$. The cable is labeled with $UL2725 80^{\circ}C 30V 30\#*1P+1C 23\#*1C 24\#*2C$. The pins are labeled A1, A12, B1, B12, #1, and #2.</p>	
Part no: UES-1003A160	Desc: Low Drop Type-C USB Cable - 1 Meter – 23AWG on Power – 30AWG on Data - White
<p>Technical drawing of the UES-1003A160 cable. It shows a Type-C connector on the left and a Type-C connector on the right. The cable length is 1000 ± 30. The connector width is $*6.4 \pm 0.1$. The cable is labeled with $UL2725 80^{\circ}C 30V 30\#*1P+1C 23\#*1C 24\#*2C$. The pins are labeled A1, A12, B1, B12, #1, and #2.</p>	