



➡ GK220SXX-75W Switching Power Supply

Wide voltage input
Isolated voltage stabilized single output
AC/DC switching power supply



• Product Feature

- ◉ Full range of voltage input
- ◉ Metal mesh shell package, good heat dissipation
- ◉ Working temperature up to +60°C
- ◉ Wide application range
- ◉ Conform to international and domestic safety regulations
- ◉ High efficiency, high life and low power consumption
- ◉ International standard pin
- ◉ Comply with RoHS instruction
- ◉ Heat dissipation mode: natural air cooling

• Product Overview

GK220SXX-75W is the latest product developed by our company, the volume is 99 * 97 * 30mm, and has the characteristics of high efficiency and low power consumption

Products meet the requirements of green environmental protection, metal aluminum shell, with good shielding and anti-interference performance and electromagnetic compatibility, short circuit protection, self-recovery and other functions.

• Application Area

GK220SXX-75W series power supply has OVP, OLP, OTP and other complete protection function, in line with EN62368-1, EN61558, GB4943 and other international and domestic safety regulations, can be widely used in: Industrial control systems, industrial automation machinery, mechanical and electrical equipment, electronic instruments, electronic equipment and devices and household appliances and other fields.

• Product Brief Introduction

GK220SXX-75W series is a 75W single output power supply, the whole series provides 5V, 12V, 15V, 24V, 36V, 48V output, high output precision, and provides the output voltage external fine-tuning function. It is suitable for 90-264VAC full range AC input, with 30mm low height metal mesh shell design, not only small size, but also good heat dissipation ability, so that the whole series can operate for a long time under the ring temperature of -20°C to 60°C without fan.




➡ GK220SXX-75W Switching Power Supply Parameters

GK220SXX-75W						
Part No.	Input Voltage	Output Voltage	Full load output current	Efficiency	Input/Output isolation withstand voltage	Material
GK220S05-75W	90VAC~ 264VAC	5VDC±2%	15A Max	≥80%	3000VAC	Aluminum shell
GK220S12-75W	90VAC~ 264VAC	12VDC±2%	6.25A Max	≥85%	3000VAC	Aluminum shell
GK220S15-75W	90VAC~ 264VAC	15VDC±2%	5A Max	≥85%	3000VAC	Aluminum shell
GK220S24-75W	90VAC~ 264VAC	24VDC±2%	3.125A Max	≥88%	3000VAC	Aluminum shell
GK220S36-75W	90VAC~ 264VAC	36VDC±2%	2.083A Max	≥88%	3000VAC	Aluminum shell
GK220S48-75W	90VAC~ 264VAC	48VDC±2%	1.562A Max	≥88%	3000VAC	Aluminum shell



➡ Overall dimensions and pin patterns

- ⊙ Metal aluminum case package

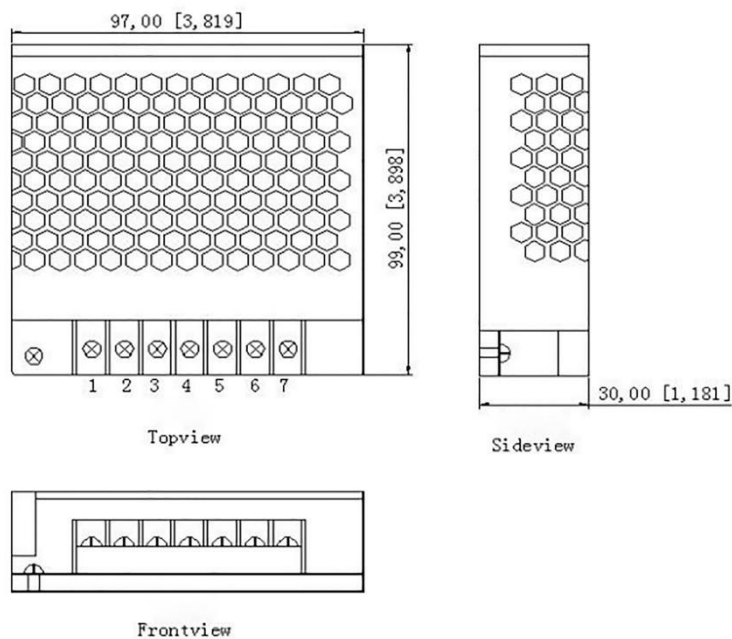

Pin definition:

Pin	Function
1	AC/L
2	AC/N
3	FG
4	DC OUTPUT -V
5	DC OUTPUT -V
6	DC OUTPUT +V
7	DC OUTPUT +V

Unit of size: mm[inch]

Unmarked tolerance: ± 0.25 [± 0.010]



Electrical Characteristics

Electrical Characteristics

Item	Symbol	Condition except as otherwise herein provided $V_i, -20^{\circ}\text{C} \leq T_c \leq 60^{\circ}\text{C}$	Limit Value		Unit
			Min	Max	
Output Voltage	V_o	Full Load	$V_o - 2\%V_o$	$V_o + 2\%V_o$	V
Max Output Current	$I_{o\max}$	-	-	P_o/U_o	A
Output Ripple Voltage	V_{p-p}	Full Load, V_i , BW=20MHz, Normal Temperature		XXmV p - p	mVp
Voltage regulation factor	S_v	$V_{i\min}$, V_i , $V_{i\max}$, Full Load	-	2.00	%
Load regulation	S_i	V_i , $I_o = (10\% \sim 100\%)I_{o\max}$	-	2.00	%
Efficiency	η	V_i , Full Load, Normal Temperature	80.00	-	%
Insulation Resistance	RI	Add 500VDC between the input and output points Room temperature, $t \geq 35$	50	-	MΩ


General Characteristic

EMC	Magnetic field sensitivity test Electrostatic discharge sensitivity test Radiation sensitivity test Conduction sensitivity test	GB6833.2-87 GB6833.3-87 GB6833.5-87 GB6833.6-87
Temperature excursion	0.02%/°C	
Frequency	47 Hz~63 Hz (MAX)	
Humidness	90% (max)	
Leak Current	5mA (max)	
MTBF	>500,000 Hours	




Temperature curve Efficiency curve


• Typical efficiency curve

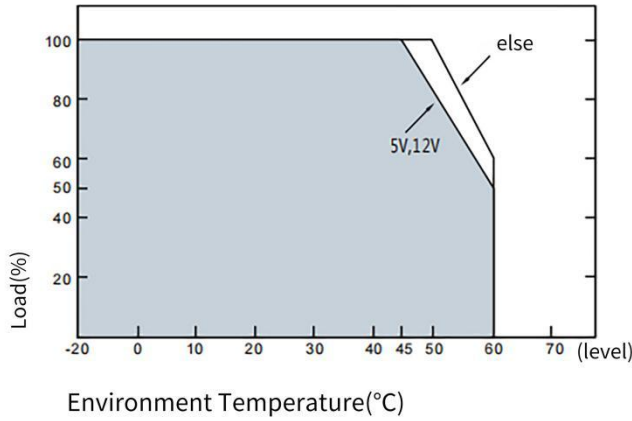


Temperature Derating Curve

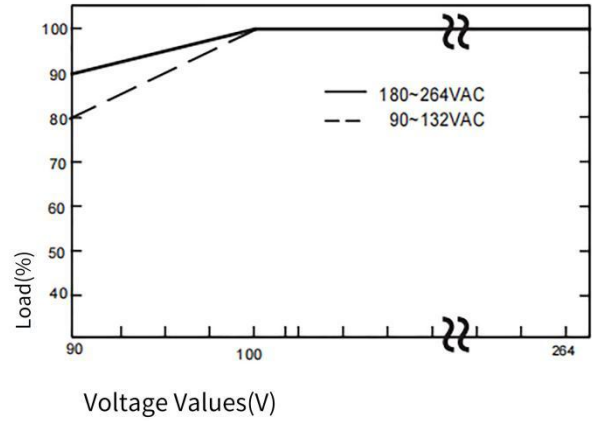

Voltage Derating Curve

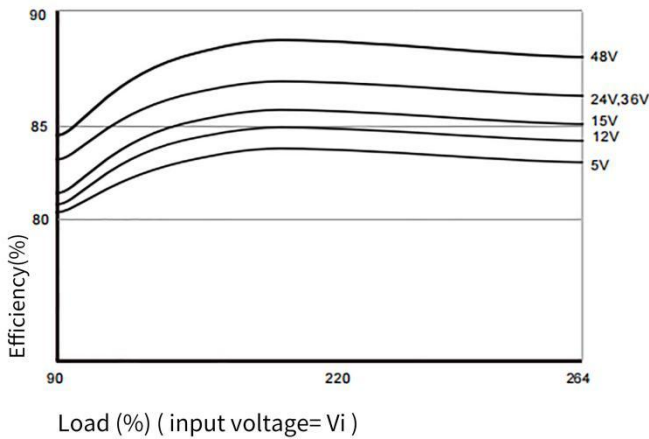

Efficiency/Load Graph

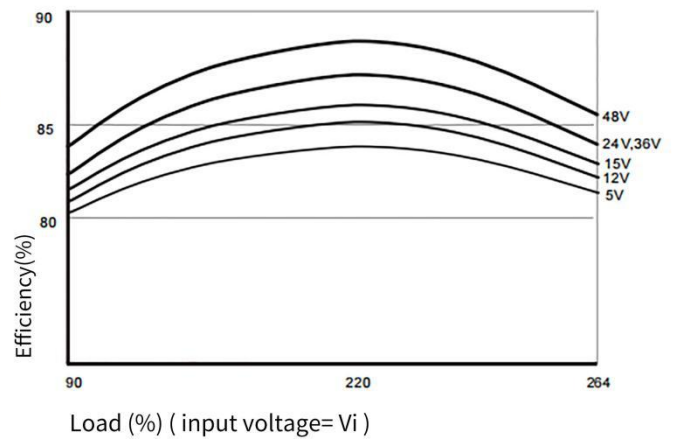


Efficiency/Input Voltage Graph



⇒ Typical efficiency curve notes matters

• Packing

This series of switching power supply is packaged in an independent heat shrinkable paper box.

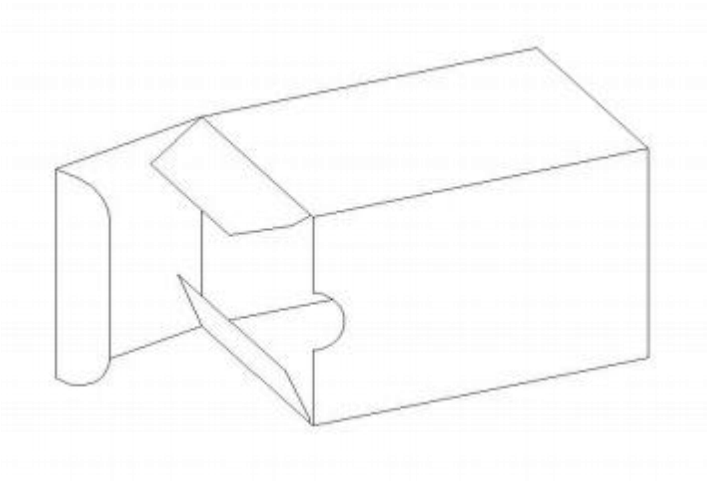

• Packing

The package equipped with switching power supply is allowed to be transported by any means of transport, which should avoid direct rain or snow and mechanical damage.

• Store

Switching power supply should be stored in the ambient temperature of -40 degrees ~ 85 degrees, relative humidity of 20%~90%, the surrounding environment without acid, alkaline and other harmful gases in the warehouse.

The above are the performance indicators of the product series listed in this manual. Some indicators of non-standard products may exceed the above requirements. In case of any inconsistency between the manual and the product specification documents, please refer to the specification documents.