


Technical requirements

- ①Rated voltage:3.0V
- ②Starting voltage:DC 1.2V
- ③No load current:50mA
- ④No load speed:38000±15%
- ⑤Rated load current:150mA 负载8#风叶
- ⑥Rated load speed:21000 ±10%
- ⑦Stall current:105mA Max
- ⑧Terminal resistance:14.0Ω ±20%
- ⑨End play:0.05~0.35mm
- ⑩Rotating direction:顺时针(CW)

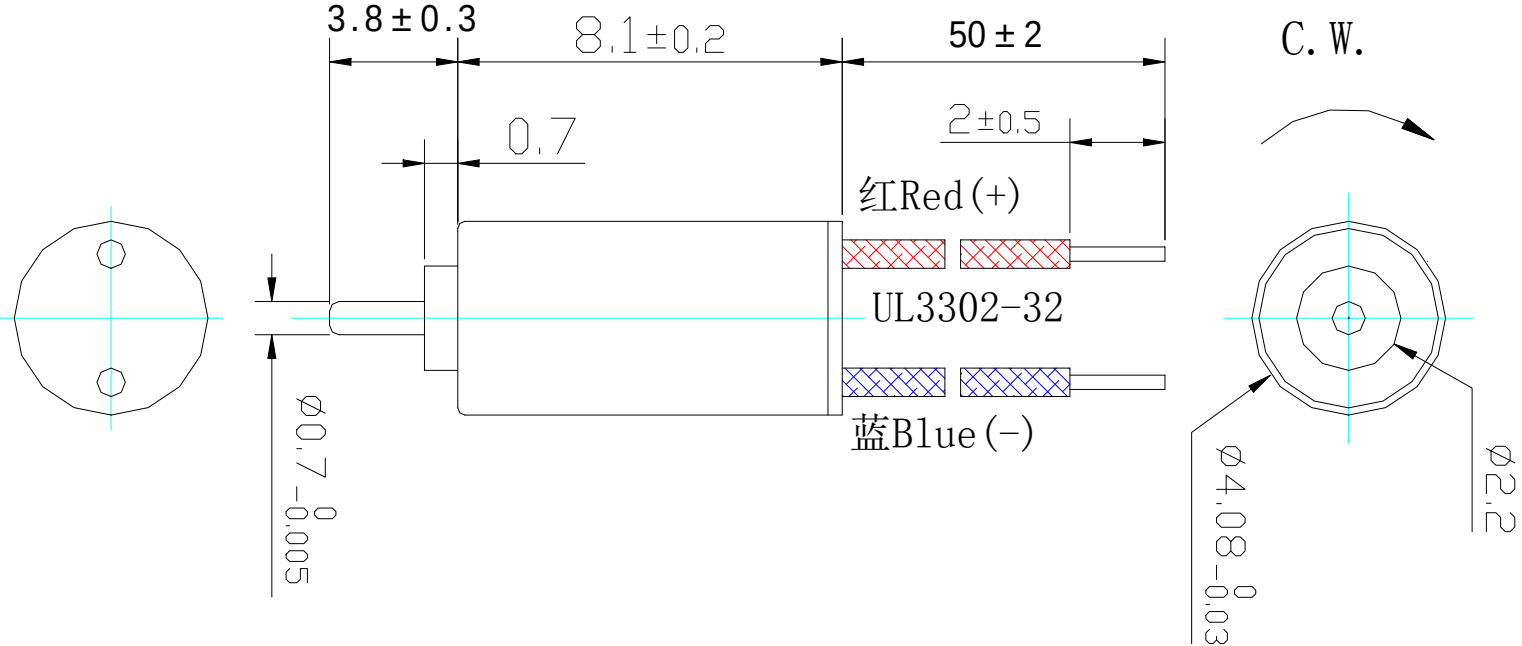

旧底图总号

底图总号

签 字

日 期

编 制	审 核	批 准	JYD0408L380-L50
		Amanda	
2014-11-04			

JIE YI ELECTRONICS LIMITED

比 例 1:1

/

MOTOR PERFORMANCE CURVES AND CHARACTERISTIC

马达特性曲线图


MODEL: JYD0408L380-L50

DIRECTION OF ROTATION: CW

VOLTAGE: 3.0 V

SSO#:

REV: A

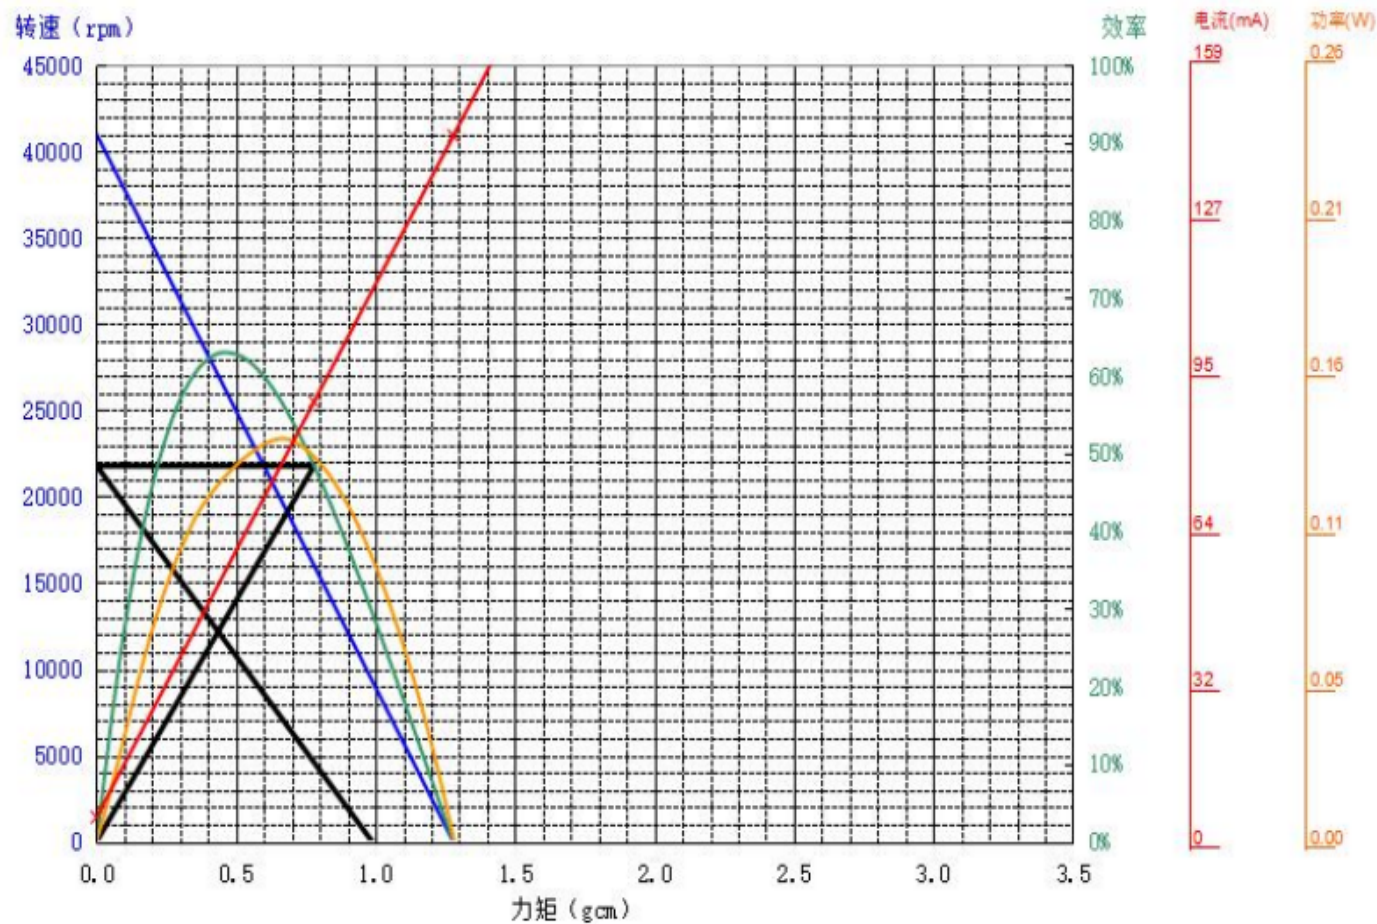

g.cm

THE CURVES REPRESENT THE THEORETICAL PERFORMANCE OF THE SAMPLE ONLY.

PREPARED BY: _____

CHECKED BY: _____

APPROVED BY: _____

曲線僅表示樣品的技術特性