





CATALOG LISTING
1CH106-6
PAGE 1 OF 1
RELEASE NO. PR-7978

ISSUE
11

REVISIONS

A	CO-77504-A	14 MAR 94
B	CO-75787-C	26 MAY 94
C	CO92293	5 FEB 98
D	CO94194	4 MAR 99
E	201294	27 SEP 00

RASTER
DRAWN
S A V 14 MAR 94

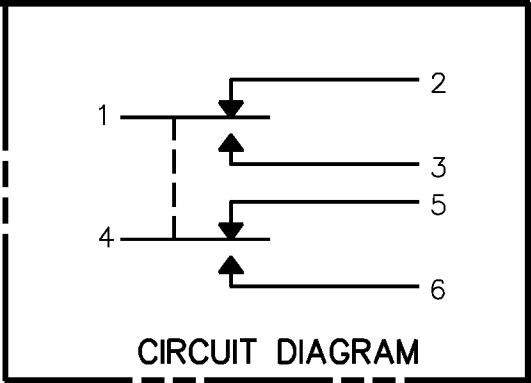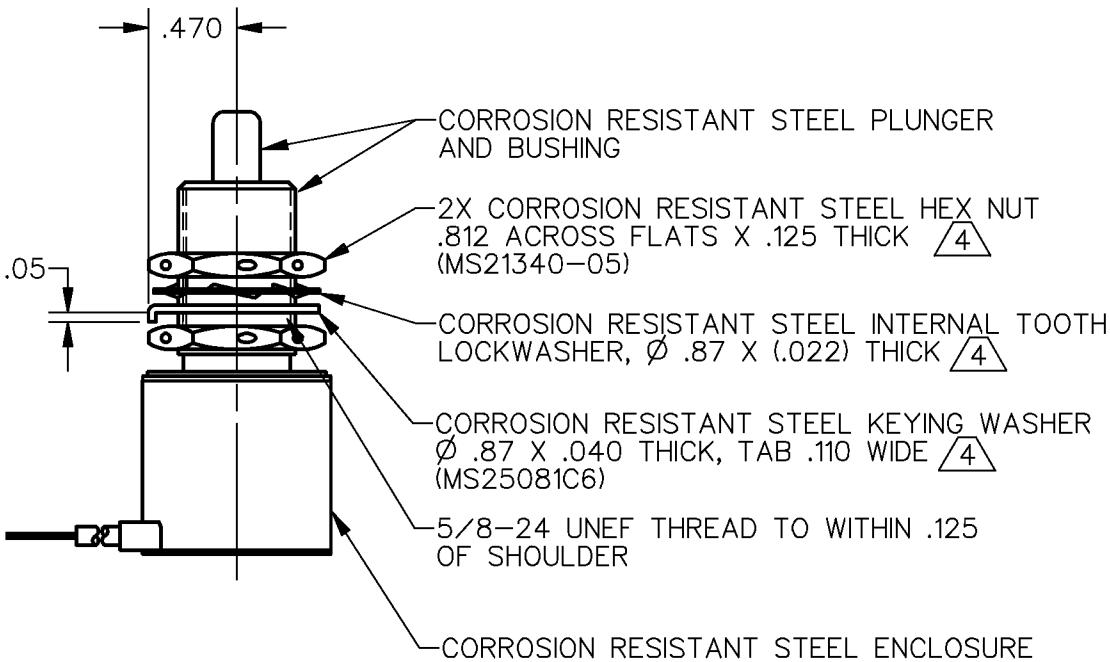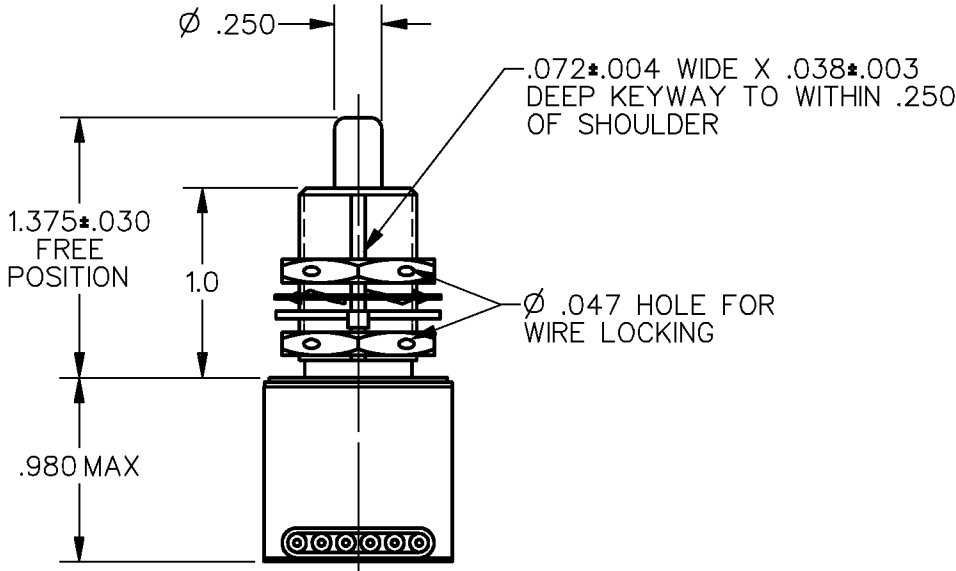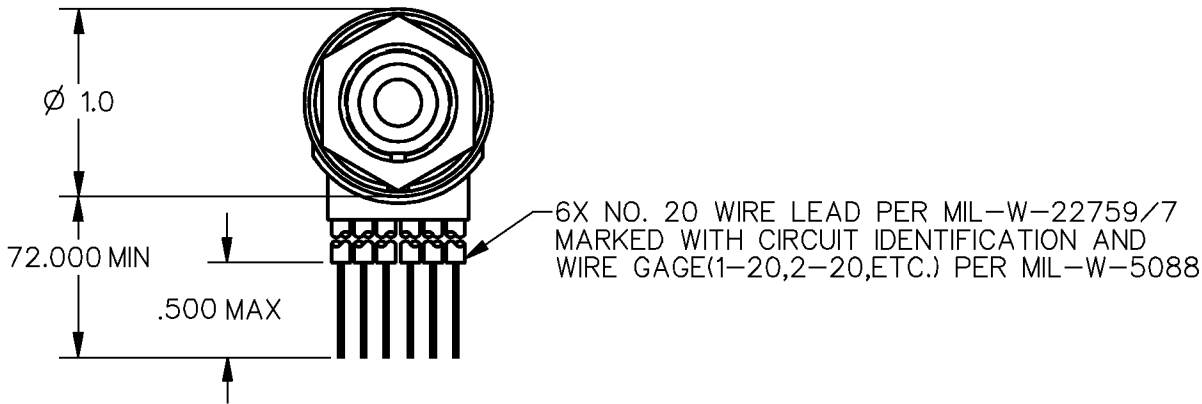

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	
OPERATING FORCE — — — —	6-12 LB
FULL OVERTRAVEL FORCE — — —	30 LB MAX
RELEASE FORCE — — — — —	4 LB MIN
PRETRAVEL — — — — —	.040 MAX
DIFFERENTIAL TRAVEL — — —	.020 MAX
OVERTRAVEL — — — — —	.250 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT 2X S P D T		
LOAD	28 VDC	
	SEA LEVEL	50,000 FT.
RES	4	4
IND	2	2
MOTOR	4	

THIRD ANGLE PROJECTION	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) $\pm$.030
TWO PLACE	(.00) $\pm$.015
THREE PLACE	(.000) $\pm$.005
ANGLES	$\pm$
WEIGHT	7.0 OZ MAX

- NOTES
- 1 — SWITCH SEALED PER MIL-PRF-8805, SYMBOL 3
 - 2 — MICRO SWITCH IDENTIFICATION, CIRCUIT DIAGRAM, CATALOG LISTING, FED. MFG. CODE AND DATE CODE ARE PERMANENTLY MARKED ON SIDE OF HOUSING
 - 3 — COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
 - 4 — HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

ANSI Y14.5M-1982 APPLIES