

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FED. MFR. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
1CH54L C063259
TSK
15 APR 88
M C068502
TSM
19 OCT 90

1CH54

M

DRAWING
NUMBER

X 13

X 8

X 8

X 8

REVISIONS

A	SR11371	MBF	25 MAR 64
B	C020147	RER	10 AUG 65
C	C021694	RER	20 JUL 66
D	C022953	MBF	2 NOV 67
E	C028681	KAS	7 SEP 71
F	C033906	RER	1 NOV 74
G	C034722	JAL	7 JAN 75
H	C044646	CO	2 DEC 78
J	C044351	SLB	8 JAN 79
K	C047573	CO	24 JUL 80

JMJ

24 JUL 80

MBF

3 MAY 63

MBF

3 MAY 63

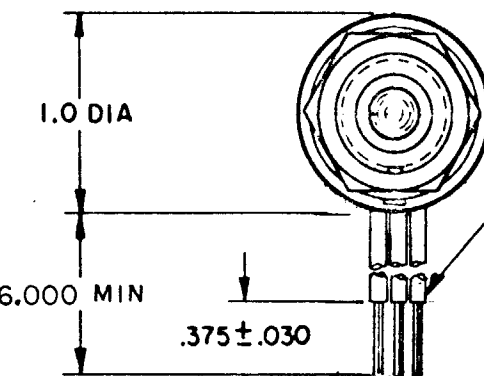
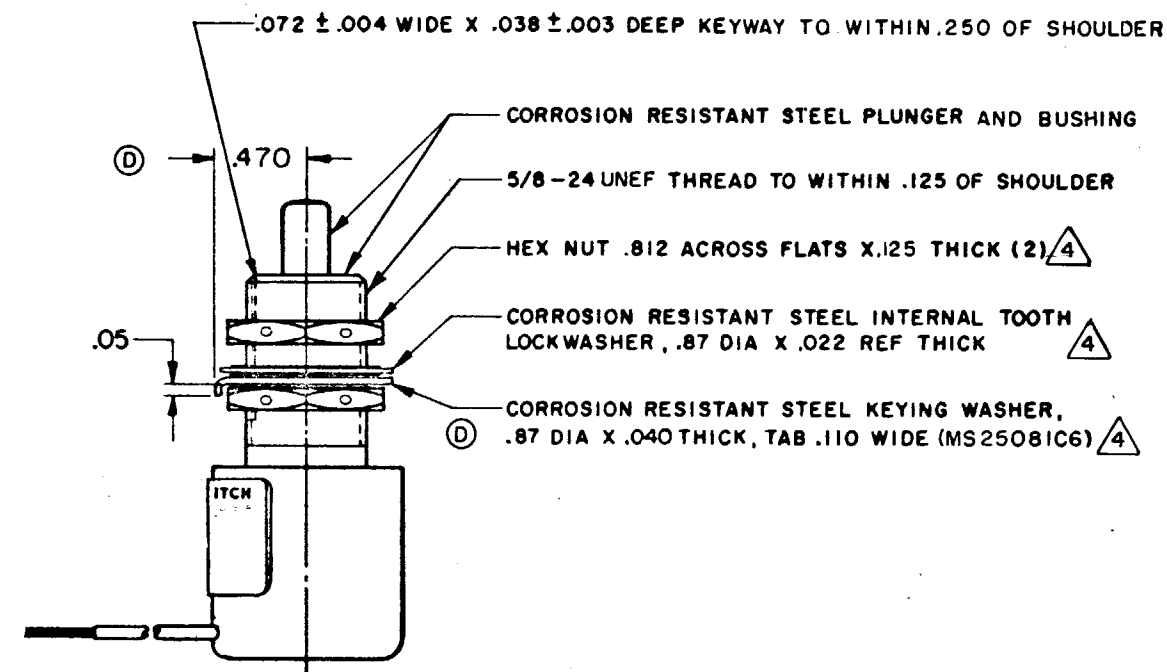
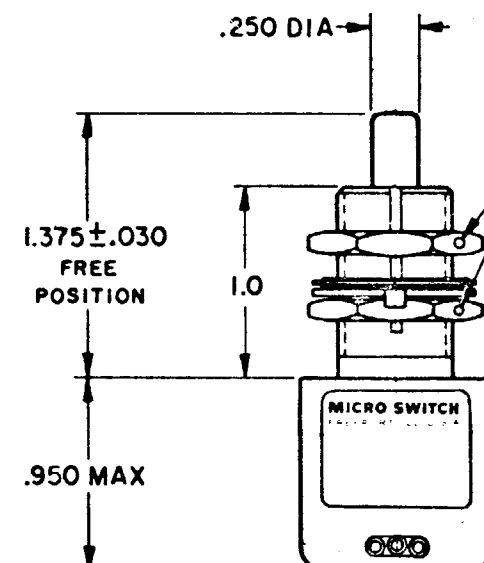
MBF

3 MAY 63

MBF

3 MAY 63

MBF

(3) NO. 20 WIRE LEAD PER MIL-W-22759/7 MARKED WITH
CIRCUIT IDENTIFICATION AND WIRE GAGE (1-20, 2-20 ETC)
PER MIL - W - 5088

CIRCUIT DIAGRAM

NOTES

- 1 - CORROSION RESISTANT STEEL ENCLOSURE
- 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 2
- 3 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
- 4 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL
OPERATING FORCE — — — — 3-6 LB		CONTACT ARRANGEMENT		DO NOT SCALE PRINT
FULL OVERTRAVEL FORCE — 17 LB MAX		S P D T		UNLESS OTHERWISE SPECIFIED
RELEASE FORCE — — — — 2 LB MIN		28 VDC		DIMENSIONS ARE IN INCHES
PRETRAVEL — — — — .040 MAX		SEA LEVEL 50,000 FT.		TOLERANCES ARE:
DIFFERENTIAL TRAVEL — — .020 MAX		LOAD		ONE PLACE (.0) 2.000
OVERTRAVEL — — — — .250 MIN		RES	4	TWO PLACE (.00) 2.018
		IND	2	THREE PLACE (.000) 2.000
		MOTOR	4	ANGLES 2
				WEIGHT 3.0 OZ MAX