

1CH64-25

M

DRAWING
NUMBER

12

ISSUE

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

REPLACES

PR-2376

27OCT05

RJ

CHECK

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12

12



12

12

12

12

12

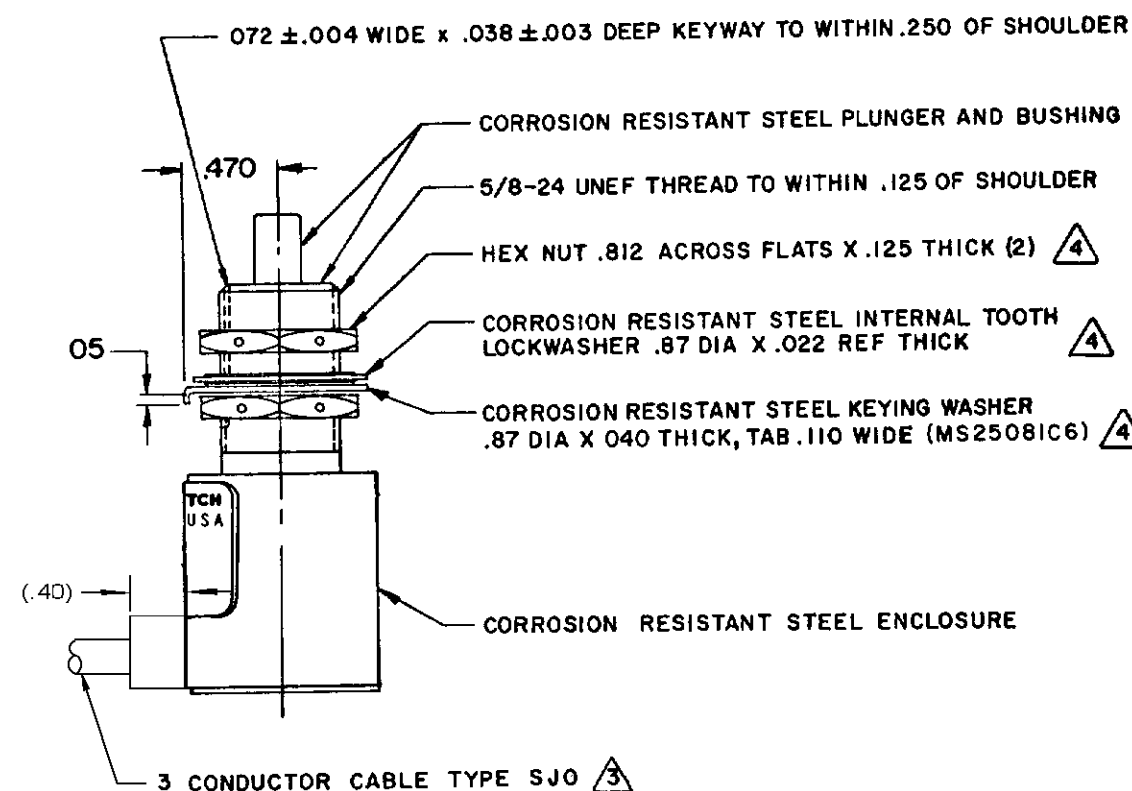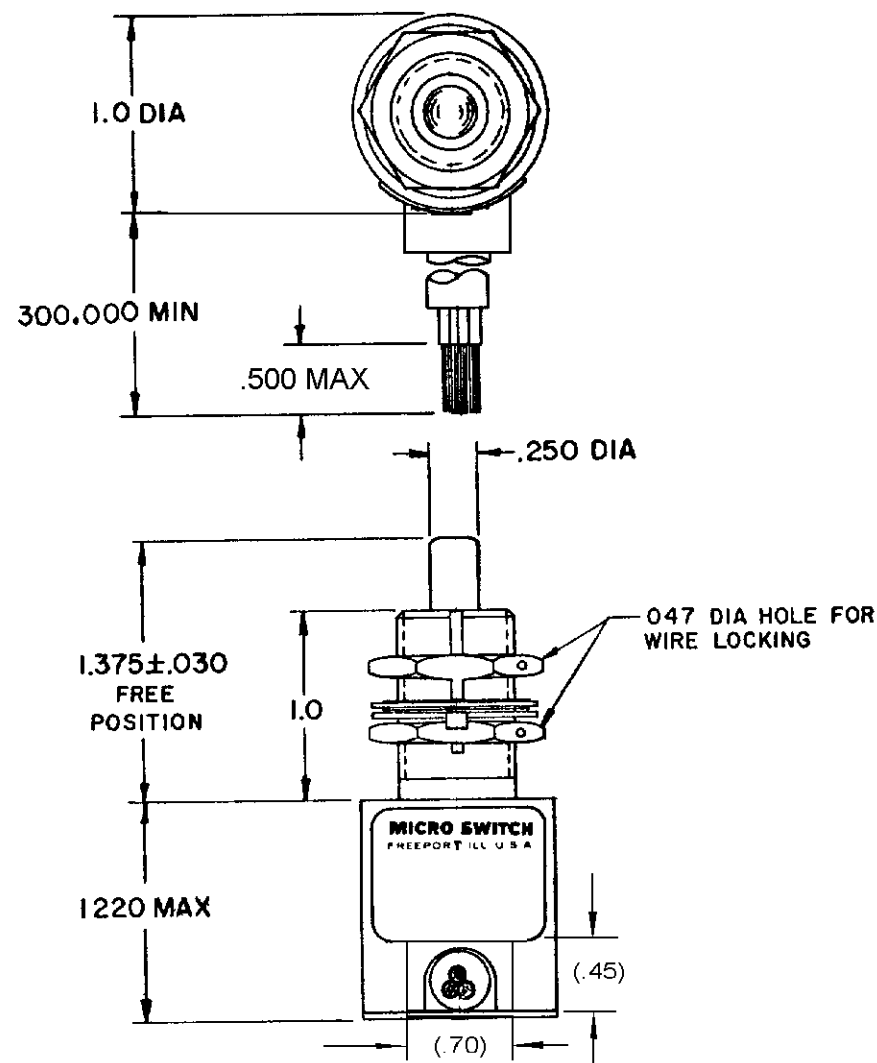

NOTES

- 1 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 3
- 2 - CIRCUIT DIAGRAM, CATALOG LISTING AND DATE CODE ARE SHOWN ON NAMEPLATE
- 3 - WIRE LEADS COLOR CODED TO SHOW LEAD IDENTIFICATION
- 4 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL
OPERATING FORCE ——— 6-12 LB		CONTACT ARRANGEMENT		DO NOT SCALE PRINT
FULL OVERTRAVEL FORCE ——— 30 LB MAX		S P D T		UNLESS OTHERWISE NOTED
RELEASE FORCE ——— 4 LB MIN		28 VDC		DIMENSIONS ARE IN INCHES
PRETRAVEL ——— .040 MAX		LOAD	SEA LEVEL 50,000 FT.	TOLERANCES ARE:
DIFFERENTIAL TRAVEL ——— .020 MAX		RES	4 4	ONE PLACE (.0) ±.030
OVERTRAVEL ——— 250 MIN		IND	2 2	TWO PLACE (.00) ±.015
		MOTOR	4	THREE PLACE (.000) ±.005
		LAMP		ANGLES ±
				WEIGHT 37.0 OZ MAX