## SIEMENS

## Data sheet

## 3SU1031-0BB50-0AA0



Illuminated pushbutton, 22 mm, round, plastic with metal front ring, blue, pushbutton, raised momentary contact type

product brand name	SIRIUS ACT	
product designation	Illuminated pushbuttons	
design of the product	Actuating/signaling element	
product type designation	3SU1	
product line	Plastic with metal front ring, matt, 22 mm	
Enclosure		
number of command points	1	
Actuator		
design of the actuating element	Raised button	
principle of operation of the actuating element	momentary contact type	
product extension optional		
light source	Yes	
contact module	Yes	
color of the actuating element	blue	
material of the actuating element	plastic	
shape of the actuating element	round	
outer diameter of the actuating element	29.5 mm	
Front ring		
product component front ring	Yes	
design of the front ring	Standard	
material of the front ring	Metal, matt	
color of the front ring	sand gray	
General technical data		
protection class IP	IP66, IP67, IP69(IP69K)	
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13	
shock resistance		
<ul> <li>according to IEC 60068-2-27</li> </ul>	sinusoidal half-wave 15g / 11 ms	
<ul> <li>for railway applications according to EN 61373</li> </ul>	Category 1, Class B	
vibration resistance		
<ul> <li>according to IEC 60068-2-6</li> </ul>	10 500 Hz: 5g	
<ul> <li>for railway applications according to EN 61373</li> </ul>	Category 1, Class B	
operating frequency maximum	3 600 1/h	
mechanical service life (operating cycles) typical	3 000 000	
reference code according to IEC 81346-2	S	
Substance Prohibitance (Date)	10/01/2014	
Ambient conditions		
ambient temperature		
during operation	-25 +70 °C	
during storage	-40 +80 °C	
environmental category during operation according to IEC	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)	

60721	
Installation/ mounting/ dimensions	
height	29.5 mm
width	29.5 mm
shape of the installation opening	round
mounting diameter	22.3 mm
positive tolerance of installation diameter	0.4 mm
mounting height	16.2 mm
installation width	29.5 mm
installation depth	24.3 mm
Certificates/ approvals	

General Product Approval

Declaration of Conformity



Type Test Certificates/Test Report









**Test Certificates** 

Special Test Certificate Marine / Shipping










## other

**Confirmation** 

Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business	
Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you inten EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).	nd to import or offer to supply these products to ar
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875	
Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10	
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1031-0BB50-0AA0	
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1031-0BB5	50-0AA0
Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3SU1031-0BB50-0AA0	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagram http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1031-0BB50-0AA0⟨=en	ns, EPLAN macros,)

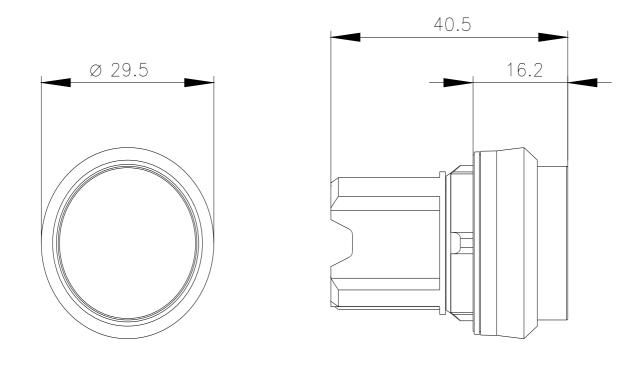

last modified:

1/26/2022 🖸