



MICRO SWITCH

FED. MFR. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
21CH186-6

CIRCUIT DIAGRAM

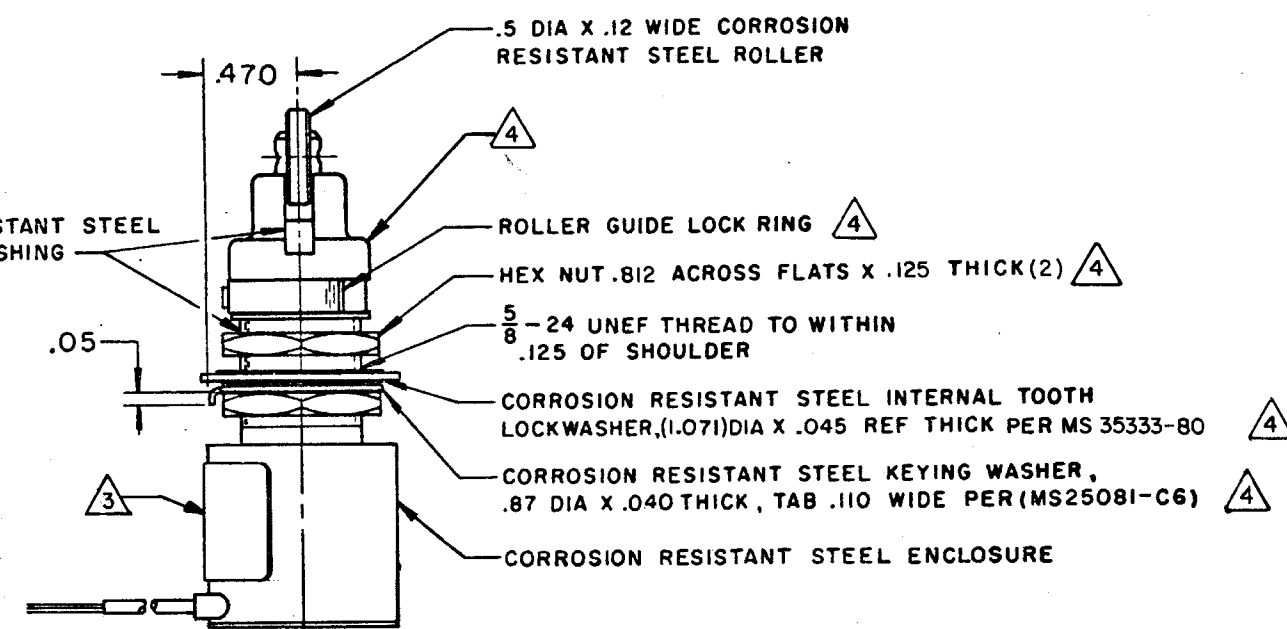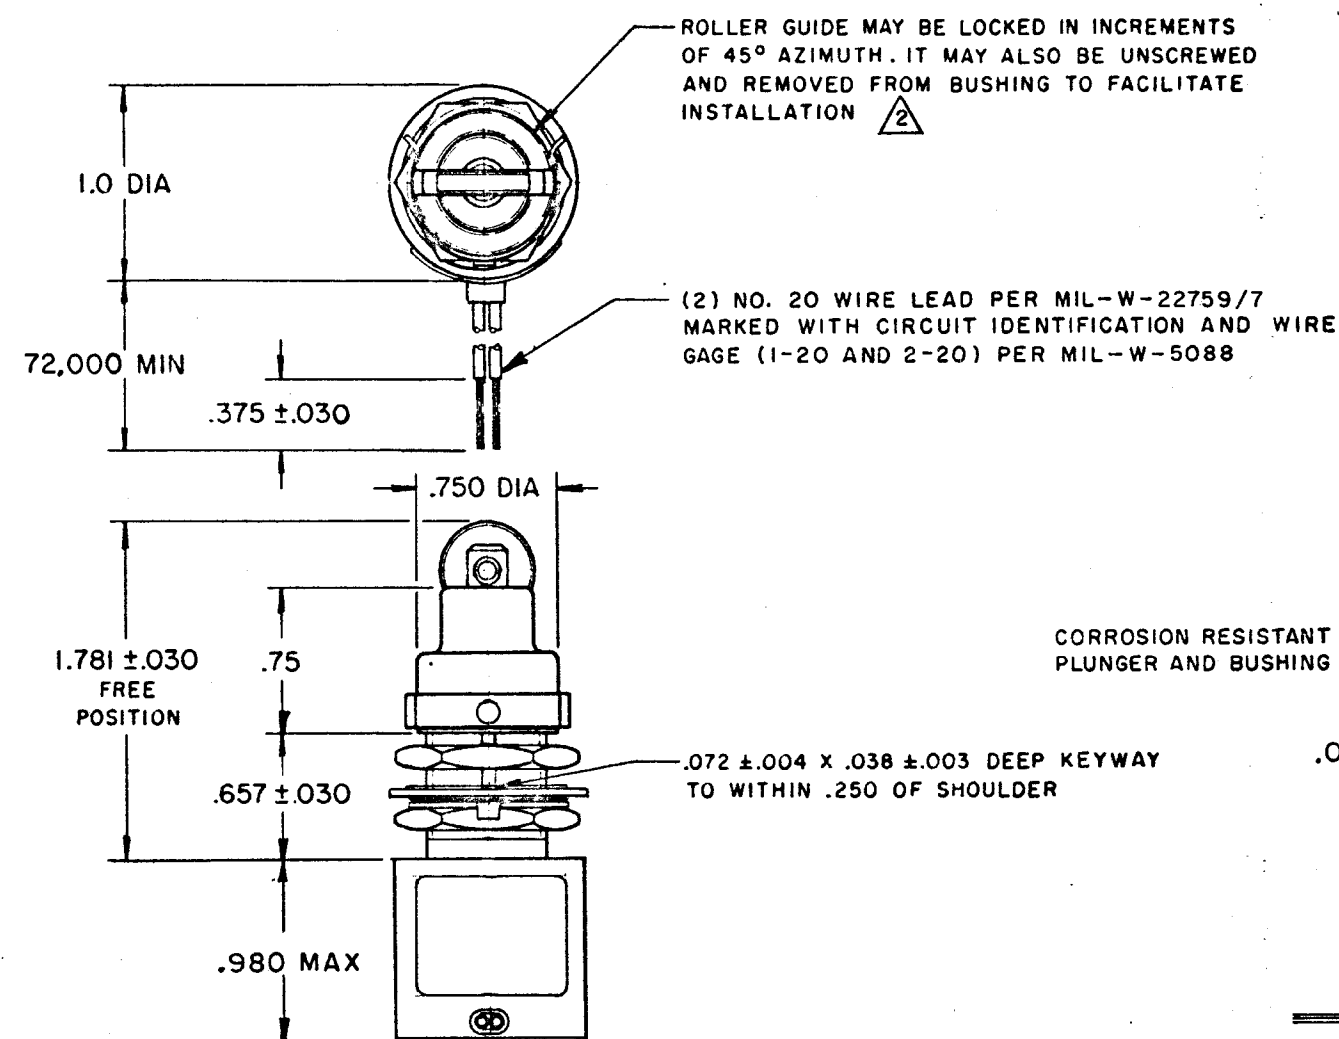

NOTES

- 1 - SWITCH SEALED PER MIL-S-8805 SYMBOL 3
- 2 TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK RING
- 3 CAT. LIST., MICRO IDENTIFICATION, CIRCUIT DIAGRAM AND DATE CODE ARE SHOWN ON NAMEPLATE
- 4 HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE	FULL
OPERATING FORCE — — — — 6-12 LB		CONTACT ARRANGEMENT		DO NOT SCALE PRINT	
FULL OVERTRAVEL FORCE — — 30 LB MAX		S P N C		UNLESS OTHERWISE SPECIFIED	
RELEASE FORCE — — — — 4 LB MIN		28 VDC		DIMENSIONS ARE IN INCHES	
PRETRAVEL — — — — .040 MAX		LOAD	SEA LEVEL	TOLERANCES ARE:	
DIFFERENTIAL TRAVEL — — .020 MAX		RES	50,000 FT.	ONE PLACE (.0)	±.030
OVERTRAVEL — — — — .250 MIN		IND	4	TWO PLACE (.00)	±.015
		MOTOR	2	THREE PLACE (.000)	±.005
			4	ANGLES	±
				WEIGHT 6.0 OZ MAX	