

MICRO SWITCH

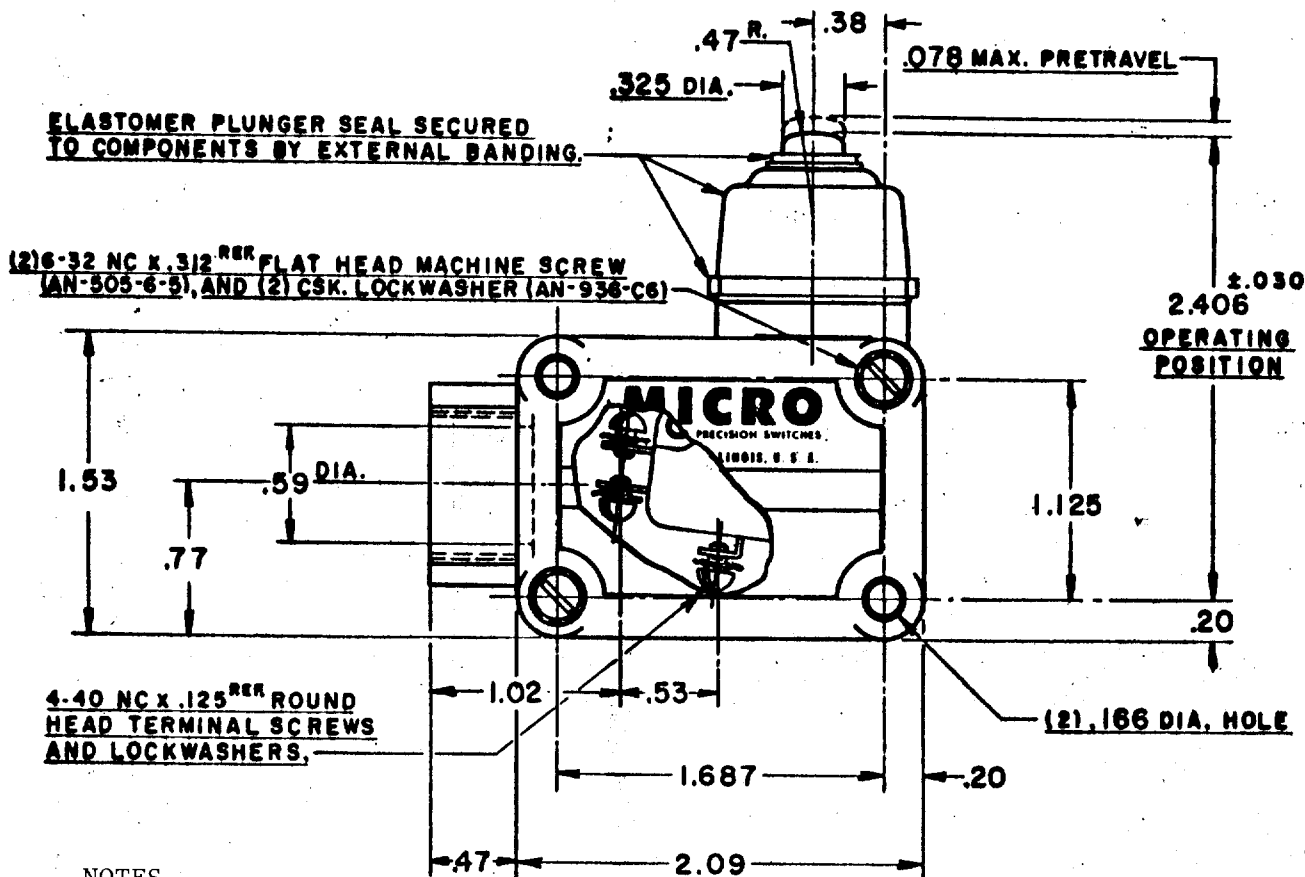
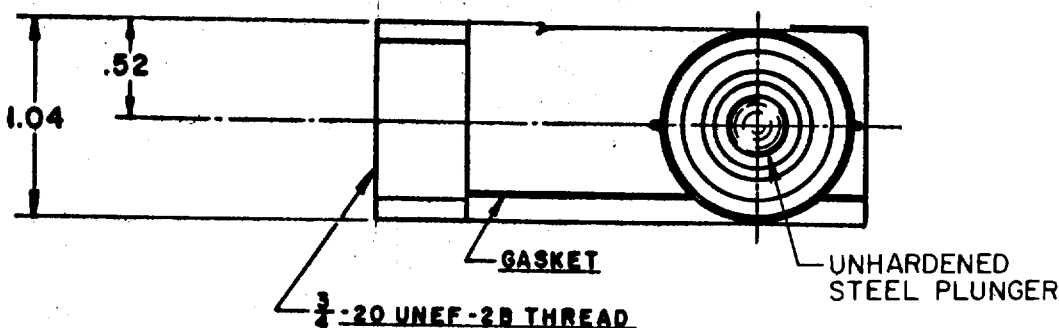
FREEPORT ILLINOIS, U.S.A.

A DIVISION OF HONEYWELL INC.

FED. MFG. CODE 91929

SWITCH-ENCLOSED


CATALOG LISTING

2VBI**NOTES**

- 1 - UNIT INCLUDES (2) CAT. LIST. V3-1001 BASIC SWITCH (MS25253-1)
- 2 - ALUMINUM ENCLOSURE ZINC PHOSPHATE COATED AND FINISHED WITH ONE COAT PRIMER
- 3 - SWITCH WILL PERFORM SATISFACTORILY IN TEMPERATURES TO MINUS 65°F
- 4 - SWITCHES DO NOT OPERATE SIMULTANEOUSLY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE ----- 5 LBS MAX

RELEASE FORCE ----- 1/2 LB MIN

DIFFERENTIAL TRAVEL ----- .031 MAX

OVERTRAVEL ----- .250 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T (2)

10 AMPS RES. 10 AMPS IND. (SEA LEVEL)
6 AMPS IND. (50,000 FT)
6 AMPS MOTOR LOAD, 30 VDC

SCALE FULL

DO NOT
SCALE PRINTUNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .27 LB

M 2VBIDRAWING
NUMBER

ISSUE

M12

REVISIONS

A

C063567

WJM

13 MAY 88

B

204536

JAH

12 DEC 01

RASTER

DRAWN

WJM 13 MAY 88 CHECK D JS 24 MAY 88 CHECK