SIEMENS

Data sheet

3SU1001-1AD50-0AA0



Illuminated mushroom pushbutton, 22 mm, round, plastic, blue, 30 mm, momentary contact type

product brand name	SIRIUS ACT		
product designation	Mushroom pushbuttons		
design of the product	Actuating/signaling element		
product type designation	3SU1		
product line	Plastic, black, 22 mm		
Enclosure			
number of command points	1		
Actuator			
design of the actuating element	illuminated		
principle of operation of the actuating element	momentary contact type		
product extension optional light source	Yes		
color of the actuating element	blue		
material of the actuating element	plastic		
shape of the actuating element	round		
outer diameter of the actuating element	30 mm		
number of switching positions	2		
Front ring			
product component front ring	Yes		
design of the front ring	Standard		
material of the front ring	plastic		
color of the front ring	black		
General technical data			
product function			
 EMERGENCY OFF function 	No		
 EMERGENCY STOP function 	No		
protection class IP	IP66, IP67, IP69(IP69K)		
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13		
shock resistance			
 according to IEC 60068-2-27 	sinusoidal half-wave 15g / 11 ms		
 for railway applications according to EN 61373 	Category 1, Class B		
vibration resistance			
according to IEC 60068-2-6	10 500 Hz: 5g		
for railway applications according to EN 61373	Category 1, Class B		
operating frequency maximum	3 600 1/h		
mechanical service life (operating cycles) typical	3 000 000		
reference code according to IEC 81346-2	S		
Substance Prohibitance (Date)	10/01/2014		
Ambient conditions			
ambient temperature			
 during operation 	-25 +70 °C		

during storage		-40	-40 +80 °C			
environmental category during operation according to IEC 60721		ng to IEC 3M6, 3	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)			
nstallation/ mounting/	dimensions					
height		30 mm	1			
width		30 mm	30 mm			
shape of the installation opening		round	round			
mounting diameter		22.3 m	22.3 mm			
positive tolerance of installation diameter		0.4 mn	0.4 mm			
mounting height		27.5 m	27.5 mm			
installation width		30 mm	30 mm			
installation depth		24.4 m	24.4 mm			
Certificates/ approvals						
General Product Approval			Declaration of Conformity			
CSA		UL	EHL	UK CA	EG-Konf.	
Test Certificates		Marine / Shipping				
Type Test Certific- ates/Test Report	Special Test Certific- ate	ABS	Llovd's Kegister us	PRS	RINA	
other	Environment					
Confirmation	Environmental Con- firmations					

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1001-1AD50-0AA0


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1001-1AD50-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1001-1AD50-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1001-1AD50-0AA0&lang=en

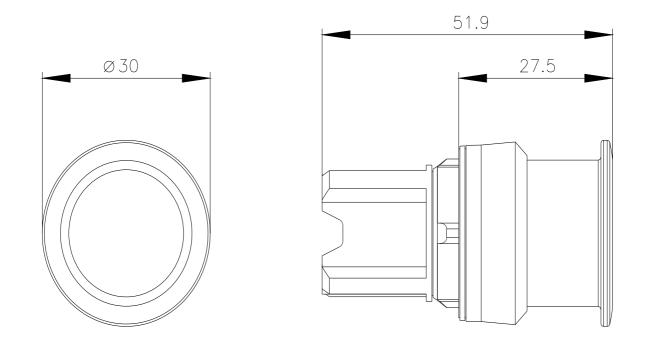

last modified:

1/27/2022 🖸