

MICRO SWITCH

FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING

4CE8

4CE8

M

DRAWING
NUMBER

10

ISSUE

REPLACES

RELEASE NO. PR-8621

CHECK

09APR07

KSR

15 NOV 85

CHECK

09APR07

KSR

15 MAY 80

CHECK

09APR07

KSR

15 MAY 80

CHECK

09APR07

KSR

15 MAY 80

CHECK

09APR07

KSR

15 MAY 80

CHECK

09APR07

KSR

15 MAY 80

CHECK

09APR07

KSR

15 MAY 80

CHECK

09APR07

KSR

15 MAY 80

CHECK

09APR07

KSR

15 MAY 80

CHECK

09APR07

KSR

15 MAY 80

CHECK

09APR07

KSR

15 MAY 80



CHECK

09APR07



KSR

15 MAY 80

CHECK

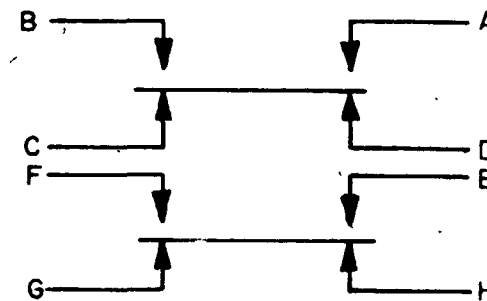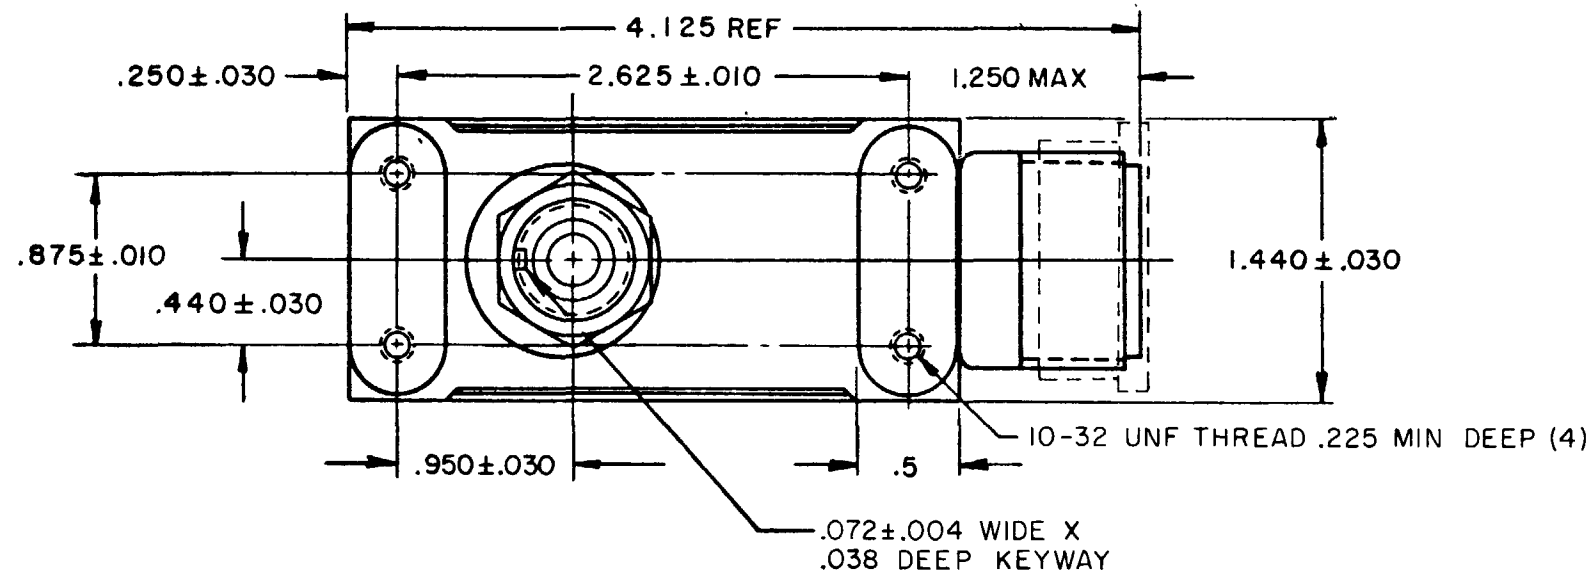


CIRCUIT DIAGRAM

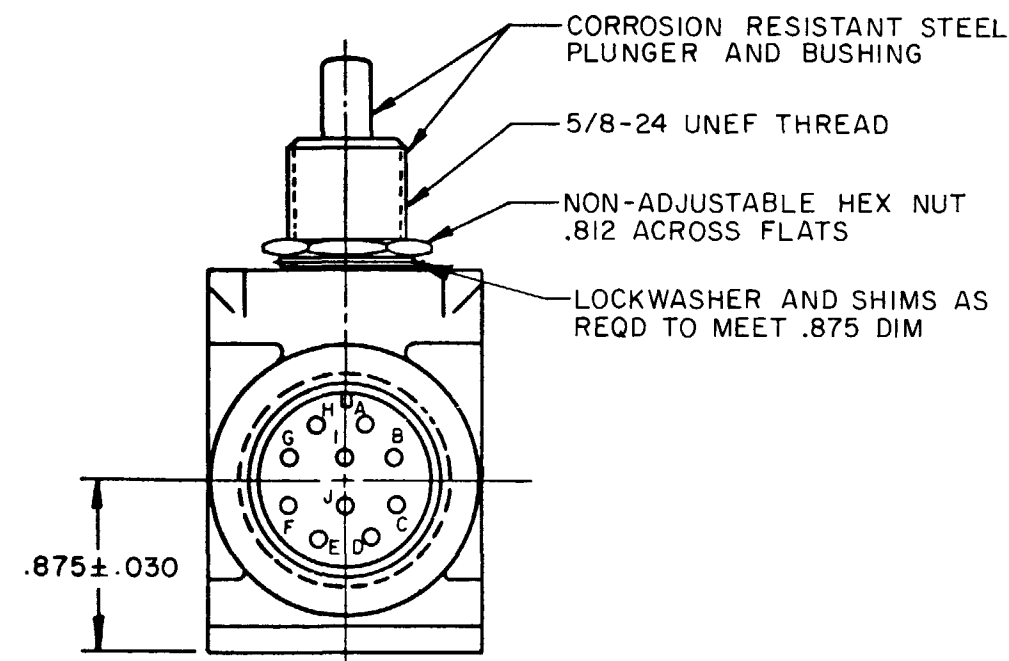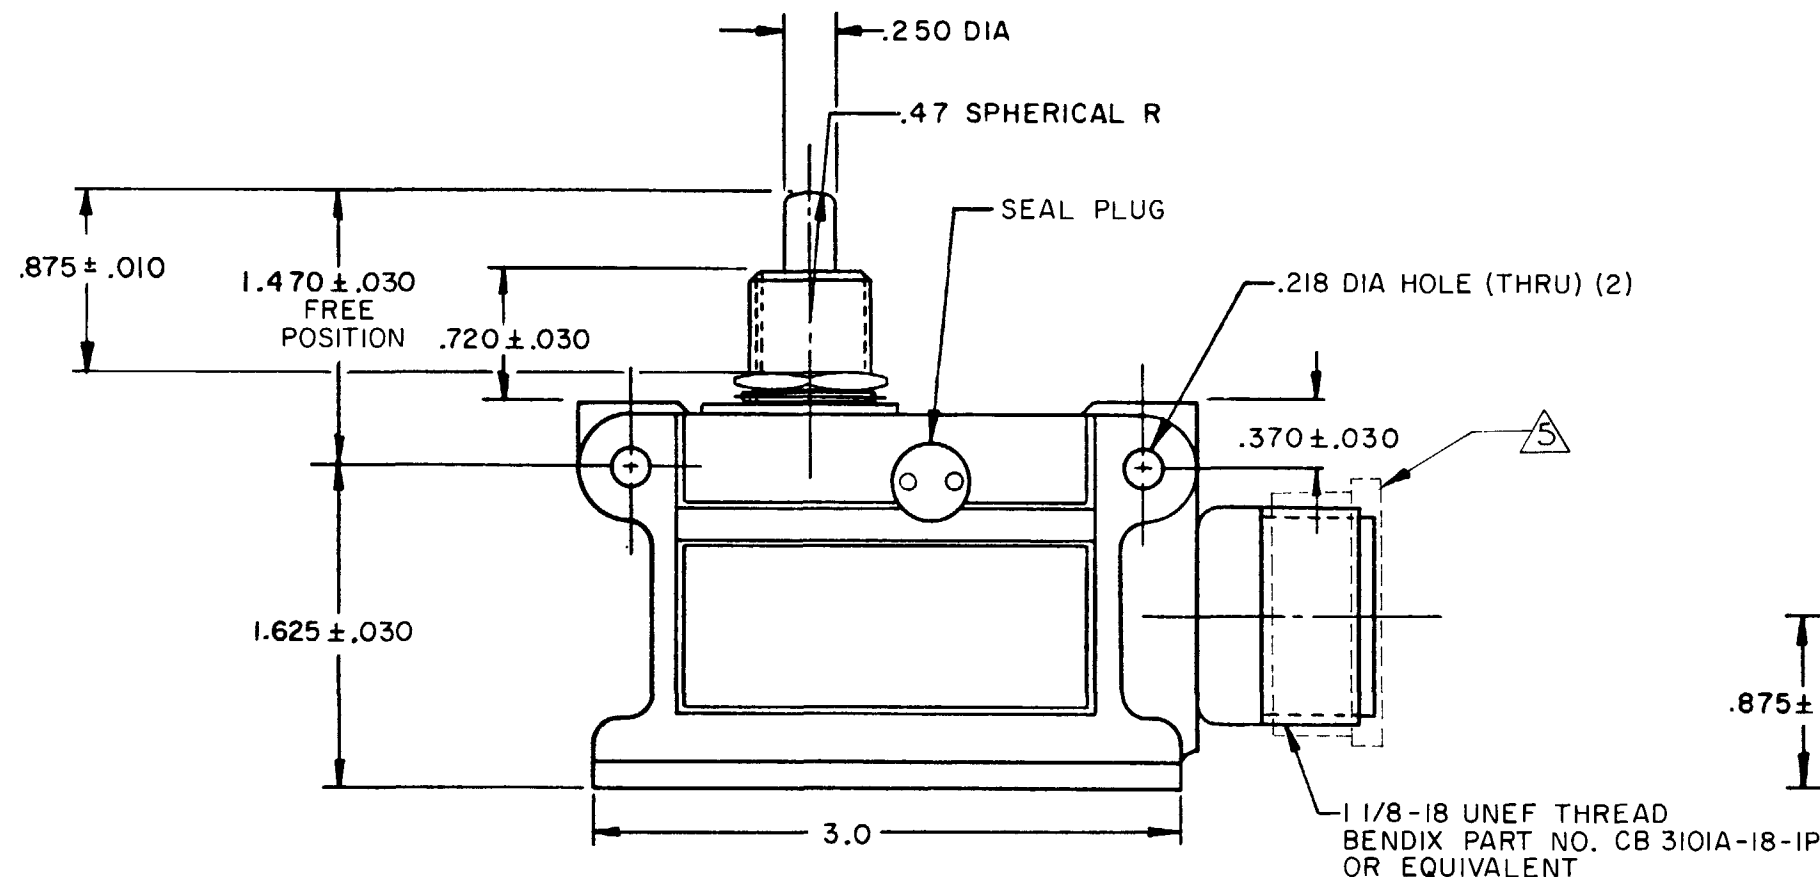

RASTER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
in	mm/in	in	mm/in
NO PLACES	1/64	X X	0.01/0.16
ONE PLACE	X, X	X X	0.01/0.16
TWO PLACES	X, XX	X XX	0.01/0.16
THREE PLACES	X, XXX	X XXX	0.01/0.16
ANGLES			

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

RAW MATERIAL-COMMERCIAL STANDARD
MICRO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE MET BEFORE
PROTECTIVE COATINGS ARE APPLIED

WEIGHT 12.5 OZ MAX

NOTES

- 1 ALUMINUM ALLOY ENCLOSURE ANODIZED, IMPREGNATED AND FINISHED WITH ONE COAT OF PRIMER
- 2 CIRCUIT IDENTIFICATION SHOWN ON HOUSING.
- 3 SHOCKPROOF PER MIL-S-901 GRADE 1, TYPE C, LIGHT-WEIGHT EQUIPMENT WITH NO PHYSICAL DAMAGE
- 4 WATERTIGHT PER MIL-STD-108, TABLE III, METHOD C, AT 1.3 PSI FOR 2 HOURS WHEN USED WITH MATING RECEPTACLE MS3106E-18-1S OR EQUIVALENT

5

FURNISHED WITH SNUG FITTING PLASTIC DUST CAP

FO-52851-A

DRAWN

GJW

16 MAY 80

CHECK

09APR07

KSR