


REVISIONS

A	JO-13812
	DCS
	11 OCT 95
B	REL PR22124
	DCS
	20 MAR 96
C	CO-93311
	TSM
	21 OCT 98

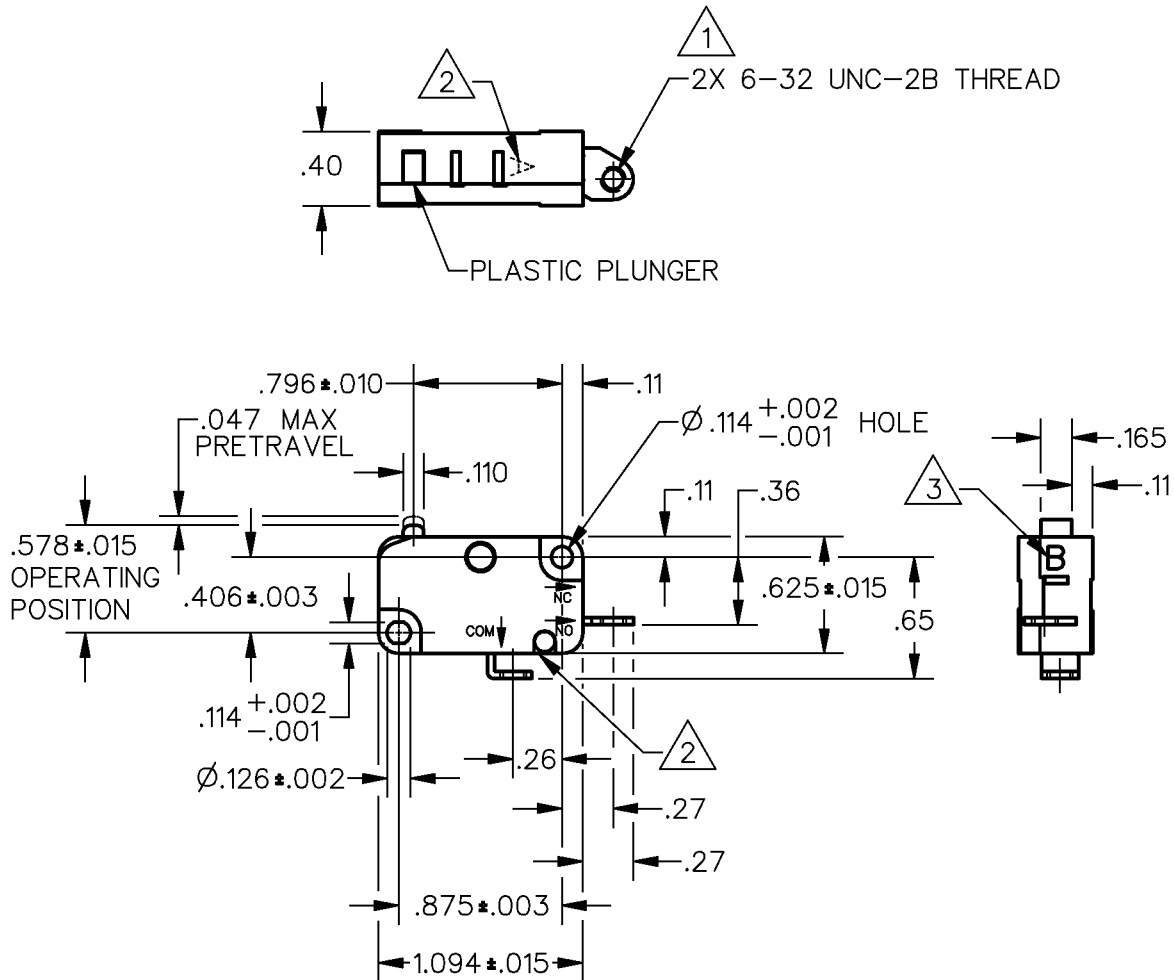


NOTES

- 1 2X 6-32 UNC X .188 LONG TERMINAL SCREWS AND LOCKWASHERS EACH FURNISHED UNASSEMBLED WITH SWITCH IN PACKET
- 2 COMMON TERMINAL IDENTIFICATION
- 3 NORMALLY OPEN TERMINAL IDENTIFICATION
- 4 — ALL METALLIC COMPONENTS (INCLUDING SCREWS AND LOCKWASHERS), EXCEPT FOR RIVETS AND STOP, ARE GOLD PLATED
- 5 — IN INSPECTION, DO NOT BURN OUT — GOLD CONTACTS
- 6 — IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — — 6-14 OZ	CONTACT ARRANGEMENT S P N O	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — — 4 OZ MIN	10A <u>250</u> VAC	ONE PLACE (.0)	± .030
DIFFERENTIAL TRAVEL — — — .002-.010		TWO PLACE (.00)	± .015
OVERTRAVEL — — — — .040 MIN		THREE PLACE (.000)	± .005
FREE POSITION — — — — .625 MAX		ANGLES	±
RELEASE TRAVEL — — — — .007 MIN		WEIGHT	8.3 GRAMS