





PANEL CUT-OUT

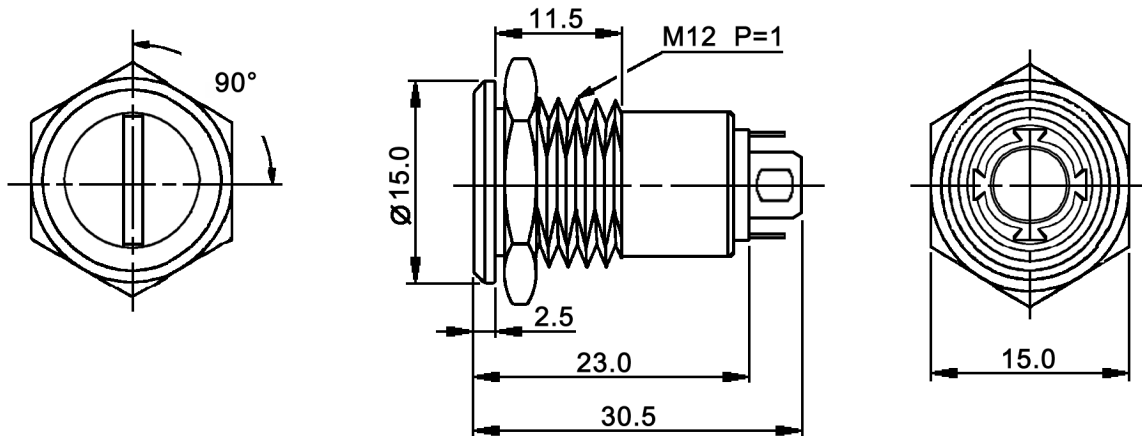

The key pull diagram



Pole	Positions	Terminals	Key pulls	Turn			
1	3	4	3	180°	on	on	on

Specifications:

Contact rating:	200 mA, 125 V AC
Contact resistance:	10 mOhm max.
Insulation resistance:	200 MOhm min.
Dielectric strength:	1000 V, 50 Hz for the duration of 1 minute
Operating temperature:	-20°C to +70°C
Mechanical life:	6 000 steps min.
Material:	Case: zinc alloy, chromium plated
	Contacts / terminals: silver plated
	Key: brass, nickel plated

Compliance: RohS III (2015/863/EU)

Tolerances:			Date	Name	MRK 1343		
			11/09	dr			
					30 19 66		
					knitter-switch		
Specifications	09/22	dr					
Modifications	Date	Name					
						Page	1/1