

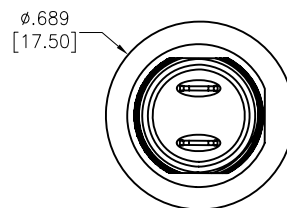
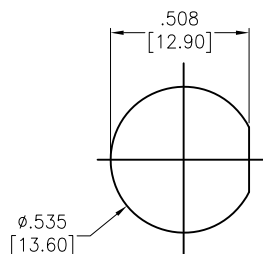
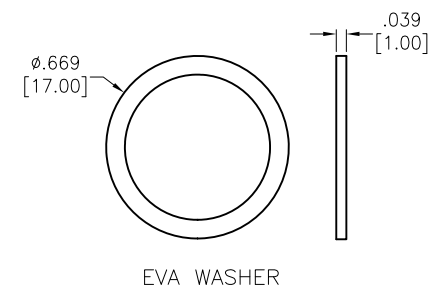

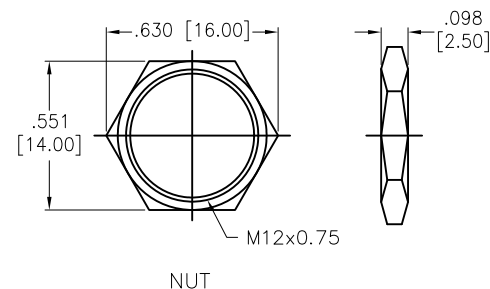
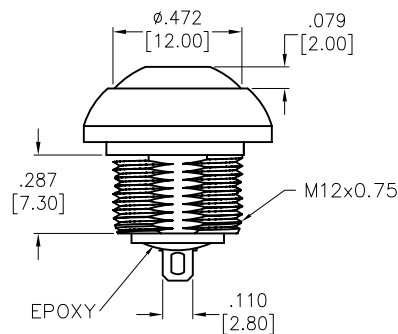


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/18/21	
A		ADDED SPEC.	6/21/21	WX/RC

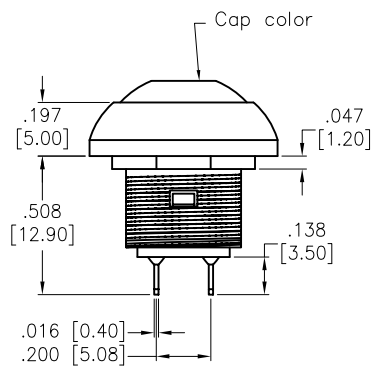

SW-PB11-1CSX-10

CAP COLOR
K=BLACK
R=RED
G=GREEN

SPECIFICATIONS:

Material:

Case: Dially Phthalate, rated UL 94V-0

Cap: Polyamide66, Color: See Chart

Bushing: Polyamide66

Terminal: Gold over Silver Plated

Electrical:

Rating: 400mA 32VAC

100mA 50VDC

125mA 125VAC

500mA 48VAC

200mA 50VDC

Contact resistance: 50 mΩ max

Insulation resistance: 1G-ohms min @500VDC

Dielectric withstanding voltage: 1,000 VAC For 1 Minute

Electrical Life: 500,000 Cycles

Temperature Rating:

Operating temperature: -30°C to +85°C

Environmental:

IP67 front panel protection

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	LH	2/18/21
CHECKED	AC	2/18/21
APPROVED		

ADAM
TECH

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE			
IP67 PUSH BUTTON SWITCH, SOLDER TYPE SPST, OFF-MOMENTARY, GOLD OVER SILVER PLATED			
SIZE X	PART NO. SW-PB11-1CSX-10	REV. A	
REF: S00198T	SCALE: NTS	SHEET 1 OF 1	