

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date

Appr

-

RELEASED

11/24/20

D

D

C



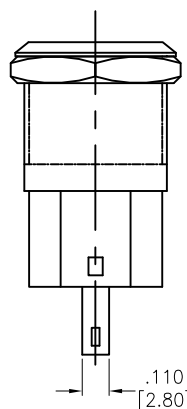
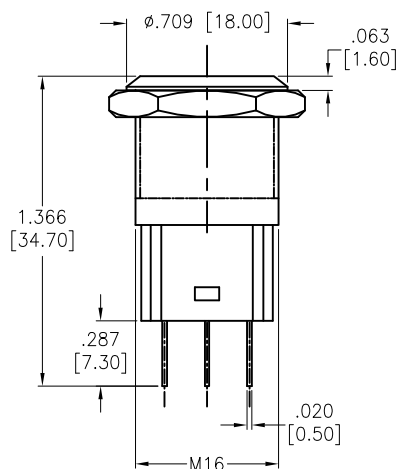


C

B

B

A

A

CIRCUIT DIAGRAM
(SPDT) LATCHINGCIRCUIT DIAGRAM
(SPDT) MOMENTARY

SW-PB2-2EX-A-L1

S= Momentary
Z= Latching

SPECIFICATIONS:

Material:

The crust material: Stainless steel, Copper plated Nickel

Electrical:

Switch Rating: 3A, 250VAC

Contact resistance: 30 mΩ max

Insulation resistance: 100 Mohms min (500VDC)

Dielectric withstanding voltage: 2000 VAC

Temperature Rating:

Operating temperature: -25°C to +55°C

Environmental:

Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DATE

DRAWN

OW

11/24/20

CHECKED

AC

11/24/20

APPROVED

ADAM
TECH909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710TITLE
SWITCH, PUSH BUTTON, PLASTIC WATERPROOF
SPDT, 1NO-1NC, SOLDER TYPE

SIZE

X

PART NO.

SW-PB2-2EX-A-L1

REV.

-

REF: -

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1