



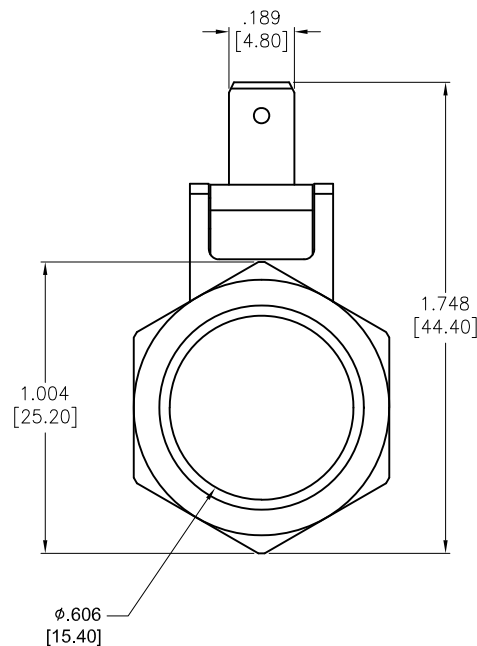


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/2/21	
A		UPDATE SPEC.	11/12/21	WX/RC

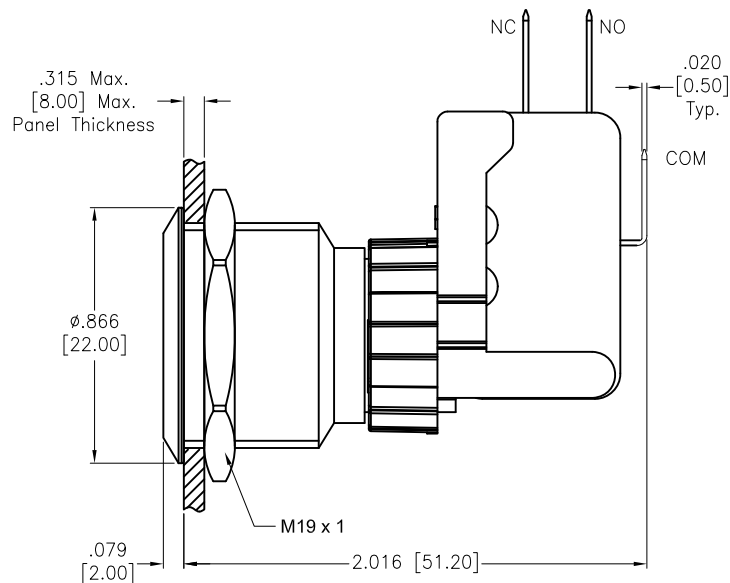

Current Ith Voltage UI	Non electrical inductive load		Inductive load	
	Resistive load	LED load	Inductive load	Electromotor load
AC250	15	2	10	3
DC8	15	4	10	6
DC30	10	4	10	4
DC125	0.6	0.1	0.6	0.1
DC250	0.3	0.05	0.3	0.05

MATERIALS:

1. Bushing & Button: Stainless Steel, Varnish polished
2. Contact: Silver alloy, (4.8mm)
3. Base: POM

SPECIFICATION:

1. Voltage rating: 220V
2. Electrical Life: $\geq 50,000$ cycles.
3. Contact Resistance: $\leq 50m\text{--ohms}$.
4. Insulation Resistance: $\geq 1,000M\text{--ohms}$.
5. Dielectric Strength: 1,500V, RMS 50Hz, 1min.
6. Operating Temperature: $-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$ (No Freezing).
7. Operating Force: About 4N.
8. Operating Travel: About 2.5mm.
9. Torque: About 0.6Nm max. applied to nut.
10. IP Class: IP65.
11. Terminal Type: Pin Terminal (4.8x0.5mm).
12. Switching Circuit: ON-ON.
13. Counterclockwise rotating the Nut, will remove the parts of operation and switch.
14. Tolerance:



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	$\pm .10$	$\varnothing X$	$\pm .10$
.XX	$\pm .020$	$\varnothing XX$	$\pm .015$
.XXX	$\pm .015$	$\varnothing XXX$	$\pm .010$

DRAWN	JJ	11/2/21
CHECKED	RC	11/2/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
SWITCH, ANTI-VANDAL, PUSH BUTTON, HIGH
CURRENT, SPDT, 19mm, LATCHING, ON-ON

SIZE X	PART NO. SW-PB7-06B22FF	REV. A
REF: S00198T	SCALE: NTS	SHEET 1 OF 1