



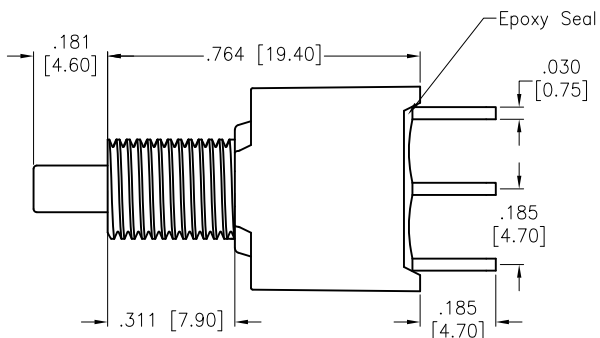


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/18/21	





HEX NUT

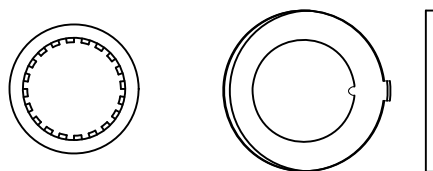


LOCK WASHER

ANTI ROTATIONAL
WASHER

INCLUDED HARDWARE



RECOMMENDED PCB LAYOUT



CIRCUIT DIAGRAM
(SPDT) MOMENTARY

SPECIFICATIONS:

Material:

Movable Contact: Copper Alloy, Silver Plated

Terminal: Copper Alloy, Silver Plated With outer layer in Gold Plating

Electrical:

Voltage rating: 120VAC or 38VDC

Current rating: 1 Amps

Contact resistance: 10 mΩ max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500V RMS @Sea level

Mechanical:

Waterproof: IP68

Temperature Rating:

Operating temperature: -30°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	LH	2/18/21
CHECKED	AC	2/18/21
APPROVED		

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE PUSHBUTTON SWITCH, IP68, PCB TYPE SPDT, ON-MOMENTARY, GOLD OVER SILVER PLATED		
SIZE X	PART NO. SW-PB8-AA00A2GE-2	REV. -
REF: S00198T	SCALE: NTS	SHEET 1 OF 1